


THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

PANDUIT PART NO	PACKAGE QTY	MAX BUNDLE DIAMETER MTRT TOOL	MAX BUNDLE DIAMETER PTRT TOOL	"L" LENGTH ±.3" [7]
MRS1S-C4	100	1.0" [25]	1.8" [45]	9.0" [229]
MRS2S-C4	100	2.0" [51]	2.8" [71]	12.2" [310]
MRS4S-C4	100	4.0" [102]	4.8" [122]	18.5" [470]
MRS6S-C4	100	6.0" [152]	6.8" [172]	24.8" [630]

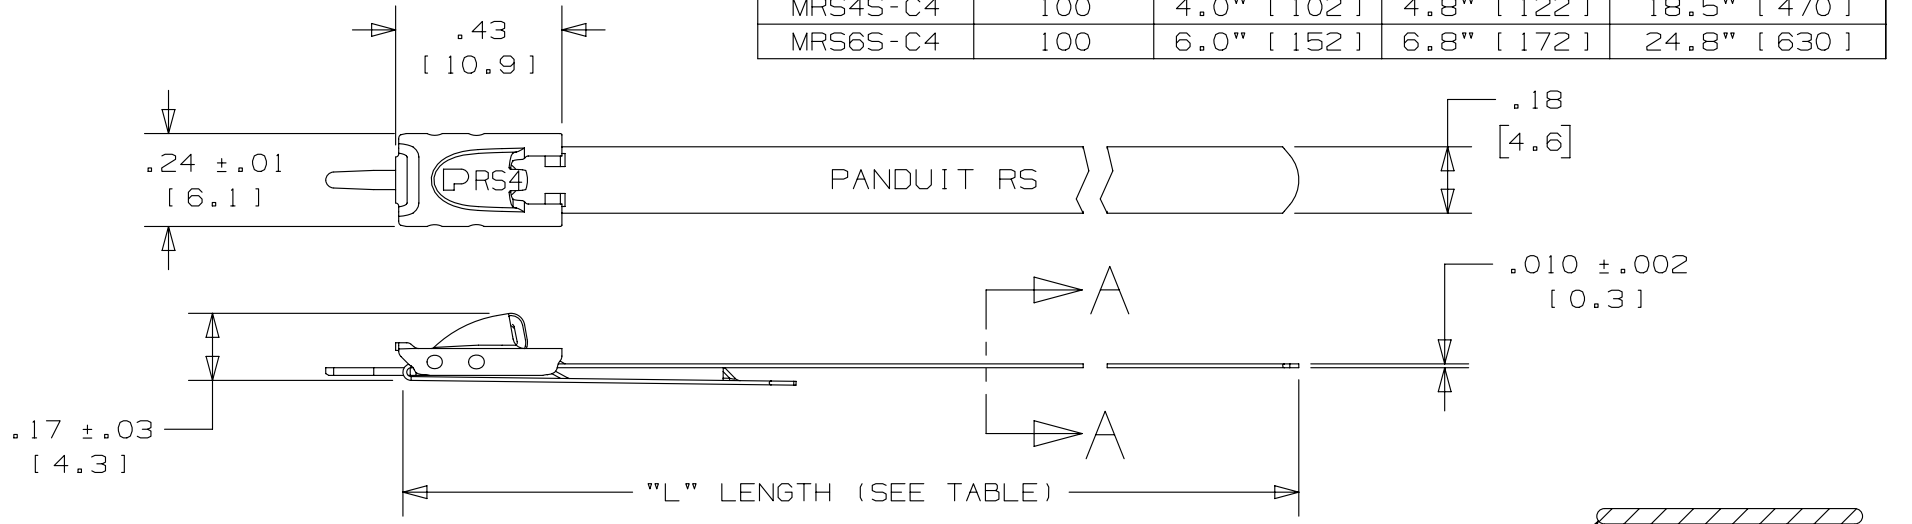

- NOTES:
1. APPLICATION TOOLS - MTRTLS & PTRT
 2. MINIMUM LOOP TENSILE STRENGTH - 180 LBS. (800 NEWTONS) WHEN TESTED ON A 1.5" MANDREL
 3. BRACKETS [] DENOTE DIMENSIONS IN MILLIMETERS, AND ARE SHOWN FOR REFERENCE ONLY
 4. TOLERANCES:
 - .XXX = ±.010 [.25] .XX = ±.02 [.5]
 - .X = ±.03 [.8] ANGLES = ±2°
 5. MATERIAL: 304 STAINLESS STEEL

REV	DATE	BY	CHK	APR	DESCRIPTION	ECN
09A	4/13	JAMB	MIM	RGRO	UPDATE DRAWING TO NEW GLOBAL PANDUIT TITLE BLOCK WITH PANDUIT LOGO	SSECN01056
08A	2/12	MIM	RGRO	---	NOTE [3]: METRIC DIMENSIONS NOTED AS BEING SHOWN FOR REFERENCE ONLY	-----

TITLE		METAL TIE - STANDARD SERIES RETAINED TENSION - 360° RADIAL SEAL		
CUSTOMER DRAWING				
ITEM REVISION NAME		N41255BS/09		
DATASET FILE NAME		N41255BS_DC/09A		
UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: IN [mm]		MATERIAL:		
.x ± .1 [2.54] .xxx ± .005 [.127]		304 STAINLESS STEEL		
.xx ± .01 [.25] ANGLES ± 5 °		DRAWING NUMBER:		
		N41255BS_DC		
DRAWN BY	DATE	CHK	SCALE	SHT 1 OF 1
JAMB	2/12	EJD	2:1	A