


.XXX ±0.05


THIS IS A C.A.D. GENERATED DRAWING DO NOT MAKE MANUAL REVISIONS TO MASTER.



**ISSUE NUMBER** ORIGINAL

(1)

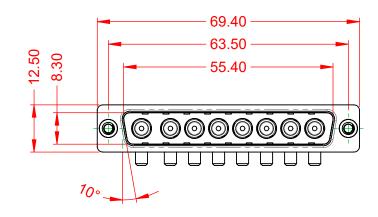




NOTES:

MATERIAL: HOUSING: SHELL: CONTACT:

**OPERATING TEMPERATURE:** 

THERMOPLASTIC POLYESTER, UL94V-0 STEEL, NICKEL PLATED COPPER ALLOY, 30µ" GOLD PLATED




**POWER/CO-AX CONTACT RATING:** (IF PRESENT) SIGNAL CONTACT CURRENT RATING: 5A PER CONTACT SIGNAL CONTACT RESISTANCE:  $10m\Omega$  MAX. **INSULATOR RESISTANCE:** 5000MΩ min. DIELECTRIC

WITHSTANDING VOLTAGE:

30A (CURRENT)

-55°C ~ 125°C

1000V AC rms



			SW REFERENCE NO.: 629 COMBO ASSEMBLY		
	COMBINATION	COMBINATION D-SUB		DATE: JAN. 01/20	19
			CHECKED:	DATE:	
IS TO	EDAC INC	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF EDAC INCAND	SCALE: (IN C.A.D. 1:1)	SHEET 1 OF	2
CTIVES IANCY.		SHALL NOT BE REPRODUCED, OR COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.	DRAWING NUMBER: 629-8W8-650-3N2		ISSUE
			PART NUMBER: 629-8W8-	-650-3N2	1



THIS SERIES FULLY CONFORMS THE EUROPEAN UNION DIRECT 2011/65/EU FOR RoHS COMPLIA

