

REV. 0

DCO 16185


COIL: @ 25°C  
 RESISTANCE \_\_\_\_\_ 10000 OHMS ±20%  
 NOMINAL VOLTAGE \_\_\_\_\_ 94.0 - 114.0 VDC  
 MUST OPERATE \_\_\_\_\_ 63.0 VDC  
 \_\_\_\_\_  
 MUST RELEASE \_\_\_\_\_ 39.5 VDC MAX., 12.5 VDC MIN.

ENVIRONMENT:

VIBRATION \_\_\_\_\_ 10 \_\_\_\_\_ CPS TO \_\_\_\_\_ 2000 \_\_\_\_\_ CPS @ \_\_\_\_\_ 30 \_\_\_\_\_ g's  
 SHOCK \_\_\_\_\_ 100 \_\_\_\_\_ g's \_\_\_\_\_ 11 \_\_\_\_\_ MS. DURATION  
 TEMPERATURE \_\_\_\_\_ -65 \_\_\_\_\_ °C TO \_\_\_\_\_ +125 \_\_\_\_\_ °C

NOTES: \_\_\_\_\_ OPERATE 5 MS MAX.  
 \_\_\_\_\_ RELEASE 4 MS MAX.  
 \_\_\_\_\_ CONTACT BOUNCE 2.5 MS MAX.

CUSTOMER DATA SHEET

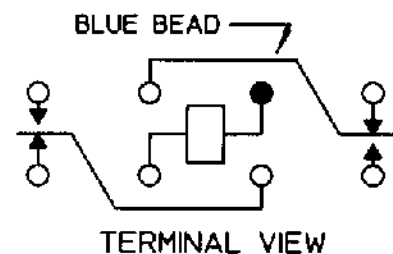

CONTACT RATING: LOW LEVEL TO 2 AMPS  
 28 VDC RESISTIVE 100,000 OPERATIONS

DR. B.D. 3/23/00

CK. ~~3/23/00~~



COMMUNICATIONS  
 INSTRUMENTS, INC.

CUST. \_\_\_\_\_ GENICOM  
 CUST. NO. \_\_\_\_\_ 3SAF5002T1 \_\_\_\_\_ REV. \_\_\_\_\_

'FW' RELAY

FW1101S06