	I	Q	н <b>т</b>	m	0







Keying Shown as example

ΙE

S

F

## CHARACTERISTICS

-Salt Spray

BASIC SERIES:

SHELL SIZE : 11

SHELL TYPE : Square Flange Receptacle

PLATING : X = Without Plating

Н

CONTACT TYPE : Standard Crimp Contact

-Mass

ယ

 $\sim$ 

-Standard : Based on MIL-DTL-38999 Series III

-Shell Material	: Composite
-Shell Plating	: Without Plating
-Insulator	: Thermoplastic
-Contacts	: Copper Alloy
-Seals & Gromme	t : Silicon Elastomer
-Contact Plating	: Gold over copper Alloy 0.8µm minimum
-Durability	: 500 Mating cycles
-Delivered with S	ouriau contacts and Accessories
-Temperature Ra	nge65°C to +175°C

: 2000 hours

: 13.3 g ± 10%

8D 0

G


11

Х

01

Dim	Nominal	
Р	3.25±0.2	
PP	4.93±0.2	
R1	20.62	
R2	18.26	
S	26.2±0.3	
V	20.83+0/-1.25	
W	2.1/2.5	
Z	31.5 Max	
VV THREAD	M15x1-6g	

Е

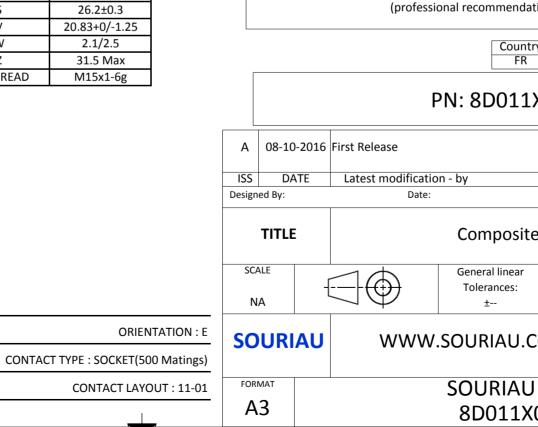

D

0							
					4		
LAY	YOUT SHOWN AS EXA	MPLE			3		
SOURIAU shall not be liable for any non-conformity or damage due to a use of the Products which does not comply with the Specifications issued by either of the Parties or by a third party (professional recommendation, technical notice.)							
	FR		Not Listed		2		
PN: 8D011X01SE							
First Release							
Latest modificatio	n - by			MOD N°			
Date: CUSTOMER DRAWING   Composite Receptacle 8D series							
$\exists \Theta$	General linear Tolerances: ±		NPRDS / PROJECT <b>859</b>		1		
WWW.SOURIAU.COM   This document is the property of SOURIAU     it must not be reproduced or communicated without permission							
	SOURIAU			SHEET			
С	8D011X0	ISE-C B	A	1/2	J		
-							

		۵	г т	m		0
		Contact Layout				Panel Cuto
4		01			<u>A</u>	SQUARE FLANGE RECEPTACLE (TYPE 0)
		1#12 11-01	]		۸ ۲	ØT
ى	Ctc A	X Y 0 0				Dim ØA ØAA R1 ØT
						SOURIAU shall not be liable for ar due to a use of the Products w the Specifications issued by either c
2						(professional recommenda Count FR PN: 8D011
					A 08-10-20 ISS DATE Designed By:	16 First Release Latest modification - by Date:
-					SCALE NA	General linear Tolerances:
			_		FORMAT A3	SOURIAU 8D011X
	Н	G	l F	I E	D	C

