

т	۵	н <b>п</b>	т	0



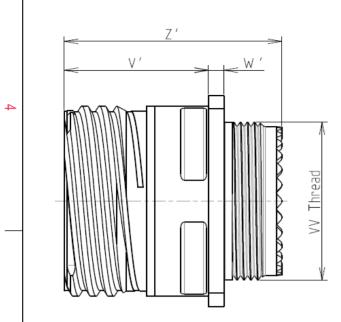



LAYOUT SHOWN AS

Keying Shown as example

## CHARACTERISTICS

BASIC SERIES:

SHELL SIZE : 11

PLATING : M = Nickel

Н

SHELL TYPE : Square Flange Receptacle

CONTACT TYPE : Standard Crimp Contact

ယ

 $\mathbf{N}$ 

-Standard : Based on MIL-DTL-38999 Series III

: Composite			
: Nickel			
: Thermoplastic			
: Copper Alloy			
: Silicon Elastomer			
: Gold over copper Alloy $0.8 \mu m$ minimum			
: 500 Mating cycles			
-Delivered with Souriau contacts and Accessories			
: -65°C to +200°C			
: 2000 hours			
: 9.3 g ± 10%			

8D 0

G

11

Μ

02

Ρ


F

В

Connector dimension			
Dim	Nominal		
Р	3.25±0.2		
PP	4.93±0.2		
R1	20.62		
R2	18.26		
S	26.2±0.3		
V	19.5+1.4/-0		
W'	2.1/3.65		
Ζ'	32 Max		
VV THREAD	M15x1-6g		

Е

SOURIAU shall not be liable for due to a use of the Products the Specifications issued by either (professional recomment

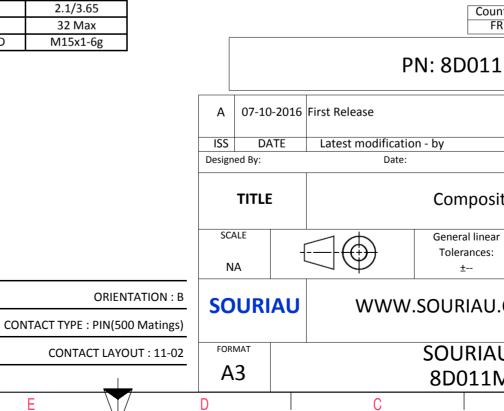

	Φ		А		
		•			4
	Re				4
		JA .			
S EXA	AMPLE				3
· any i	non-conformit	y or damage			
s whic	h does not co he Parties or b	mply with			
	on, technical n		-		
untry FR					
1M02PB					
		CUSTOME	R DRAWING	MOD N°	
ite	Recentaci				
ane	Receptacl				
ar :			/ PROJECT 3 <b>59</b>		1
	This document is the property of				
J.CC	COM it must not be reproduced or communicated without permission				
	J DRG N° SHEET				
	2PB-C			1/2	
	В		А		-

ſ	т	D		п	m	D	0	
		Contact Layout						Panel Cutou
4	 0. (2.	+Y IB IA IA IA IA IA IA IA IA IA IA					SQUARE FLANGE RECEPTACL REAR MOUNTING	
	Com posi IL A B Shell Arrangement size no. 11 -2	tion X-axis Y-axis (mm) (mm) A +.095 (2.41) +.000 (.00) B095 (2.41) +.000 (.00)	Contact ocation All				L C	Dim
ω								ØA ØAA R1 ØT
	-						due to a us the Specificatio	Il not be liable for an se of the Products wh ons issued by either of ssional recommendat
N								PN: 8D011N
						ISS I Designed By:		e:
_						SCALE NA		General linear Tolerances:
						FORMAT	<b>XIAU</b> WWV	V.SOURIAU.C
	Н	G		F	E total	A3	C	8D011M
						v		

