

1

2

3

4

5

6

7

A

A

B

B

C

C

D


D

E

E




F

F

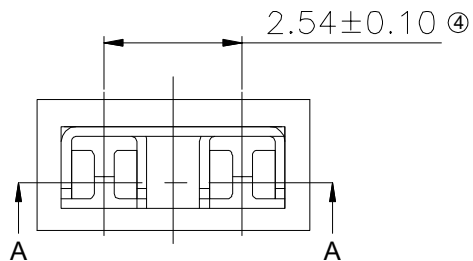

NOTES:

- 1. Insulator: PBT+30% G.F, UL94V-0, Black
- ④ 2. Contact : Phosphor Bronze, Au or Sn over Ni
- 3. Current Rating: 3.0AMP
- 4. Dielectric Withstanding Voltage: 1000V AC/ minute
- ④ 5. Insulation Resistance: 500MΩ Min.
- ④ 6. Contact Resistance: 20mΩ Max.
- 7. Operating Temperature: -40°C ~ +105°C
- ③ AKSNT/x BLACK
 - Contact Area Plating: ③
 - G: Gold Flash
 - Z: Tinned

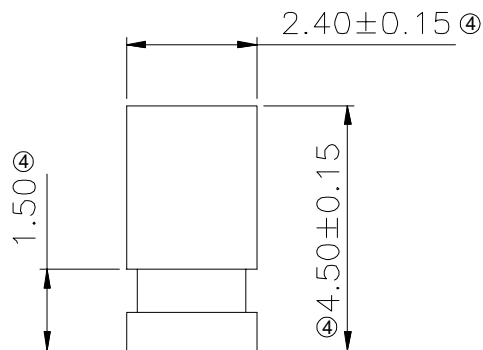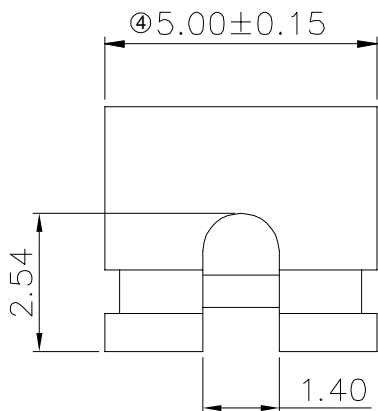

SECTION A-A

G

G

H

H

RoHS compliant
Unit:mm

Scale	Free				Date	Name	Customer-No.
TOLERANCE					Drawn	03.03.2004	Hellwig
X.	±0.35						
X.X	±0.25	④	Update the dimension and tolerance	02.03.2022	Peter	Approved	02.03.2022
X.XX	±0.20	③	Update	07.06.2013	Winnie		
X.XXX	±0.15	②	Update	27.07.2009	Rale		
DIM	TOL	①	Drawn	03.03.2004	Hellwig		
Angle	TOL	Id.	Modification	Date	Name		



Drawing-No.	ASS 1004 CO	rev04
Replace	SHEET 1 / 1	

1

2

3

4

5

6

7