


## T340A475M010AT7301

Aliases (T340A475M010ATTR)

T340, Tantalum, MnO<sub>2</sub> Tantalum, Commercial Grade, 4.7 uF, 20%, 10 VDC, 8 Ohms, Lead Spacing = 2.5mm

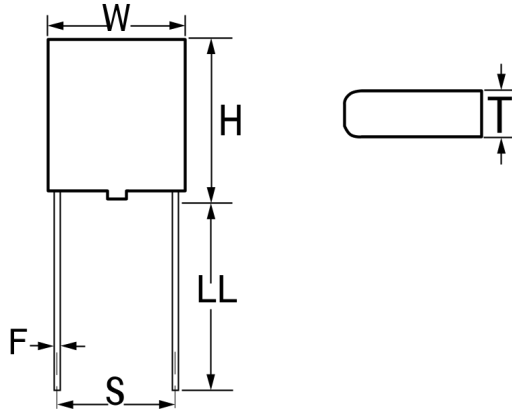

Click [here](#) for the 3D model.

### Dimensions

W	4.7mm MAX
H	7.3mm MAX
T	4.2mm MAX
S	2.5mm +/-0.5mm
LL	15mm +/-2mm
F	0.5mm +/-0.03mm

### Packaging Specifications

Packaging	T&R, 305mm
Packaging Quantity	1000

### General Information

Series	T340
Dielectric	MnO <sub>2</sub> Tantalum
Style	Radial Molded
Description	Radial, Solid Tantalum, Molded
RoHS	Yes
Termination	Tin
AEC-Q200	No
Construction	Molded
Miscellaneous	Includes Standoff Height of 0.38 +/- 0.13mm.
Notes	Longest Lead Is Positive.

### Specifications

Capacitance	4.7 uF
Capacitance Tolerance	20%
Voltage DC	10 VDC (85C), 7 VDC (125C), 0.1 VDC (125C Reverse)
Temperature Range	-55/+125°C
Dissipation Factor	6%
Resistance	8 Ohms (100kHz)
Leakage Current	1 uA