

Ratings

Voltage: 150 V
 Temperature: -40 ~ 70 °C

Conductor

Conductor count: 4 (2 twisted pair)
 Gauge: 28 AWG 0.08 mm²
 Material: tinned copper strands
 Strand size: $\varnothing 0.05 \times 40$
 Resistance at 20 °C: 240 Ω /km max

Insulator

Material: HDPE
 Color: white, green (1P) / black, red (1P)
 Diameter: $\varnothing 0.08$ mm
 Nominal thickness: 0.15 mm
 Resistance at 20 °C: 100 M Ω /km min

Shield

Type: aluminum mylar + tinned copper spiral
 Coverage: 85% min spiral, 100% foil
 Stranding: $\varnothing 0.08$ mm x 72

Outer jacket



Material: TPU
 Color: black
 Diameter: $\varnothing 3.3^{+0.10} - 0.20$ mm
 Nominal thickness: 0.30 mm

Filler

Material: aramid fiber

Tests

Tensile strength: 35.7 kgf
 Dielectric test: 1500V dc for 1 minute without breakdown
 Bend test at 200 g, $\pm 90^\circ$, 30 cycles/min: 15,000 cycles minimum

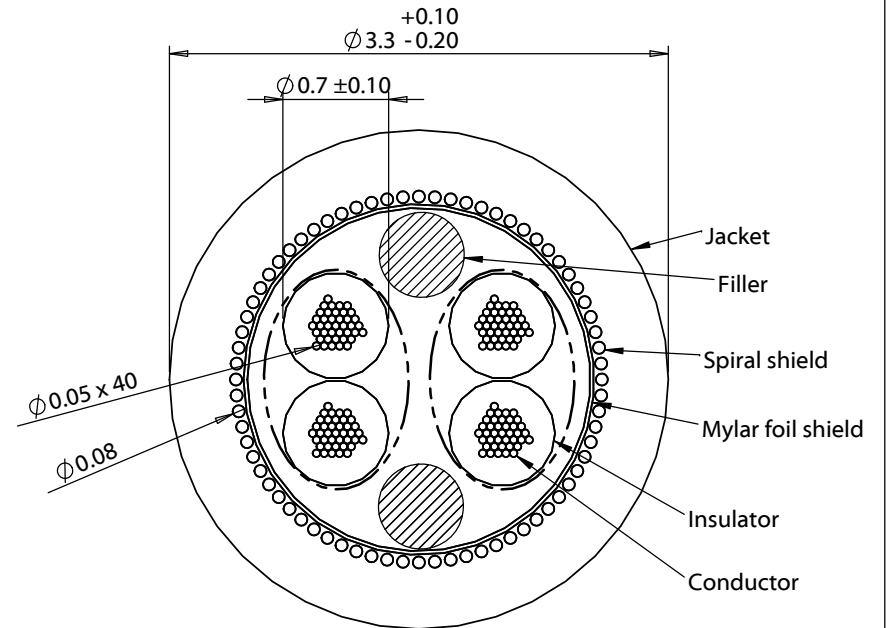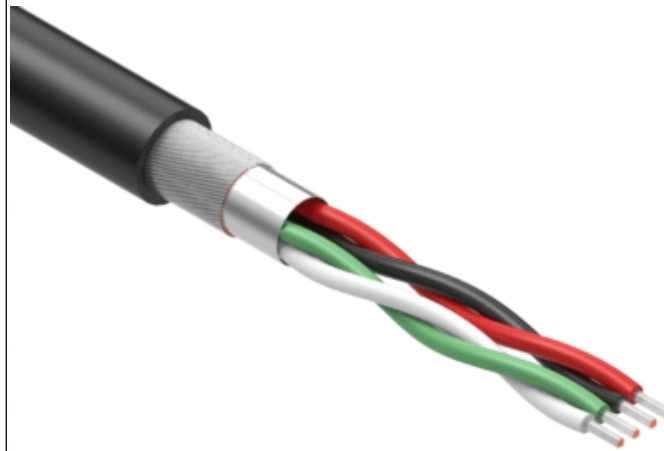

Revision:	Date:	Description:	Prepared:	Notes: RoHS compliant Jacket meets ISO 10993 for biological compatibility Phthalate and halogen free Function test: no open, no short, no intermittent	TENSILITY tel 1.541.323.3228 800 877.670.7118 fax 1.541.323.4202 web tensility.com
A	1/11/21	Initial release	Verified:		
			Dimensions are in millimeters. Tolerances: X: ± 0.5 mm X.X: ± 0.3 mm X.XX: ± 0.05 mm	Description: Wire, 4C, 2PR TS, 28 AWG, 150V, 70C, 3.3 mm, shielded, TPU, WBL	Size: A Part number: 30-01639
					Scale: 20:1 Sheet 1 of 1

5

4

3

2

1