


USED ON —

PART NUMBER	L		MAX CUT LENGTH		MAX IL (dB)
	MAX	MIN	MAX	MIN	
5492006-1	50.50	49.50	50.50	50.00	0.57

DWG NO
5492006

THIS DRAWING IS A CONTROLLED DOCUMENT.

- △1 CUT STRAIN RELIEF AT RIB
- 2 SEE TABLE FOR MAXIMUM INSERTION LOSS.
- △3 PLACE TRACE LABEL ON ITS UNIT PACKAGE.
- 4 PRODUCT AND PROCESSING MUST MEET REQUIREMENTS OF TYCO ELECTRONICS STANDARD 230-702

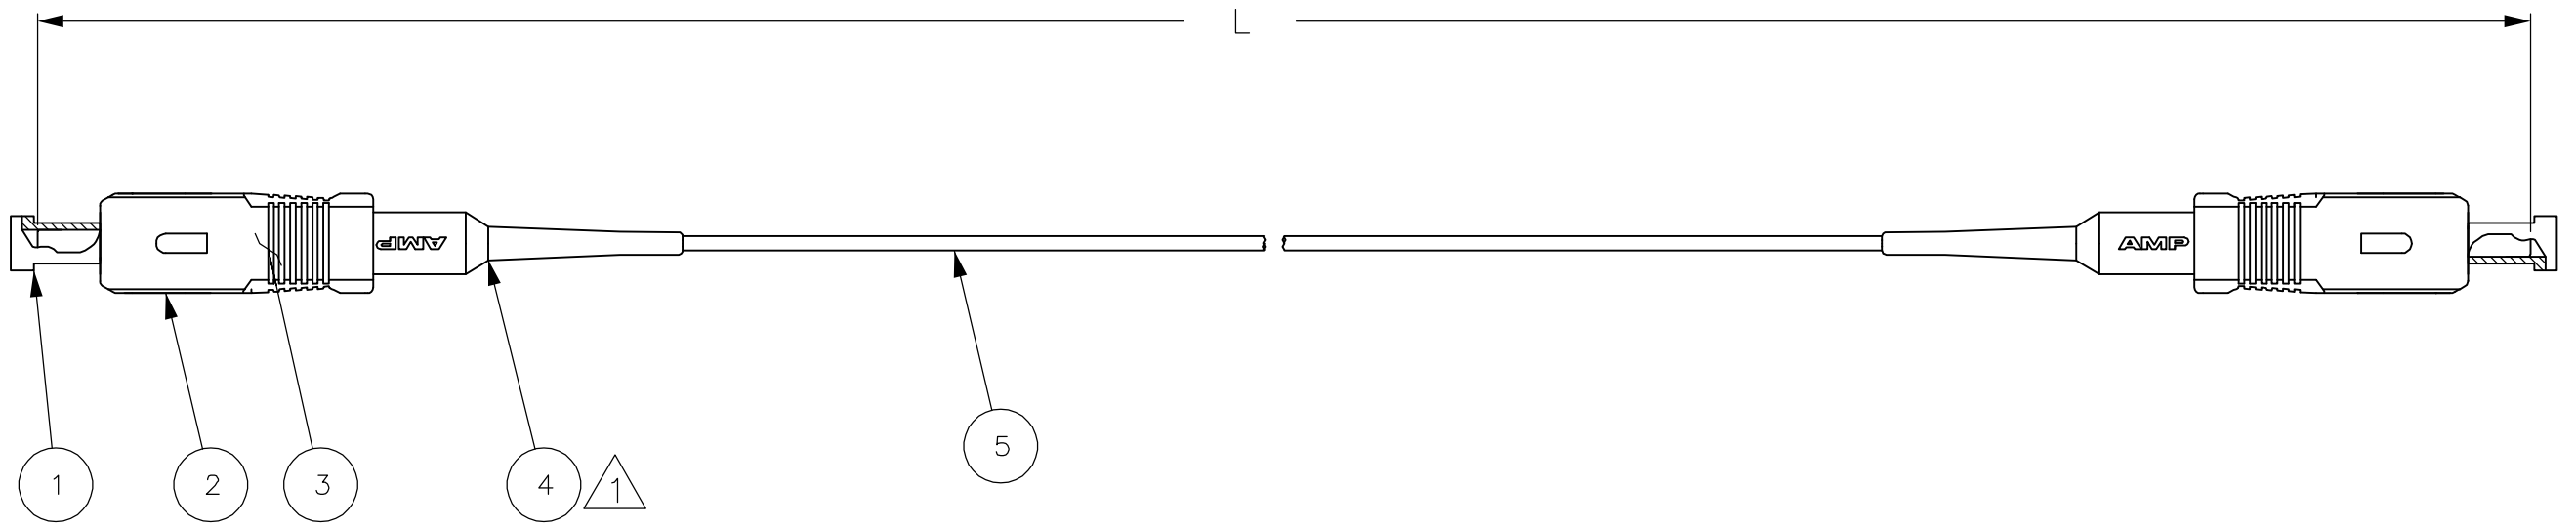

△3	1	905835-1	TRACE LABEL	6
	AR	5599200-6	62.5/125μm BUFFERED FIBER	5
	2	6457493-3	BARE BUFFER BOOT	4
	2	503975-1	CONN SUBASSEMBLY	3
	2	502884-3	CONNECTOR HOUSING	2
	2	503960-1	DUST COVER	1
	QTY PER ASSEMBLY	PART NUMBER	DESCRIPTION	ITEM NO

THIS INFORMATION IS CONFIDENTIAL AND PROPRIETARY TO TYCO ELECTRONICS CORPORATION AND ITS WORLDWIDE SUBSIDIARIES AND AFFILIATES. IT MAY NOT BE DISCLOSED TO ANYONE, OTHER THAN TYCO ELECTRONICS PERSONNEL, WITHOUT WRITTEN AUTHORIZATION FROM TYCO ELECTRONICS CORPORATION, HARRISBURG, PENNSYLVANIA USA.

LOC
CE
DIST
17

	A	RELEASED PER NPR	27 JAN 06	CSV	JD	
P	LTR	REVISION RECORD	DATE	DWN	APVD	

DIMENSIONS: METERS		TOLERANCES UNLESS OTHERWISE SPECIFIED:	
	0 PLC	±	-
	1 PLC	±	-
	2 PLC	±	-
	3 PLC	±	-
	4 PLC	±	-
ANGLES ±		-	
SURFACE TEXTURE			

DWN	27 JAN 06	MATERIAL	C.S. VASU	HEAT TREAT	-
CHK	27 JAN 06				
APVD	27 JAN 06	Tyco Electronics Corporation Harrisburg, Pa 17105-3608			
NAME J. DUNCAN					
CABLE ASSEMBLY, FIBER OPTIC, 62.5/125 FIBER OPTIC, AMP SC (NG) TO AMP SC (NG), OPTIMATE					
SCALE	1:1	SIZE	A3	DRAWING NO	5492006
SHEET	1	OF	1	REV	A