



48 x 48mm

Features :

- On delay/ Interval
- 12 time ranges
- Integrated Dual Voltage
- LED Indications: Power ON, Relay ON
- Finger safe terminals
- Better repeat Accuracy

Certifications :

Display specifications

LED indications	Power ON, Relay ON
-----------------	--------------------

Input specifications

Accuracy Setting	±5% of F.S.
Repeat	± 0.5% or 50msec (F.S. = Full scale)

Output specifications

Relay contact	2 C/O SPDT
Contact rating	5A @ 250V AC or 24V DC resistive

Functional specifications

Modes	On delay/ Interval
Time ranges	0 - 1sec / min / hr 0 - 3sec / min / hr 0 - 10sec / min / hr 0 - 30sec / min / hr
Resolution	0.1sec
Reset	On power interruption, Reset time <100 msec

Auxiliary supply specifications

Supply voltage	20 to 240V AC (50 / 60Hz), 12 to 240V DC
Power consumption	2VA max


Environmental specifications

Temperature Operating	0 to 50oC (32 to 122oF)
Storage	-20 to 75oC (-4 to 167oF)
Humidity (non - condensing)	95% RH


Mechanical specifications

Mounting	Plug/ Panel mount
Weight	100gms


Dimensions

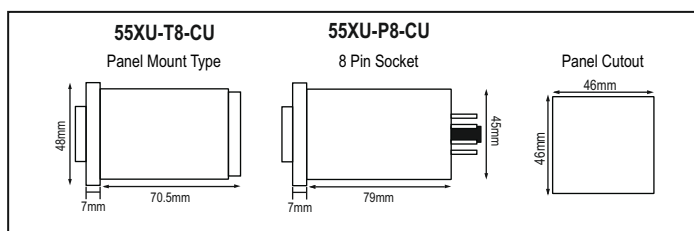

Terminal connections

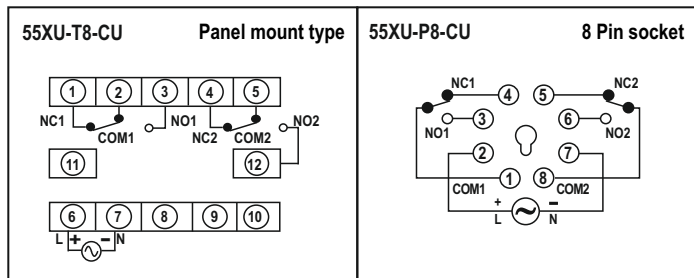

Timing diagram

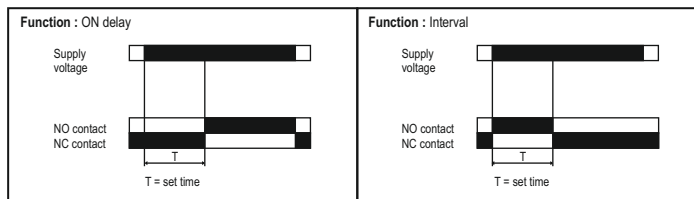

Ordering information

Product code	Supply voltage	Certification
55XU-P8-CU	20 to 240V AC, 12 to 240V DC	
55XU-T8-CU	20 to 240V AC, 12 to 240V DC	