



FocusLCDs.com
LCDs MADE SIMPLE®

Ph. 480-503-4295 | NOPP@FocusLCD.com

TFT | CHARACTER | UWVD | FSC | SEGMENT | CUSTOM | REPLACEMENT

TFT Display Module

Part Number

E70RG68048LWAM400-N

Overview:

- 7.0-inch TFT: (165.4x104.59mm)
- 800(RGB)x480 pixels
- 16/18/24-bit RGB Interface
- Super Wide Temp
- White LED back-light
- Transmissive/ Normally Black
- No Touch Panel
- 400 NITS
- Controller: SC5004/SC5005
- RoHS Compliant

Description

This is a color active matrix TFT (Thin Film Transistor) LCD (Liquid Crystal Display) that uses amorphous silicon TFT as a switching device. This model is composed of a transmissive type TFT-LCD Panel, driver circuit and a backlight unit. The resolution of the 7.0" TFT-LCD contains 800x480 pixels and can display up to 65K/262K/16.7M colors.

TFT Features

Low Input Voltage: 3.3V (TYP)

Display Colors: 65K/262K/16.7M


TFT Interfaces: 16/18/24-bit RGB

| General Information Items | Specification | Unit | Note |
|---------------------------|-----------------------------------|---------|------|
| | Main Panel | | |
| TFT Display area (AA) | 152.40 (H) x 91.44 (V) (7.0 inch) | mm | - |
| Driver element | TFT active matrix | - | - |
| Display colors | 65K/262K/16.7M | colors | - |
| Number of pixels | 800(RGB)x480 | dots | - |
| TFT Pixel arrangement | RGB vertical stripe | - | - |
| Pixel pitch | 0.1905 (H) x 0.1905 (V) | mm | - |
| Viewing angle | ALL | o'clock | - |
| TFT Controller IC | SC5004/SC5005 | - | - |
| Display mode | Transmissive/ Normally Black | - | - |
| Operating temperature | -30~+85 | °C | - |
| Storage temperature | -40~+90 | °C | - |


Mechanical Information

| Item | | Min | Typ. | Max | Unit | Note |
|-------------|--------------|-----|--------|-----|------|------|
| Module size | Height (H) | | 165.40 | | mm | - |
| | Vertical (V) | | 104.59 | | mm | - |
| | Depth (D) | | 5.8 | | mm | - |
| Weight | | | TBD | | g | - |

1. Block Diagram

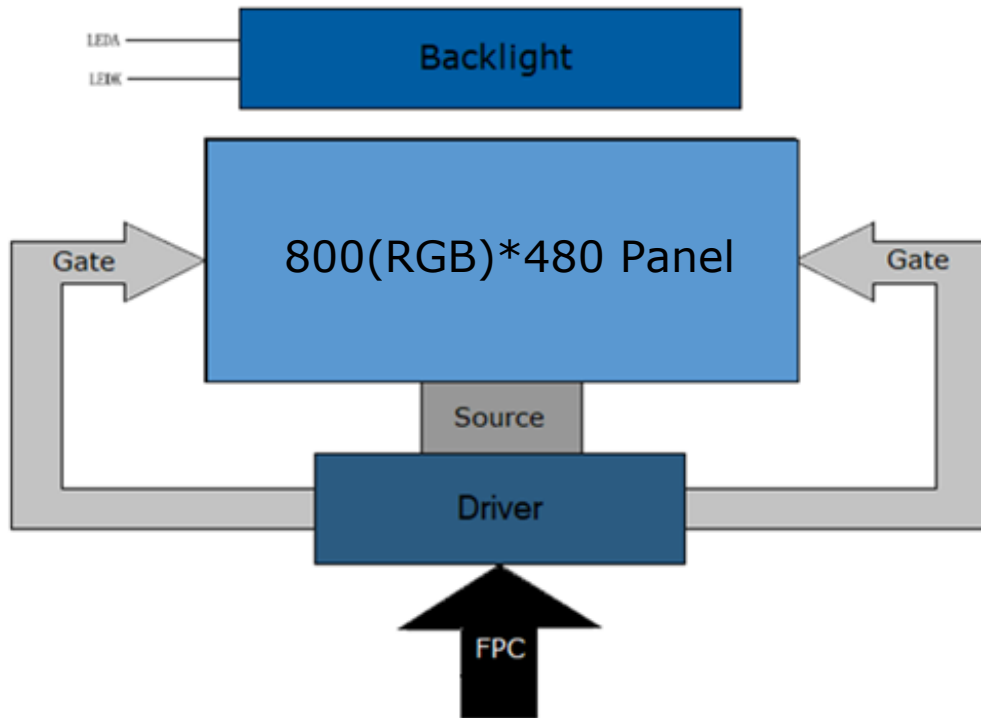

2. Outline Dimensions

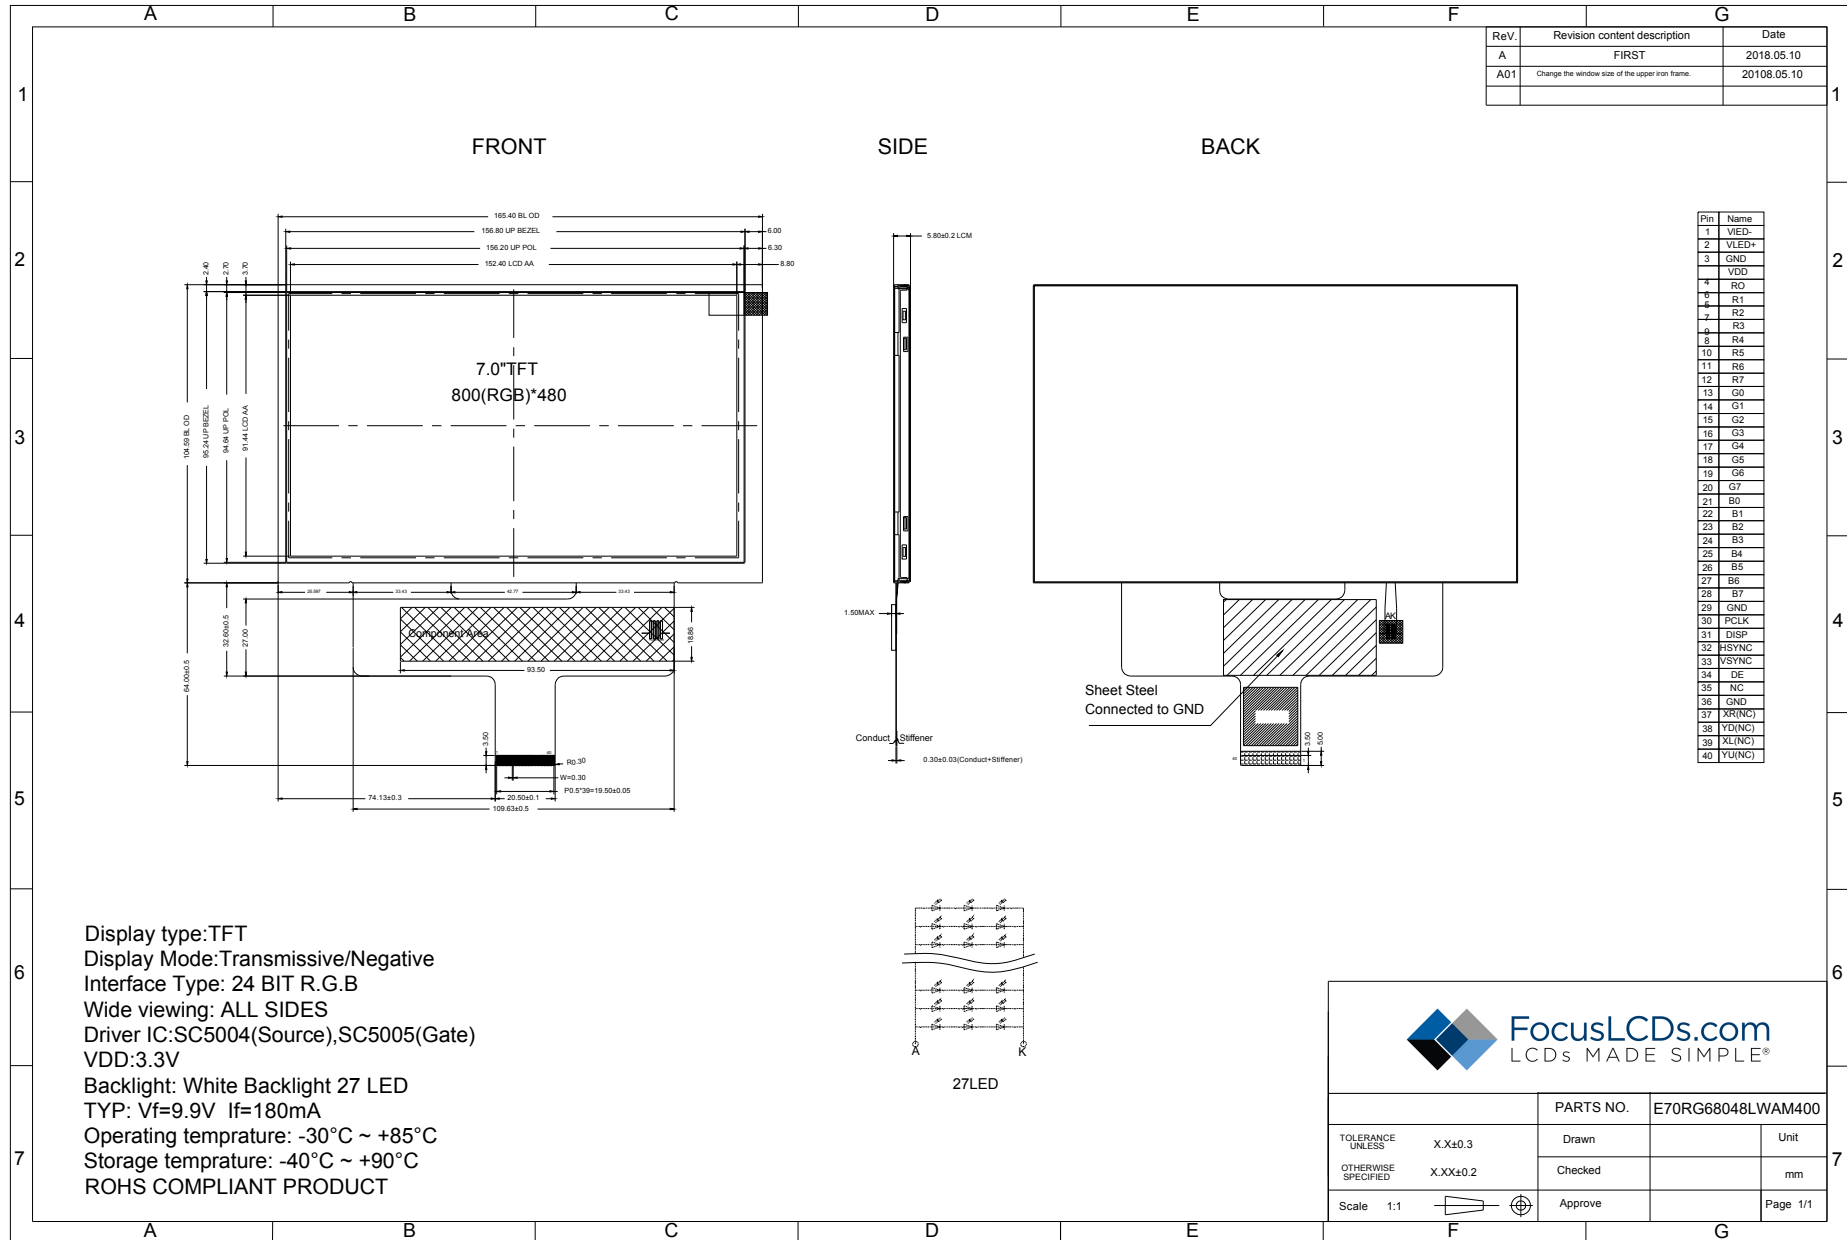

3. Input Terminal Pin Assignment

Recommended Connector: FH12S-40S-0.5SH(55)

| NO. | Symbol | Description | I/O |
|-----|--------|---|-----|
| 1 | LEDK | Cathode pin of backlight | P |
| 2 | LEDA | Anode pin of backlight | P |
| 3 | GND | Ground | P |
| 4 | VDD | Supply voltage (3.3V) | P |
| 5 | R0 | Red data input | I |
| 6 | R1 | Red data input | I |
| 7 | R2 | Red data input | I |
| 8 | R3 | Red data input | I |
| 9 | R4 | Red data input | I |
| 10 | R5 | Red data input | I |
| 11 | R6 | Red data input | I |
| 12 | R7 | Red data input | I |
| 13 | G0 | Green data input | I |
| 14 | G1 | Green data input | I |
| 15 | G2 | Green data input | I |
| 16 | G3 | Green data input | I |
| 17 | G4 | Green data input | I |
| 18 | G5 | Green data input | I |
| 19 | G6 | Green data input | I |
| 20 | G7 | Green data input | I |
| 21 | B0 | Blue data input | I |
| 22 | B1 | Blue data input | I |
| 23 | B2 | Blue data input | I |
| 24 | B3 | Blue data input | I |
| 25 | B4 | Blue data input | I |
| 26 | B5 | Blue data input | I |
| 27 | B6 | Blue data input | I |
| 28 | B7 | Blue data input | I |
| 29 | GND | Ground | P |
| 30 | PCLK | Clock signal. Latching data at the rising edge | I |
| 31 | DISP | Standby setting for testing, should be connected to VDDIO in normal operation mode. If connected to GND, the IC is in standby mode. | I |
| 32 | HSYNC | Horizontal sync input. Negative polarity. | I |
| 33 | VSYNC | Vertical Sync input. Negative polarity. | I |
| 34 | DE | Data input enable. Active high to enable the data input bus under DE mode. | I |
| 35 | NC | Open | |
| 36 | GND | Ground | P |
| 37 | XR(NC) | Touch panel right glass terminal | |
| 38 | YD(NC) | Touch panel bottom film terminal | |
| 39 | XL(NC) | Touch panel left glass terminal | |
| 40 | YU(NC) | Touch panel top film terminal | |

I: Input, O: Output, P: Power



4. LCD Optical Characteristics

4.1 Optical Specifications

| Item | Symbol | Condition | Min | Typ. | Max | Unit | Note | |
|------------------------------|---------|---------------------------------------|-------|-------|-------|--------|--------|--------|
| Contrast Ratio | CR | $\theta=0$ Normal viewing angle | -- | 1000 | -- | % | (2) | |
| Response Time | Rising | | TR+TF | -- | 35 | 40 | ms | (4) |
| | Falling | | | | | | | |
| Color Gamut | S | | | 70 | -- | % | (5) | |
| Color Filter Chromaticity | White | | W_x | 0.267 | 0.307 | 0.347 | | (5)(6) |
| | | | W_y | 0.306 | 0.346 | 0.386 | | |
| | Red | | R_x | 0.599 | 0.639 | 0.679 | | |
| | | | R_y | 0.298 | 0.338 | 0.378 | | |
| | Green | | G_x | 0.287 | 0.327 | 0.367 | | |
| | | | G_y | 0.548 | 0.578 | 0.618 | | |
| | Blue | B_x | 0.103 | 0.143 | 0.183 | | | |
| | | B_y | 0.027 | 0.067 | 0.107 | | | |
| Viewing Angle | Hor. | Θ_L | -- | 85 | -- | degree | (1)(6) | |
| | | Θ_R | -- | 85 | -- | | | |
| | Ver. | Θ_T | -- | 85 | -- | | | |
| | | Θ_B | -- | 85 | -- | | | |
| Option View Direction | FREE | | | | | | (1) | |

Optical Specification Reference Notes:

(1) Definition of Viewing Angle: The viewing angle is the angle at which the contrast ratio is greater than 10. The viewing angles are determined for the horizontal or 3,9 o'clock direction and the vertical or 6,12 o'clock direction with respect to the optical axis which is normal to the LCD surface.

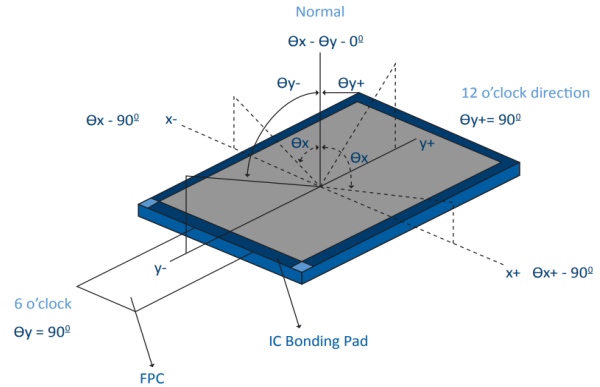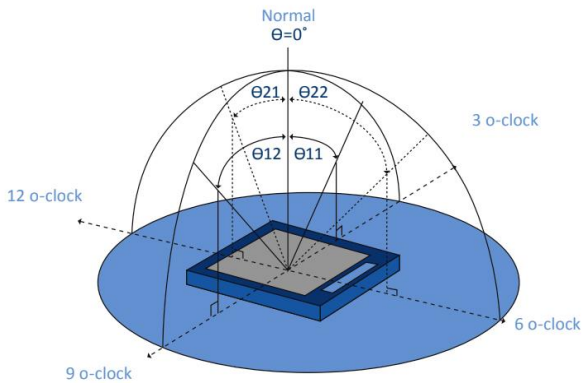


(2) Definition of Contrast Ratio (Cr): measured at the center point of panel. The contrast ratio (Cr) measured on a module, is the ratio between the luminance (Lw) in a full white area (R=G=B=1) and the luminance (Ld) in a dark area (R=G=B=0).

$$Cr = \frac{Lw}{Ld}$$


(3) Definition of transmittance (T%): The transmittance of the panel including the polarizers is measured with electrical driving. The equation for transmittance Tr is:

$$Tr = \frac{It}{Io} \times 100\%$$

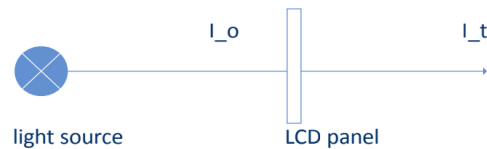

Io = the brightness of the light source.
 It = the brightness after panel transmission

(4) Definition of Response Time (Tr, Tf): The rise time 'Tr' is defined as the time for luminance to change from 90% to 10% as a result of a change of the electrical condition. The fall time 'Tf' is defined as the time for luminance to change from 10% to 90% as a result of a change of the electrical condition.

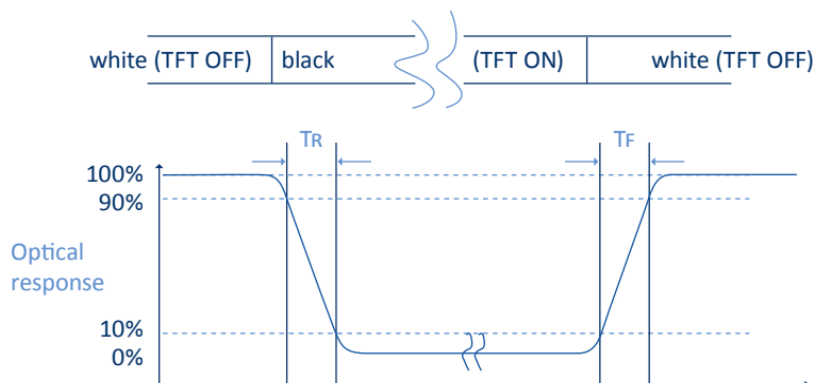

(5) Definition of Color Gamut:

Measuring machine CFT-01. NTSC's Primaries: R(x,y,Y), G(x,y,Y), B(x,y,Y). FPM520 of Westar Display Technologies, INC., which utilized SR-3 for Chromaticity and BM-5A for other optical characteristics. The color chromaticity shall be calculated from the spectral data measured with all pixels first in red, green, blue and white. Measurements shall be made at the center of the panel.




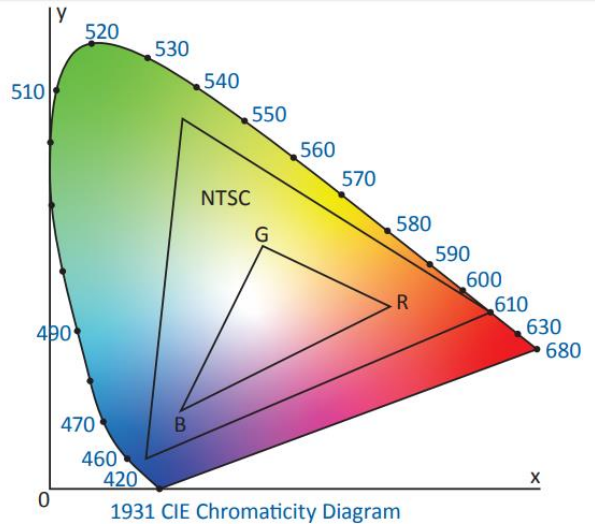


Fig. 1931 CIE chromacity diagram

$$\text{Color gamut: } S = \frac{\text{Area of RGB triangle}}{\text{Area of NTSC triangle}} \times 100\%$$

(6) Definition of Optical Measurement Setup:

The LCD module should be stabilized at a given temperature for 20 minutes to avoid abrupt temperature change during measuring. In order to stabilize the luminance, the measurement should be executed after lighting backlight for 20 minutes.

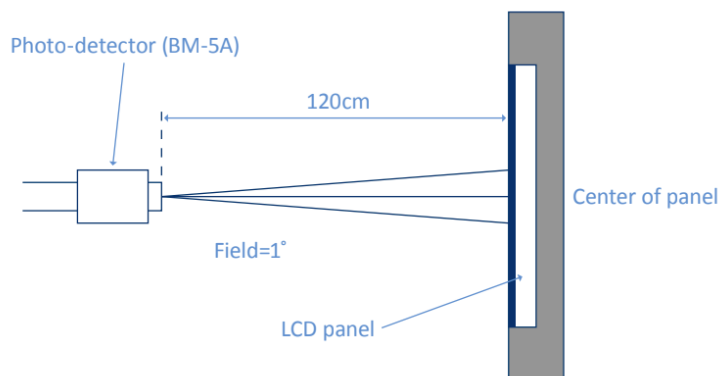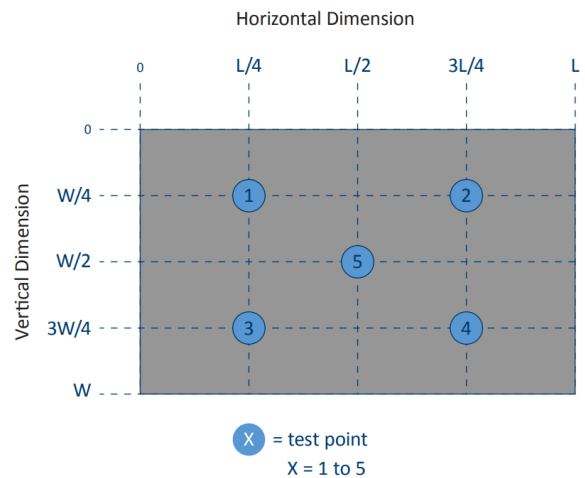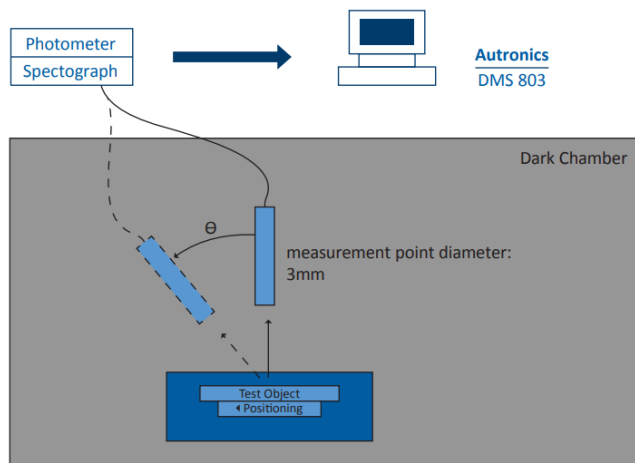

5. TFT Electrical Characteristics

5.1 Absolute Maximum Rating (Ta=25 °C, VSS=0V)

| Characteristics | Symbol | Min | Max | Unit |
|------------------------|--------|------|-----|------|
| Digital Supply Voltage | VCI | -0.3 | 4.0 | V |
| Operating Temperature | TOP | -10 | +60 | °C |
| Storage Temperature | TST | -30 | +80 | °C |

NOTE: If the absolute maximum rating of the above parameters is exceeded, even momentarily, the quality of the product may be degraded. Absolute maximum ratings specify the values which the product may be physically damaged if exceeded. Be sure to use the product within the range of the absolute maximum ratings.

5.2 DC Electrical Characteristics

| Characteristics | Symbol | Min | Typ. | Max | Unit | Note |
|----------------------------|--------|--------|------|--------|------|------|
| Digital Supply Voltage | VDD | 3.0 | 3.3 | 3.6 | V | |
| DC Booster Circuit Current | IDD | -- | 120 | -- | mA | |
| Level Input Voltage | VIH | 0.7VDD | -- | VDD | V | |
| | VIL | GND | -- | 0.3VDD | V | |
| Level Output Voltage | VOH | 0.8VDD | -- | VDD | V | |
| | VOL | GND | -- | 0.2VDD | V | |


5.3 LED Backlight Characteristics

The backlight system is edge lighting type with 27 chips

| Item | Symbol | Min | Typ. | Max | Unit | Note |
|-----------------|-----------------|-------|------|-----|-------------------|-----------|
| Forward Current | I _F | 170 | 180 | -- | mA | |
| Forward Voltage | V _F | -- | 9.9 | -- | V | |
| LCM Luminance | LV | 350 | 400 | -- | cd/m ² | Note 3 |
| LED lifetime | Hr | 50000 | -- | -- | hour | Note1 & 2 |
| Uniformity | AV _g | 80 | -- | -- | % | Note 3 |


Note 1: LED lifetime (Hr) can be defined as the time in which it continues to operate under the condition: T_a=25 ±3 °C, typical IL value indicated in the above table until the brightness becomes less than 50%.

Note 2: The “LED lifetime” is defined as the module brightness decrease to 50% original brightness at T_a=25°C and IL = 180mA. The LED lifetime could be decreased if operating IL is larger than 180mA. The constant current driving method is suggested.

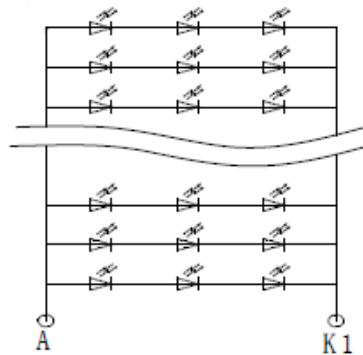

Backlight LED Circuit (27 LEDs)

Note 3: Luminance Uniformity of these 9 points is defined as below:

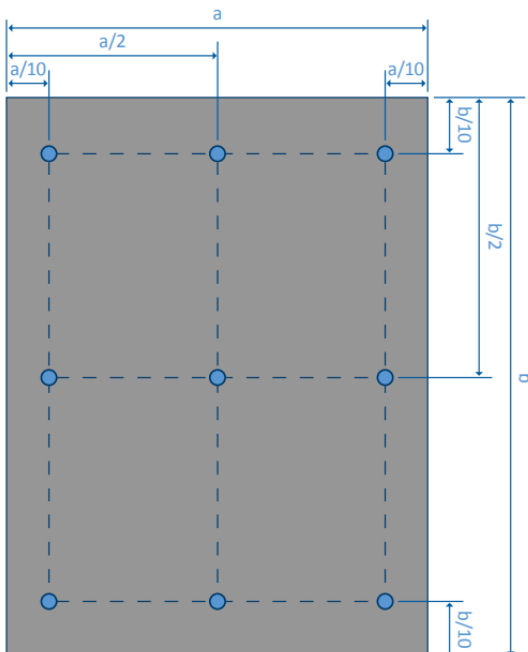


$$\text{Luminance} = \frac{\text{(Total Luminance of 9 points)}}{9}$$


$$\text{Uniformity} = \frac{\text{minimum luminance in 9 points(1-9)}}{\text{maximum luminance in 9 points(1-9)}}$$

6. TFT AC Characteristics

6.1 Display ON Sequence

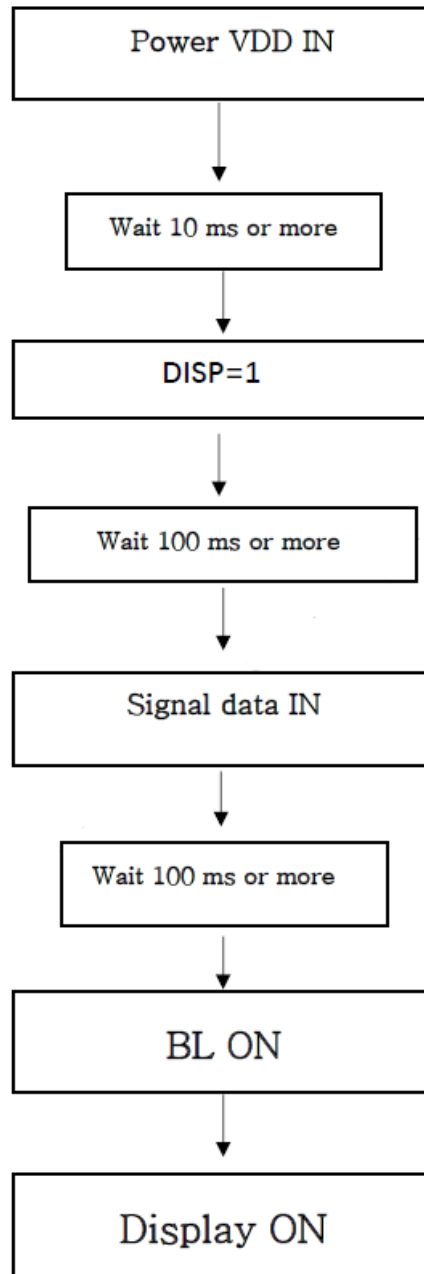


6.2 Display OFF Sequence

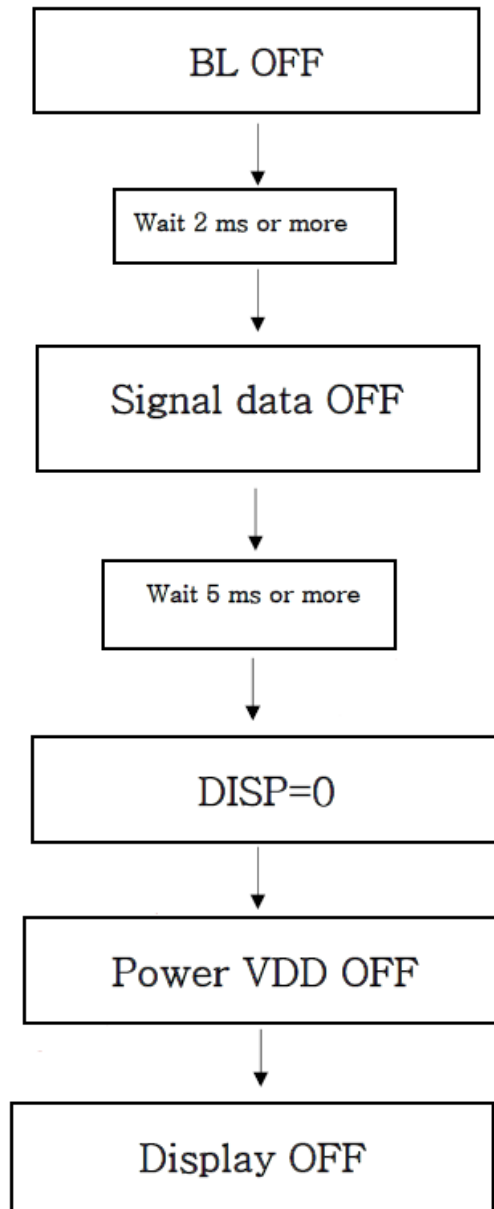


7. AC Timing Characteristics

7.1 Input Signal Timing

Vertical Timing

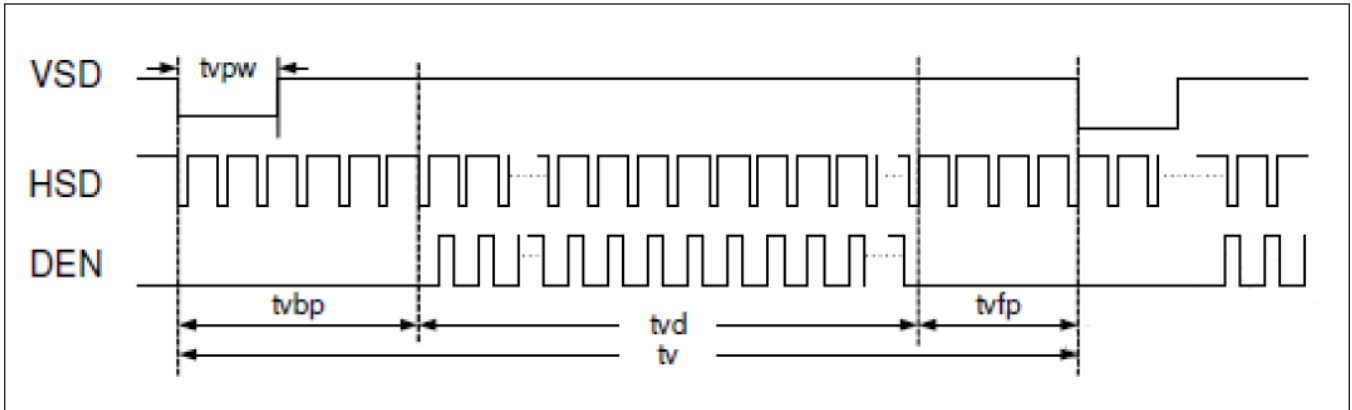


Horizontal Timing

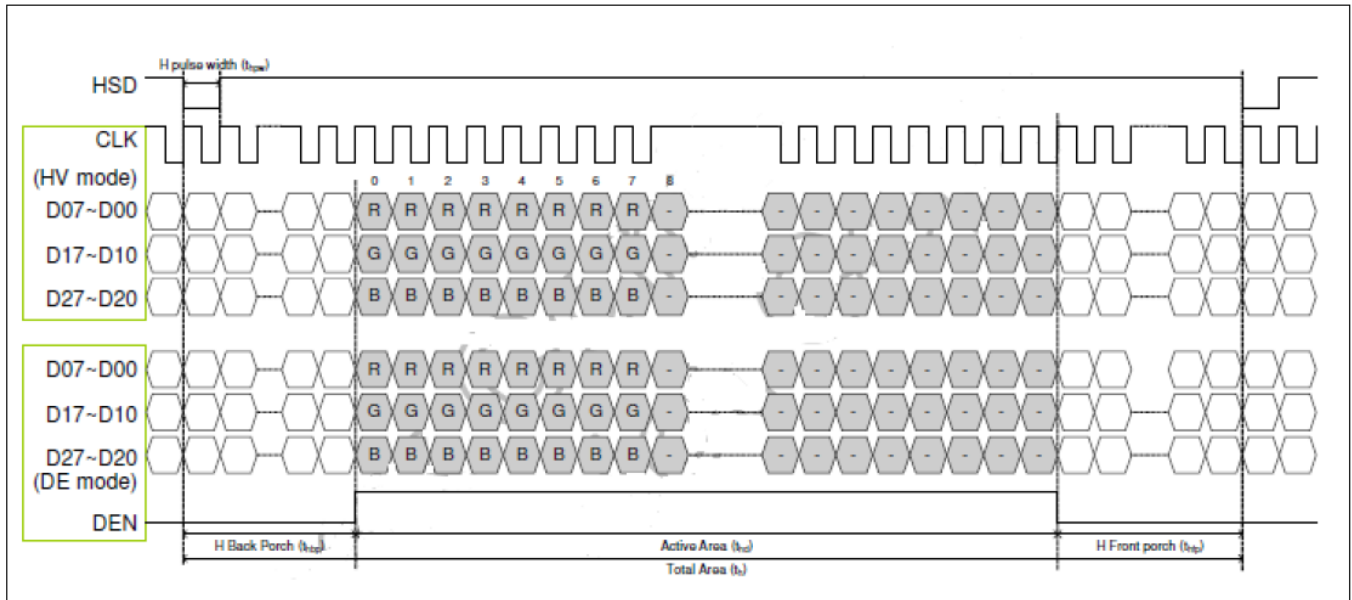

7.2 Parallel RGB Interface Timing Characteristics

(VDD=VDD_LVDS=3.0~3.6V, GND=GND_LVDS=0V, TA=-20-85°C)

| Parameter | Symbols | Min | Typ. | Max | Units | Conditions |
|---------------------|---------|------|------|-----|-------|----------------------------------|
| CLK cycle time | tCPH | 16.7 | - | - | ns | |
| CLK pulse high duty | tCWH | 40 | 50 | 60 | % | |
| CLK pulse low duty | tCWL | 40 | 50 | 60 | % | |
| VS setup time | tVST | 4 | - | - | ns | |
| VS hold time | tVHD | 2 | - | - | ns | |
| HS setup time | tHST | 4 | - | - | ns | |
| HS hold time | tHHD | 2 | - | - | ns | |
| Data setup time | tDSH | 4 | - | - | ns | D0[7:0], D1[7:0], D2[7:0] to CLK |
| Data hold time | tDHD | 2 | - | - | ns | D0[7:0], D1[7:0], D2[7:0] to CLK |
| DE setup time | tESU | 4 | - | - | ns | |
| DE hold time | tEHD | 2 | - | - | ns | |

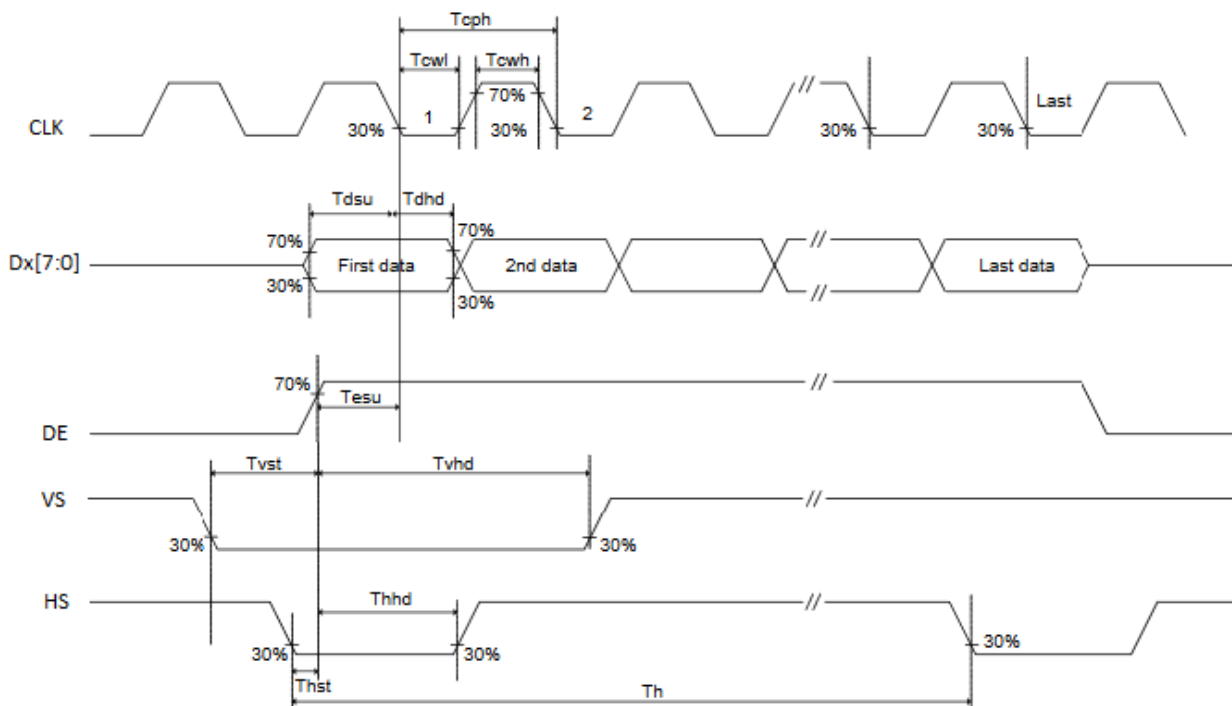

| Parameter | Symbols | Min | Typ. | Max | Units | Notes |
|--------------------------|---------|------|------|-----------|-------|-------------|
| CLK frequency | tCLK | 25.9 | 27.6 | 48.7 | Mhz | |
| Horizontal blanking time | tHBT | 90 | 110 | 304 | tCLK | tHBP + tHFP |
| Horizontal back porch | tHBP | 5 | 5 | 304- tHFP | tCLK | |
| Horizontal display area | tHD | 800 | 800 | 800 | tCLK | |
| Horizontal front porch | tHFP | 85 | 105 | 299 | tCLK | |
| Horizontal period | tH | 890 | 910 | 1104 | tCLK | |
| Horizontal pulse width | tHPW | 1 | 1 | 256 | tCLK | |
| Vertical blanking time | tVBT | 5 | 26 | 255 | tH | tVBP + tVFP |
| Vertical back porch | tVBP | 2 | 2 | 255- tVFP | tH | |
| Vertical display area | tVD | 480 | 480 | 480 | tH | |
| Vertical front porch | tVFP | 3 | 24 | 253 | tH | |
| Vertical period | tV | 485 | 506 | 735 | tH | |
| Vertical pulse width | tVPW | 1 | 1 | 128 | tH | |

8. Cautions and Handling Precautions

8.1 Handling and Operating the Module

1. When the module is assembled, it should be attached to the system firmly. Do not warp or twist the module during assembly work.
2. Protect the module from physical shock or any force. In addition to damage, this may cause improper operation or damage to the module and back-light unit.
3. Note that polarizer is very fragile and could be easily damaged. Do not press or scratch the surface.
4. Do not allow drops of water or chemicals to remain on the display surface. If you have the droplets for a long time, staining and discoloration may occur.
5. If the surface of the polarizer is dirty, clean it using some absorbent cotton or soft cloth.
6. The desirable cleaners are water, IPA (Isopropyl Alcohol) or Hexane. Do not use ketene type materials (ex. Acetone), Ethyl alcohol, Toluene, Ethyl acid or Methyl chloride. It might permanent damage to the polarizer due to chemical reaction.
7. If the liquid crystal material leaks from the panel, it should be kept away from the eyes or mouth. In case of contact with hands, legs, or clothes, it must be washed away thoroughly with soap.
8. Protect the module from static; it may cause damage to the CMOS ICs.
9. Use fingerstalls with soft gloves in order to keep display clean during the incoming inspection and assembly process.
10. Do not disassemble the module.
11. Protection film for polarizer on the module shall be slowly peeled off just before use so that the electrostatic charge can be minimized.
12. Pins of I/F connector shall not be touched directly with bare hands.
13. Do not connect, disconnect the module in the "Power ON" condition.
14. Power supply should always be turned on/off by the item Power On Sequence & Power Off Sequence

8.2 Storage and Transportation

1. Do not leave the panel in high temperature, and high humidity for a long time. It is highly recommended to store the module with temperature from 0 to 35 °C and relative humidity of less than 70%
2. Do not store the TFT-LCD module in direct sunlight.
3. The module shall be stored in a dark place. When storing the modules for a long time, be sure to adopt effective measures for protecting the modules from strong ultraviolet radiation, sunlight, or fluorescent light.
4. It is recommended that the modules should be stored under a condition where no condensation is allowed. Formation of dewdrops may cause an abnormal operation or a failure of the module. In particular, the greatest possible care should be taken to prevent any module from being operated where condensation has occurred inside.
5. This panel has its circuitry FPC on the bottom side and should be handled carefully in order not to be stressed.