



Views from "X"

6-Pole
(5+1)




8-Pole




Cable Diameter

7 - 12 mm

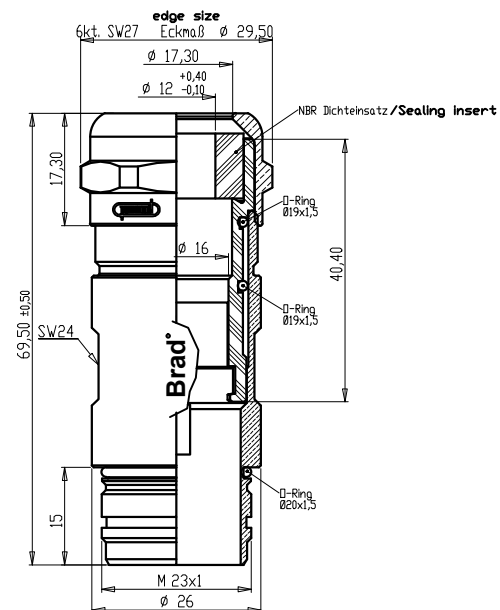

Cable Diameter

11 - 17 mm

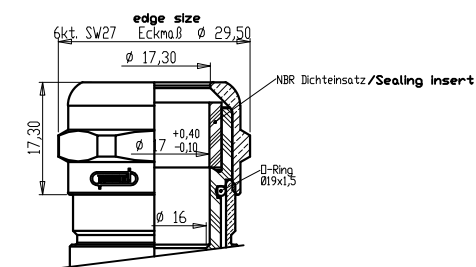

Cable Diameter		Crimp Contacts	Without Contacts
6 Pole (5+PE)	7 - 12mm	KAP6S06-105	KAP6S06-005
		1202330017	1202330019
	11 - 17mm	KAP6S06-109	KAP6S06-009
		1202330018	1202330020
	Crimp range*	0,75-2,5mm ²	
8 Pole	7 - 12mm	KAP8S06-115	KAP8S06-005
		1202330021	1202330023
	11 - 17mm	KAP8S06-119	KAP8S06-009
		1202330022	1202330024
	Crimp range*	0,25-1,0mm ² /0,75-2,5mm ²	

*Crimp range only applies to "Crimp Contacts" version

Notes:

Tolerances (unless specified): DIN ISO 2768 m

DESCRIPTION EC NO: IPG2015-0907 DRWN: BBRAUCH 2014/11/18 CHKD: ZISMAYIL APPR: CBURGER	QUALITY SYMBOLS	GENERAL TOLERANCES (UNLESS SPECIFIED)	DIMENSION STYLE	SCALE	DESIGN UNITS	THIRD ANGLE PROJECTION	
	▽ = 0	mm INCH	MM	---	METRIC	FA M23 XP MA STR	
	▽ = 0	4 PLACES ± --- ± ---	DRAWN BY DATE	FA M23 XP MA STR			
		3 PLACES ± --- ± ---	BB 2008/11/19	---			
		2 PLACES ± 0.05 ± ---	CHECKED BY DATE	---			
	1 PLACE ± 0.1 ± ---	JKO 2008/12/09	---				
	0 PLACE ± --- ± ---	APPROVED BY DATE	---				
	ANGULAR ± --- °	MATERIAL NO.	DOCUMENT NO.		SD-120233-003		
	DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS	see table	SIZE		1 OF 1		
2	REV	A3		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION			

