
ר בר	н -	m	1	D	0	σ		
					LAY	OUT SHOWN AS EXAMPLE		
	Keying Shown a	as example						
CHARACTERISTICS	F	Connector dimension Dim Nominal	]					
-Standard : Based on MIL-DTL-38999 Series III         -Shell Material       : Composite         -Shell Plating       : Nickel         -Insulator       : Thermoplastic         -Contacts       : Copper Alloy         -Seals & Grommet       : Silicon Elastomer         -Contact Plating       : Gold over copper Alloy 0.8μm minimum		ØS 29.4 Max Z' 31.5 Max VV THREAD M18x1-6g			due to a use the Specifications	not be liable for any non-confo of the Products which does no issued by either of the Parties onal recommendation, technic Country Ju FR	ot comply with s or by a third party	
-Durability : 500 Mating cycles -Delivered with Souriau contacts and Accessories					PN: 8D513M04JA			
-Temperature Range65°C to +200°C				A 18-	10-2016 First Release			
-Salt Spray : 2000 hours				ISS I Designed By:	DATE Latest modificatio	n - by	CUSTOMER DRAWING	MOD N°
				тіт	LE	Composite Plu	g 8D series	
BASIC SERIES: 8D 5 - 13 M SHELL TYPE : Plug with RFI Shielding	04 J A			SCALE		General linear Tolerances: ±	NPRDS / PROJECT <b>859</b>	
CONTACT TYPE : Standard Crimp Contact SHELL SIZE : 13	: Standard Crimp Contact ORIENTATION : A			SOURIAU         This document is the pr SOURIAU           It must not be reproduction         it must not be reproduction			uced or	
PLATING : M = Nickel		CONTACT LAY	OUT : 13-04	format A3		SOURIAU DRG N 8D513M04JA-0		SHEET
				_ <b></b>		ΧΠΣΙΚΙΛΙΟΔΙΔ-(		1 1/2

-	Ŧ	۵	н <b>г</b>	m	D	0
		Contact Layout				
4	×	$ \begin{array}{c}                                     $				
	Conta position A B C D Shell Arrangement N size no. c 13 -4	+.000 (0.00)         +.150 (0.81)           +.146 (3.71)         +.035 (0.89)           +.000 (0.00)        083 (2.11)          146 (3.71)         +.035 (0.89)				
ယ						
	L					
						SOURIAU shall not be liable for an due to a use of the Products wl the Specifications issued by either o (professional recommenda
N						Count FR
						PN: 8D513I
					A 18-10-20 ISS DATE	116 First Release Latest modification - by
					Designed By:	Date:
					TITLE	Compo
_					SCALE NA	General linear Tolerances: ±
					SOURIA	U WWW.SOURIAU.C
					FORMAT A3	SOURIAU 8D513N
	Н	G	F	E	D	

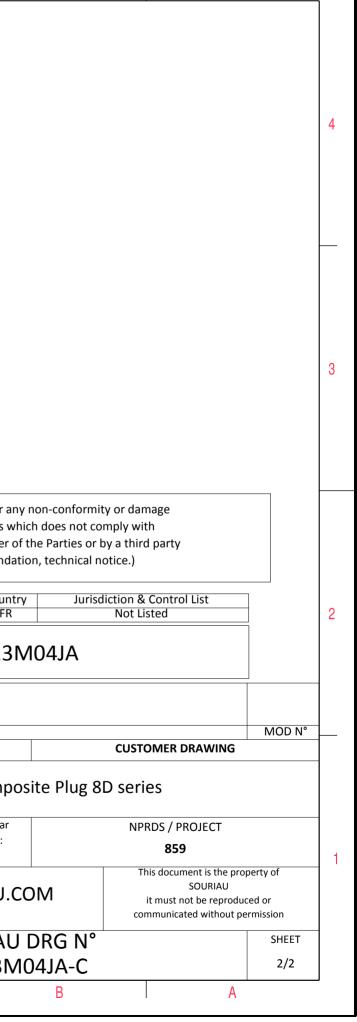

 $\triangleright$ 

σ