


## SPECIFICATION

Part No. : **FXR.08.52.0075X.A.dg**

Product Name : Rectangular Flexible Near-Field  
Communications Ferrite Antenna with 75mm  
Twisted Pair 28AWG Cable and ACH(F)  
connector

Features : 13.56MHz RFID / NFC Antenna  
Layered with Ferrite Flux Director  
Low Profile Embedded Antenna  
Dimensions: 53.34 mm x 37.3 mm  
Thickness: 0.30 mm  
Peel and stick Nitto UTD-30 adhesive on back  
75mm Twisted Pair 28AWG Cable with Teflon and ACH(F)  
Connector  
Customized solutions available  
**RoHS Compliant**

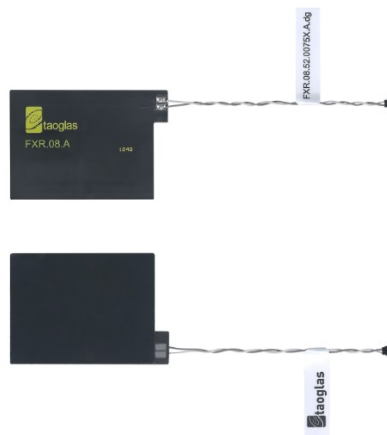

## 1. Introduction

The FXR.08.52.0075X.A.dg is an NFC Ferrite antenna with 75mm twisted pair 28AWG cable and JST connector. It works with specific NFC chips which need to connect via JST ACH connector.

NFC antennas can be applied in areas not traditionally available to other types of antennas. A common example is the ability to apply NFC antennas to batteries or other conductive surfaces. To enable this usage, however, a ferrite flux director layer is required. This ferrite layer acts to steer the magnetic flux away from the metal or other conductor, where it would otherwise result in loss or complete failure to communicate. Taoglas NFC antennas can therefore be customized with flux director layers to enable this flexibility in usage. The coil inductance noted below can help estimate a capacitance value for creating resonance at 13.56MHz.

### Typical applications

- Mobile devices
- Electronic wallets
- Health care ID scanners
- Payment readers
- Office ID
- Access control
- Internet Of Things

Customized antennas for specific applications, shape, and impedance match can also be provided for an NRE and subject to MOQ. Contact your regional Taoglas sales office for more information and support on our NFC antenna range.


## 2. Specification

<b>Flexible PCB Near-Field Communications Antenna</b>		
Frequency	13.56	MHz
Inductance @ 13.56 MHz	4.5	μH
<b>Flexible NFC Mechanical</b>		
Antenna Dimensions	Dimensions: 53.34 mm x 37.3 mm Thickness: 0.15 mm	
Cable Length	75 mm	
Connector Type	ACH(F)	
Adhesive	3M 467	
Weight	3g	
<b>Ferrite Sheet Mechanical</b>		
PET	Dimension: 53.34*37.3 mm Thickness: 0.02 mm	
Ferrite Sheet	Dimension: 53.34*37.3 mm Thickness: 0.10 mm	
Adhesive Type	Nitto UTD-30 (W) Thickness: 0.03 mm	
<b>Environmental</b>		
Operation Temperature	-40°C to 85°C	
Storage Temperature	-40°C to 85°C	
Humidity	Non-condensing 65°C 95% RH	

### 3. Antenna Application

#### 3.1. Test setup

A test fixture is used to measure the maximum interrogation distance. The FXR.08.52.0075X.A.dg antenna is connected to a NFC evaluation board and then placed on the fixed part of the fixture.

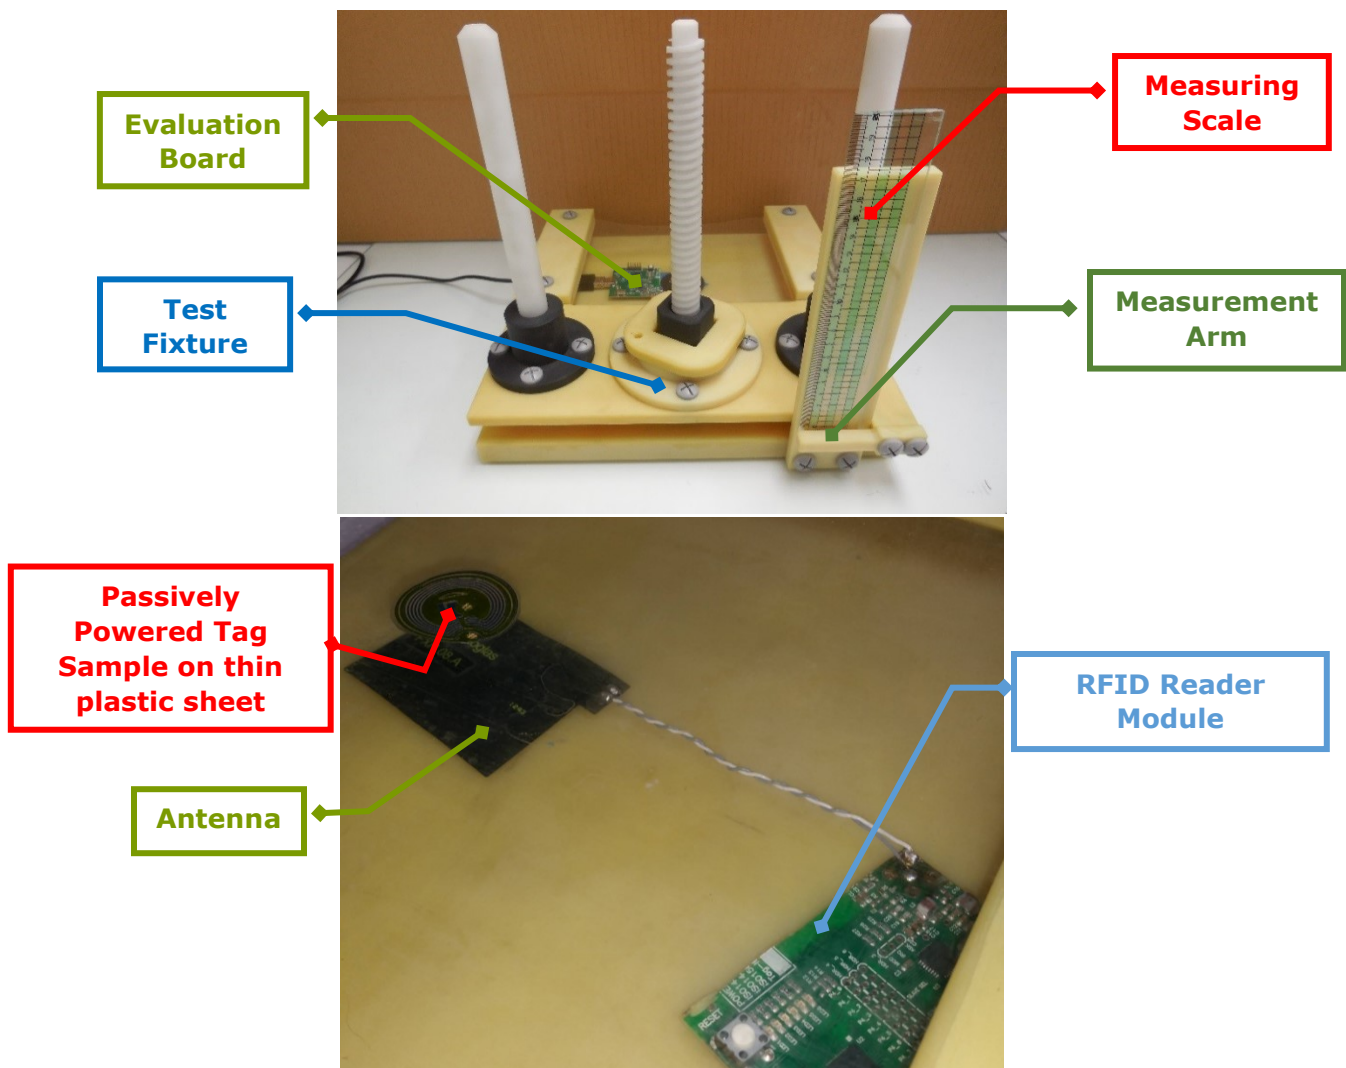

The test sample is placed on a thin sheet of plastic connected to the movable part of the fixture. Then the distance is carefully adjusted until the reader can no longer read the sample, thus the maximum interrogation distance is displayed in the ruler.




### 3.3. Matching

The interrogation distances presented here were taken with the antenna connected directly to the evaluation boards with the default matching circuit. This is not necessarily the optimal matching circuit that could be designed for a particular antenna. We kept the default matching of each evaluation board to minimize the number of variables in testing and keep integration as simple as possible.

As with any matching network the exact circuit and values for an optimal network depend on the combination of antenna, NFC circuit, any intervening transmission line and the environment presented to the antenna. These factors are specific to the particular end product.

As a starting point, to achieve the read range results presented here, use the matching network detailed in the schematic of the evaluation board for your particular NFC chip and keep the antenna free of any obstruction. Once you can demonstrate successful reads you can then optimize performance as desired.

If the matching network is required, you should implement the following topology:

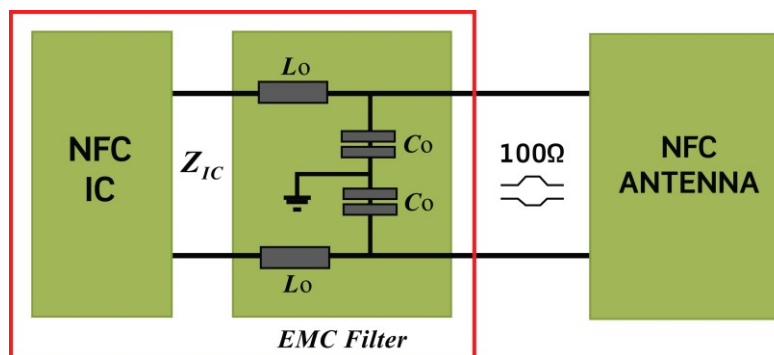

The matching circuit should be designed to match the IC impedance  $Z_{IC}$  to  $100\Omega$  and then connect the antenna through a  $100\Omega$  differential pair.

### 3.4. Test Results

A total of 8 sample devices were used to measure the interrogation distances in two scenarios, over plastic and over metal, using the Texas Instruments TRF7970AEVM evaluation board. The results are:


- Over plastic:

Device	Dimensions (mm.)	Interrogation Distance (mm.)
Topaz512 (Type 1)	43 x 43	12
NTAG203 (Type 2)	Φ 42	14
Tag-it HFI Plus RI-I11-112	45 x 45	21
Tag-it HFI Plus RI-I02-112	76 x 48	23
Tag-it HFI Plus RI-I03-112	38 x 22.5	10
Tag-it HFI Plus RI-I16-112	Φ 24.2	12
Button type	Φ 22	10
Tag-it HFI Plus RI-I17-112	Φ 32.5	15

- Over metal:

Device	Dimensions (mm.)	Interrogation Distance (mm.)
Topaz512 (Type 1)	43 x 43	7
NTAG203 (Type 2)	Φ 42	9
Tag-it HFI Plus RI-I11-112	45 x 45	14
Tag-it HFI Plus RI-I02-112	76 x 48	16
Tag-it HFI Plus RI-I03-112	38 x 22.5	7
Tag-it HFI Plus RI-I16-112	Φ 24.2	9
Button type	Φ 22	8
Tag-it HFI Plus RI-I17-112	Φ 32.5	11

## 4. Mechanical Drawing (Unit: mm)

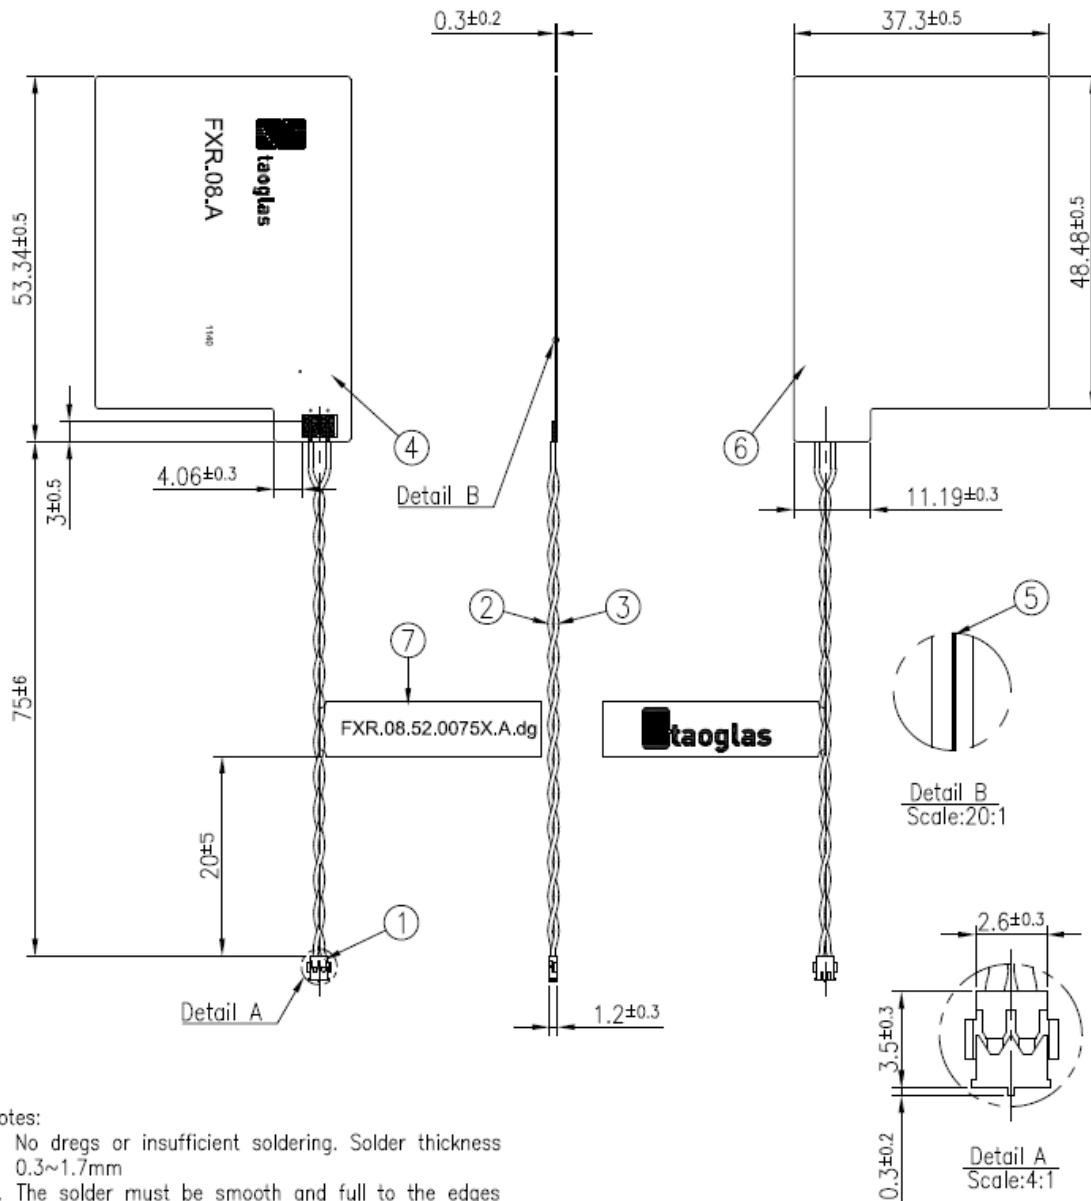

**Notes:**

1. No dregs or insufficient soldering. Solder thickness 0.3~1.7mm
2. The solder must be smooth and full to the edges of the pad, and must not extend outside of the pad area.
3. The connector position has special orientation to the PCB as per drawing.
4. All Material Must Be RoHS Compliant.
5. Open/short QC, VSWR required.
6. Soldered area (Tin Plated).
7. \* " Critical Dimensions

Name	P/N	Material	Finish	QTY	
1	ACH Connector (F)	208115C000000A	Engineering Plastics	Black	1
2	PVDF Cable (28AWG)	304515C000000A	PVDF	Black	1
3	PVDF Cable (28AWG)	304515C010000A	PVDF	Red	1
4	FXR.08.A.FPCB	100111L010011A	FPCB 0.15t	Black	1
5	Double-Sided Adhesive	100111L010011A	3M 467	Clear	1
6	FXR.08.B Flux Director	001015C060000A	Ferite	Natural	1
7	FXR.08.52.0075X.A.dg Label	001015D090051A	PET	White	1




## 5. Packaging


### FXR.08.52.0075X.A.dg

#### Packaging Specifications


100pcs FXR.08.52.0075X.A.dg per PE Bag  
 Bag Dimensions - 187 x 137mm  
 Weight - 200g




1000pcs FXR.08.52.0075X.A.dg per PE Large Bag  
 Bag Dimensions - 470 x 380mm  
 Weight - 2Kg



Carton Qty - 5,000 FXR.08.52.0075X.A.dg  
 Carton - 330 x 260 x 240mm  
 Weight - 10.5Kg

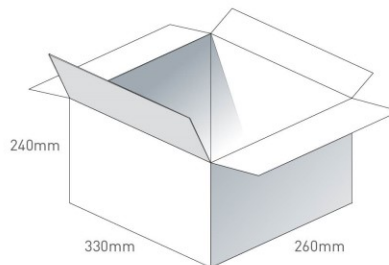

Pallet Dimensions 1200 x 1000 x 1350mm  
 60 Cartons per Pallet  
 12 Cartons per layer  
 5 Layers

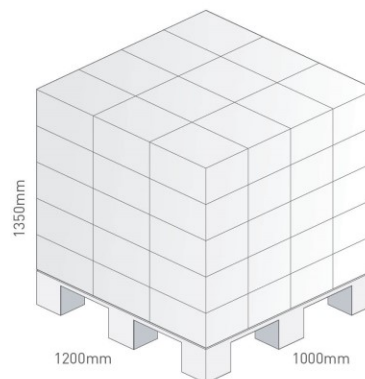

Taoglas makes no warranties based on the accuracy or completeness of the contents of this document and reserves the right to make changes to specifications and product descriptions at any time without notice. Taoglas reserves all rights to this document and the information contained herein.

Reproduction, use or disclosure to third parties without express permission is strictly prohibited.

Copyright © Taoglas Ltd.