
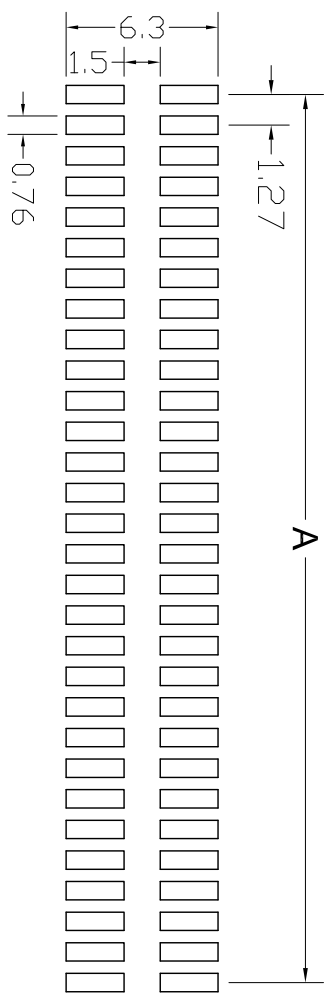
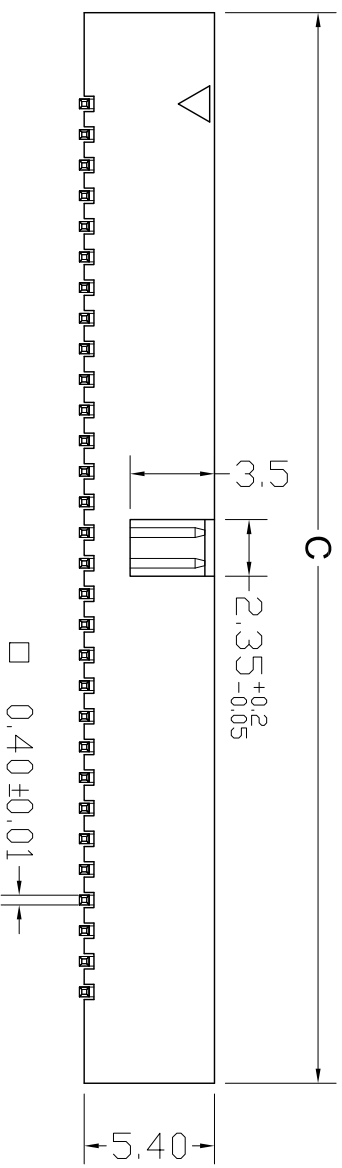


RoHS

| REV. | DESCRIPTION | DATE |
|------|-------------|------------|
| A | RELEASE | 2012.11.12 |
| | | |
| | | |

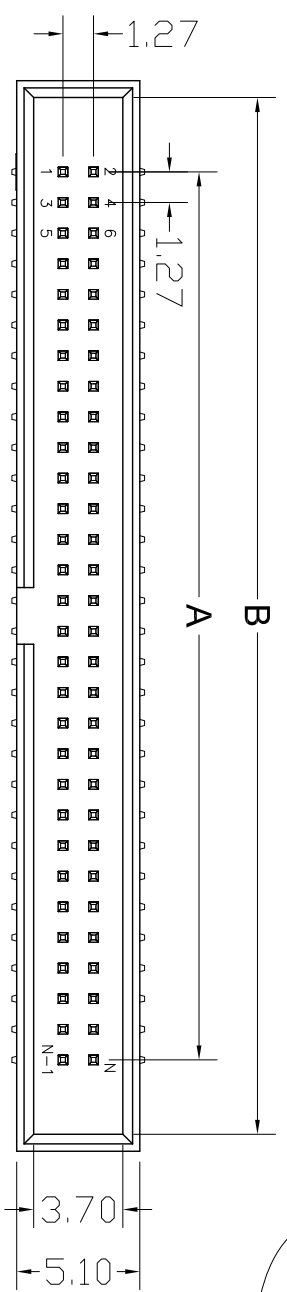

NOTES:
 Insulator Material: Nylon-6T, UL 94V-0
 Contact Plating: TIN, 80-100µ"
 Contact Material: Brass
 Current Rating : 1A AC,DC
 Contact Resistance: 20MΩ Max.
 Dielectric Withstanding: AC 500V
 Insulator Resistance: 1000MΩ Min.
 Operating Temp.: -40° C~+105° C

| NUMBER OF POSITIONS | DIMENSIONS | | |
|---------------------|------------|-------|-------|
| | A | B | C |
| 10 | 5.08 | 11.25 | 12.65 |
| 14 | 7.62 | 13.79 | 15.19 |
| 16 | 8.89 | 15.06 | 16.46 |
| 20 | 11.43 | 17.60 | 19.00 |
| 26 | 15.24 | 21.41 | 22.81 |
| 30 | 17.78 | 23.95 | 25.35 |
| 34 | 20.32 | 26.49 | 27.89 |
| 40 | 24.13 | 30.30 | 31.70 |
| 50 | 30.48 | 36.65 | 38.05 |
| 60 | 36.83 | 43.00 | 44.40 |

| UNLESS TOLERANCE | | DRAW BY | |
|------------------|-------------|-----------|----------|
| GENERAL | ANGLE | DESIGN BY | CHECK BY |
| X. ± 0.30 | X.° ± 3.0° | | |
| .X ± 0.25 | .XX ± 2.0° | | |
| .XX ± 0.20 | .XX° ± 1.0° | | |
| .XXX ± 0.10 | .XXX ± 0.5° | | |
| | | SCALE | SHEET |
| | | 1:1 | 1/1 |
| | | MM | UNIT |

CnC Tech,LLC

Port NO.: 3220-XX-0300-99

Draw NO.: REV: A