


|--|

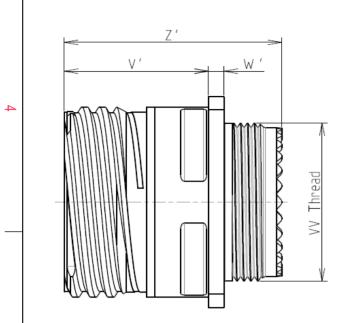

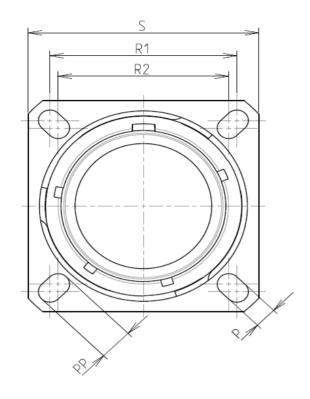



LAYOUT SHOWN AS

Keying Shown as example

CHARACTERISTICS

BASIC SERIES:

SHELL SIZE : 13

Н

SHELL TYPE : Square Flange Receptacle

CONTACT TYPE : Standard Crimp Contact

PLATING : J = Olive drab Cadmium

ယ

 \sim

-Standard : Based on MIL-DTL-38999 Series III

-Shell Material	: Composite			
-Shell Plating	: Olive drab Cadmium			
-Insulator	: Thermoplastic			
-Contacts	: Copper Alloy			
-Seals & Grommet	: Silicon Elastomer			
-Contact Plating	: Gold over copper Alloy 0.8µm minimum			
-Durability	: 500 Mating cycles			
-Delivered without Souriau contacts				
-Temperature Range	: -65℃ to +175℃			
-Salt Spray	: 2000 hours			

8D 0

G

13

J

03


Ρ


F

A L

Connector	dimension
Dim	Nominal
Р	3.25±0.2
PP	4.93±0.2
R1	23.01
R2	20.62
S	28.6±0.3
V'	19.5+1.4/-0
W'	2.1/3.65
Z'	32 Max
VV THREAD	M18x1-6g

Е



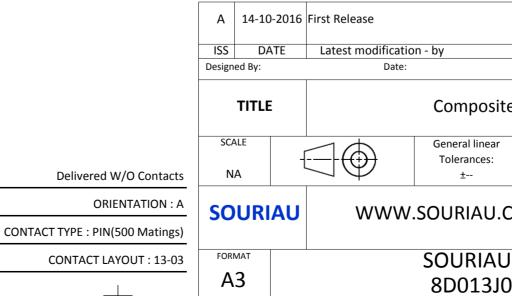

С

D

Ξ		A			
Re				4	
S EXAMPLE				3	
any non-conform which does not co of the Parties or idation, technical r	omply with by a third part	Σ γ			
Intry Juris R	diction & Cont Not Listed	rol List		2	
3J03PAL					
			MOD N°		
	CUSTOME	R DRAWING			
	e Receptacle 8D series				
ar		PROJECT 59		1	
I.COM	COM This document is the property of SOURIAU it must not be reproduced or communicated without permission				
U DRG N°	1		SHEET		
J03PAL-C B		Α	1/2	J	
_	•				

	工	G	н г	m	D	0	
		Contact Layout					Panel Cuto
4		03 () () () () () () () () () ()			τ. Σ	SQUARE FLANGE RECEPTACLE (TYPE 0) REAR MOUNTING	_
	Ctc A B C	13-03 X Y 2.39 1.47 0 -2.79 -2.39 1.47			Į.		
ယ						ØA ØA/ R1 ØT	A
						SOURIAU shall not be due to a use of the the Specifications issued (professional re	Products w d by either c
N						PN: {	Count FR 8D013.
					A 14-10-2 ISS DAT Designed By:	016 First Release E Latest modification - by Date:	
1					SCALE NA	Ger	omposit neral linear olerances: ±
					SOURIA	U WWW.SOL	
					FORMAT A3	80	URIAL D013J(
	Н	G	F F	E	D	C	

