

**FJH SERIES**

**(0.50 mm) .0197"**


# FLAT FLEXIBLE CABLE (FFC) JUMPER

**SPECIFICATIONS**

For complete specifications see [www.samtec.com/FJH](http://www.samtec.com/FJH)

- Conductor:** Tin Plated Copper
- Conductor Resistance:** 1000 Ω/km max
- Insulation Resistance:** 10 MΩ/km min (conductor-to-conductor)
- Dielectric Test:** 400 VAC during 1 minute (conductor-to-conductor)
- Temperature Rating:** -30 °C to +80 °C
- Voltage Rating:** 60 VAC
- RoHS Compliant:** Yes

**Mates with:**  
ZF5S

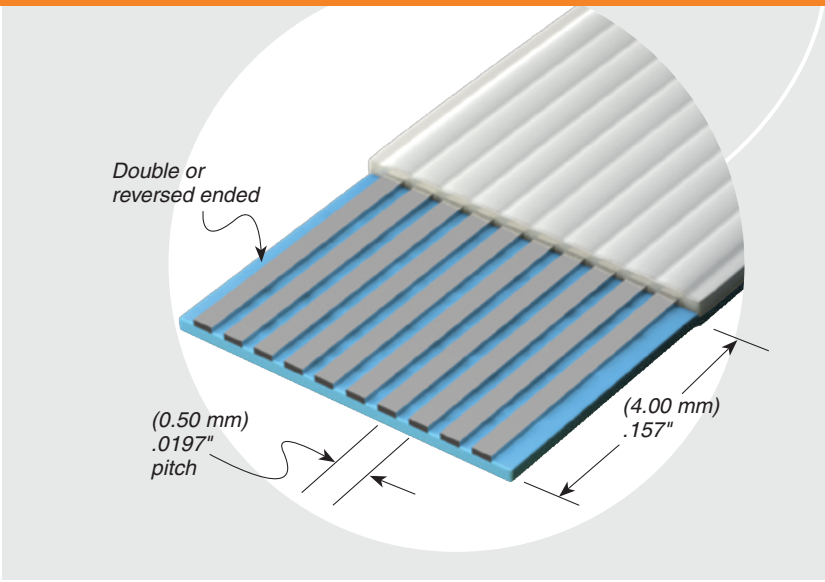

**ALSO AVAILABLE (MOQ Required)**

- Other Lengths

FJH	NO. OF POSITIONS	STYLE	LENGTH	STRIP LENGTH
	-10, -15, -20, -25, -30, -40, -43, -50	-D = Double End -R = Reversed End	Length in inches -03.00 = (76.2 mm) 3.00" -06.00 = (152.4 mm) 6.00" -12.00 = (304.8 mm) 12.00" -24.00 = (609.6 mm) 24.00" (Standard Lengths)	-4 = (4.00 mm) .157"

**-D Style** dimensions: (0.58) .023, (0.33) .013, LENGTH, (0.30) .012, (0.50) .0197, (4.00) .157, (0.10) .004, (5.26) .207, (0.30) .012

**-R Style** dimensions: (0.30) .012, (4.00) .157, (0.10) .004, (5.26) .207, (0.30) .012

**Notes:**  
Stiffener color will be blue or black at Samtec's discretion. Some sizes, styles and options are non-standard, non-returnable.

Due to technical progress, all designs, specifications and components are subject to change without notice.