


DESCRIPTION: 0.750 [19.05] CENTER DUAL PORT D-SUB – MALE OVER FEMALE

DIMENSIONS - INCHES [MM]

POS	9	15	25	37
A	1.213 [30.81]	1.543 [39.19]	2.078 [52.78]	2.724 [69.19]
B	0.984 [24.99]	1.312 [33.32]	1.850 [46.99]	2.500 [63.50]
C	0.494 [12.55]	0.494 [12.55]	0.494 [12.55]	0.494 [12.55]

25 PIN SHOWN

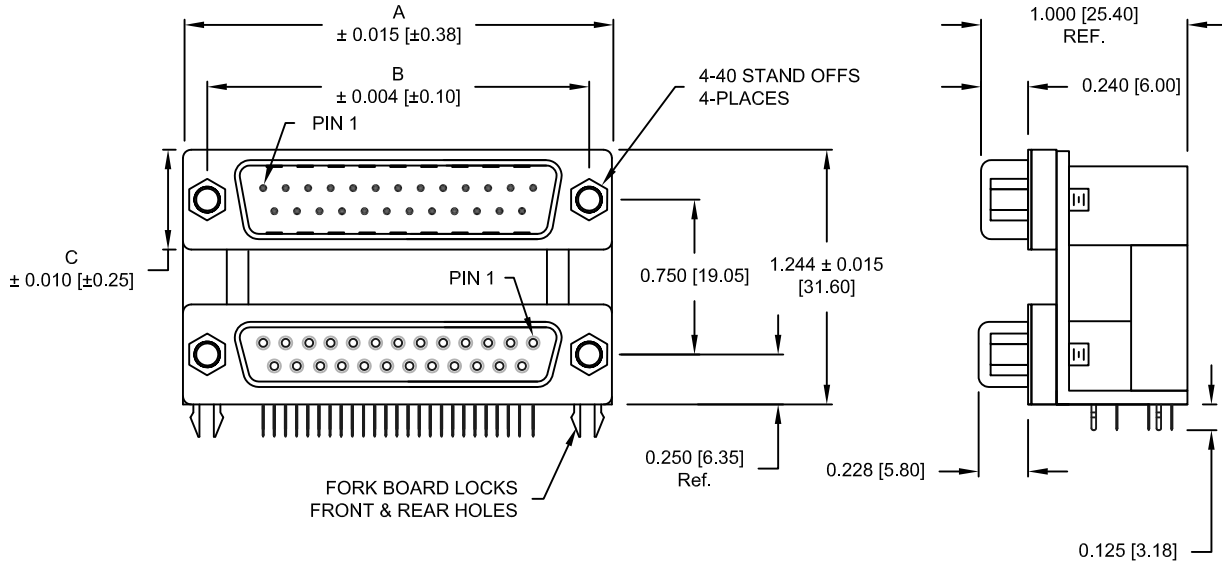

SPECIFICATION:

MATERIAL:


SHELL: STEEL, NICKEL PLATED
 INSULATOR: UL 94V-0 RATED, BLACK PA9T, 260° PROCESS TEMP.
 CONTACTS: BRASS
 CONTACT PLATING: SEE PART NUMBER KEY BELOW

ELECTRICAL:

INSULATOR RESISTANCE: 5,000 MΩ Min.
 CONTACT RESISTANCE: 25 mΩ Max.
 VOLTAGE: 250VAC (r.m.s.)
 CURRENT RATING: 5 AMPS
 OPERATING TEMPERATURE: -55° C TO 85° C

178-YYY-413R571

SERIES _____
 POSITIONS _____
 009
 015
 025
 037
 GENDER _____
 31 = FEMALE OVER MALE
 41 = MALE OVER FEMALE
 51 = FEMALE OVER FEMALE
 61 = MALE OVER MALE
 SHELL PLATING _____
 3 = NICKEL
 RoHS COMPLIANT (HIGH TEMP. PROCESS) _____
 HARDWARE OPTIONS _____
 57 = 4-40 STAND OFFS/BOARD LOCKS
 PLATING OPTIONS _____
 1 = GOLD FLASH
 A = 30u" GOLD MATING AREA/GOLD FLASH TAILS
 9 = 30u" GOLD MATING AREA/TIN TAILS

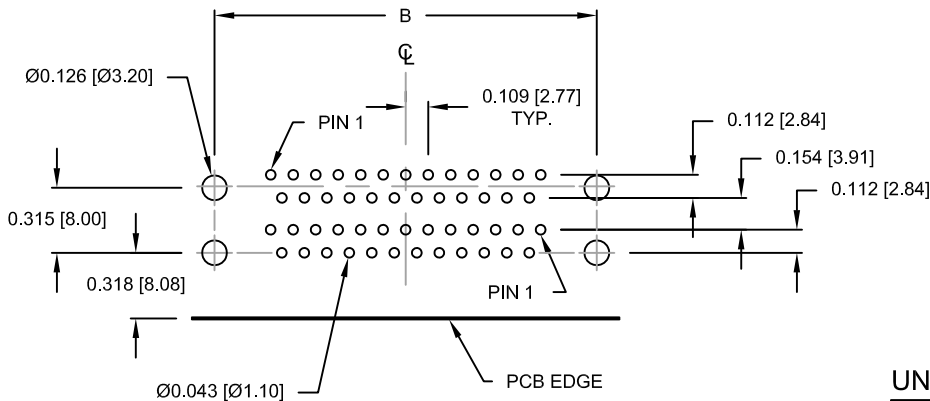

RECOMMENDED PCB LAYOUT

UNITS = inch [mm] DO NOT SCALE FROM DRAWING



THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF NorComp AND SHALL NOT BE REPRODUCED, COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.

DRAWN:	C. SMITH	DATE:	03-30-07
--------	----------	-------	----------

SCALE:	SHEET	OF	REV
NTS	1	1	7

DWG NO. 178-YYY-413R571

RoHS COMPLIANT

NorComp