



4500 MHz Cavity Bandpass Filter

Part Number: AE4500B11856



Electrical specifications

Center Frequency: 4500 MHz
Pass Band: 4400-4600 MHz
Insertion loss: 0.8 dB Max
Return loss: 15 dB Min
Rejection: $\geq 70\text{dB}@F_c \pm 300\text{ MHz}$
Power Handling: 40 W CW


Mechanical

Mounting Method: 4-40 Threaded Mounting Holes
Connector Type: Removable SMA Female
Dimensions: 97 x 51 x 25 mm

Environmental

Operating Temperature: -30 to +70°C
Storage Temperature: -55 to +95°C
Shock: 20 G. 11ms
Vibration: 20 G. 5 to 200 Hz
Drop test: 2 feet

Outline Drawing:

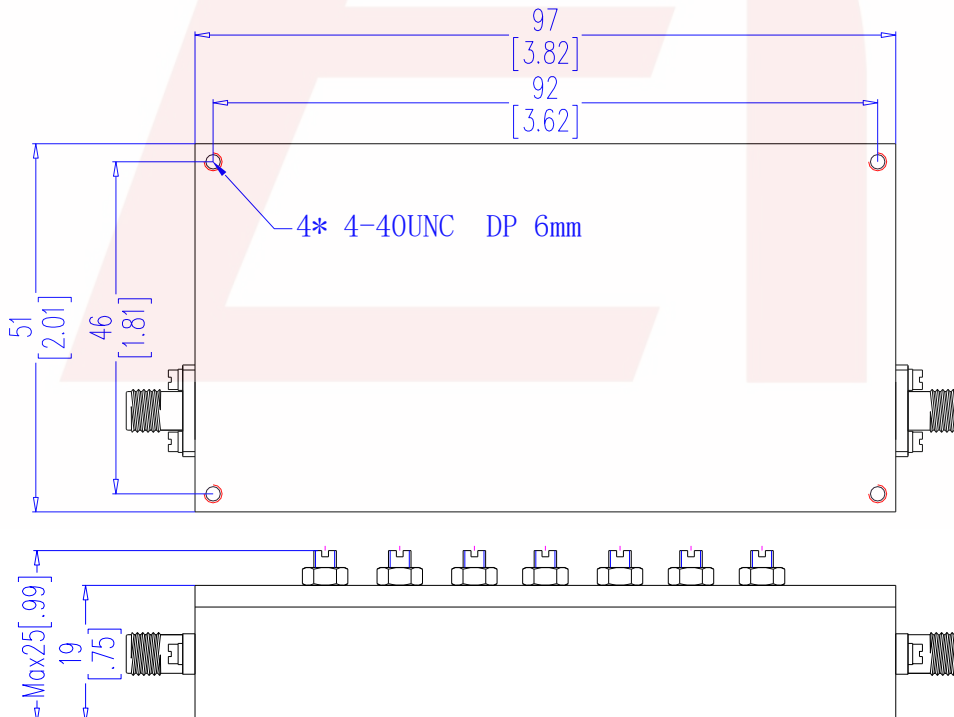



Simulation plot

