Customer No.:	No.1

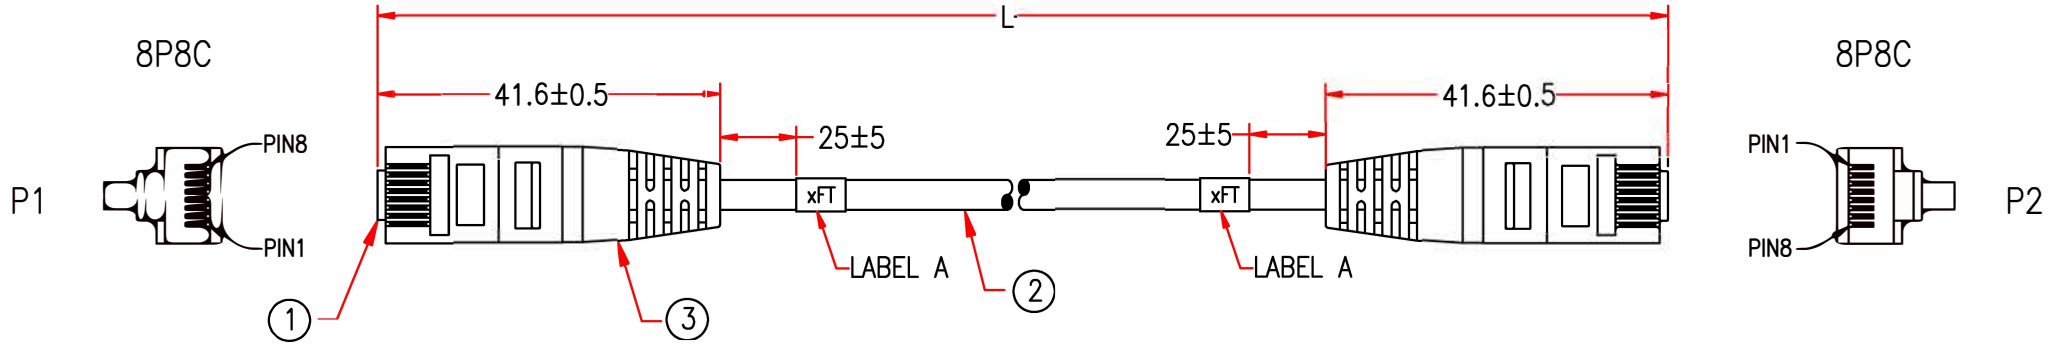

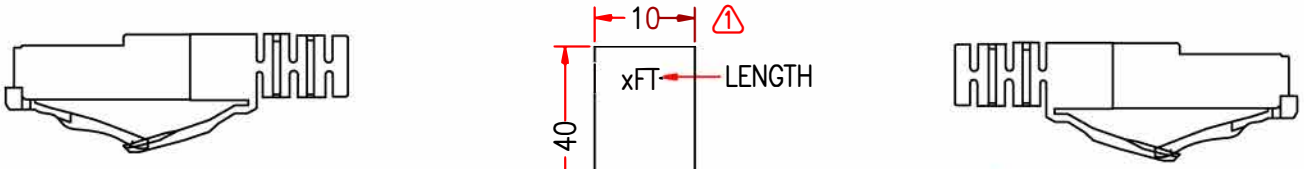



Cable is 100% component level tested

2 MARKING:

(UL) E305668 TYPE CM 28AWG 75°C

CM 28AWG 75°C ETL VERIFIED

MINI UTP CAT.6 RoHS COMPLIANCE

C(UL) E305668

TIA/EIA-568.2-D

BATCH NO.

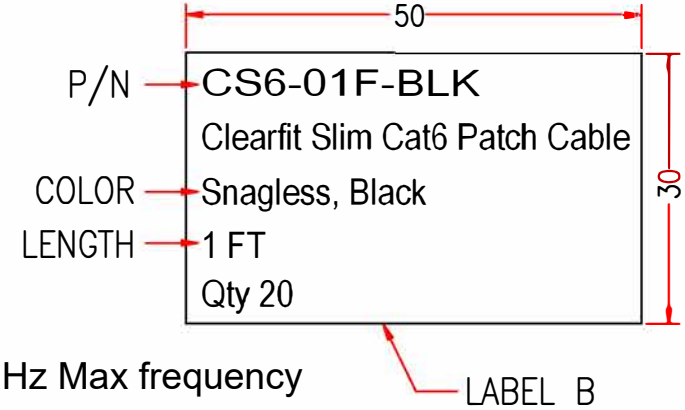

550MHz Max frequency

*NOTE: All relevant materials are complied with RoHS directive .
THE LABEL A IS WATERPROOF.

8C09-3

P1		P2	
1		1	WHITE/ORANGE
2		2	ORANGE
3		3	WHITE/GREEN
6		6	GREEN
4		4	BLUE
5		5	WHITE/BLUE
7		7	WHITE/BROWN
8		8	BROWN

No.	DESCRIPTION		Q'TY	Supplier
3	8P8C TRANSPARENT BOOT(OD4.5mm)	A4FK36-0205	2	M205
2	4 TWISED PAIRS MINI CAT.6 28AWG UTP, OD 3.6mm, JACKET SEE LIST, DRAWING No.EU002804P-643	H5AJ33-0304	L+10mm	M304
1	8P8C MODULAR PLUG, GOLD PLATING 50u" ON CONTACTS, NO:P8-063-11	A1NC36-0205	2	M205

APPROVED		UNC
CHECKED	HU	
DRAWING	XIAO	
DATE	02/JUL/19	ITEM NO.

Cable Length Unless Other Spec. Tolerances:

0 ~200mm	±10mm
201~1000mm	±20mm
1001 ~1500mm	±25mm
1501~2100mm	±30mm
2100mm↑	±40mm

UNIT:mm

2 REV.2 2019.07.02	MODIFY MARKING	
1 REV.1 2019.03.25	MODIFY LABEL SIZE & PACKING	CHECKED