

MATERIALS AND FINISHES:

BNC PLUG  
COUPLING NUT : ZINC ALLOY  
PLATED NICKEL

BODY : BRASS  
PLATED NICKEL

INSULATOR : POLYPROPYLENE

OUTER CONTACT : BRASS  
PLATED NICKEL

CENTER CONTACT : BRASS  
PLATED GOLD

SPRING WASHER : BERYLLIUM COPPER  
PLATED NICKEL

RETAINING RING : BRASS  
PLATED NICKEL

WASHER : BRASS  
PLATED NICKEL

GASKET : SILICONE RUBBER

SMA PLUG  
BODY, COUPLING NUT: BRASS  
PLATED NICKEL

CENTER CONTACT: BERYLLIUM COPPER  
PLATED GOLD

INSULATOR: TEFLON

GASKET: SILICONE RUBBER

C'RING: BERYLLIUM COPPER

CRIMP TUBE: BRASS  
PLATED NICKEL

CABLE: RG58 OR EQUIVALENT

SHRINK TUBE: VERSAFIT OR EQUIVALENT

PACKAGING: BY POLY BAG

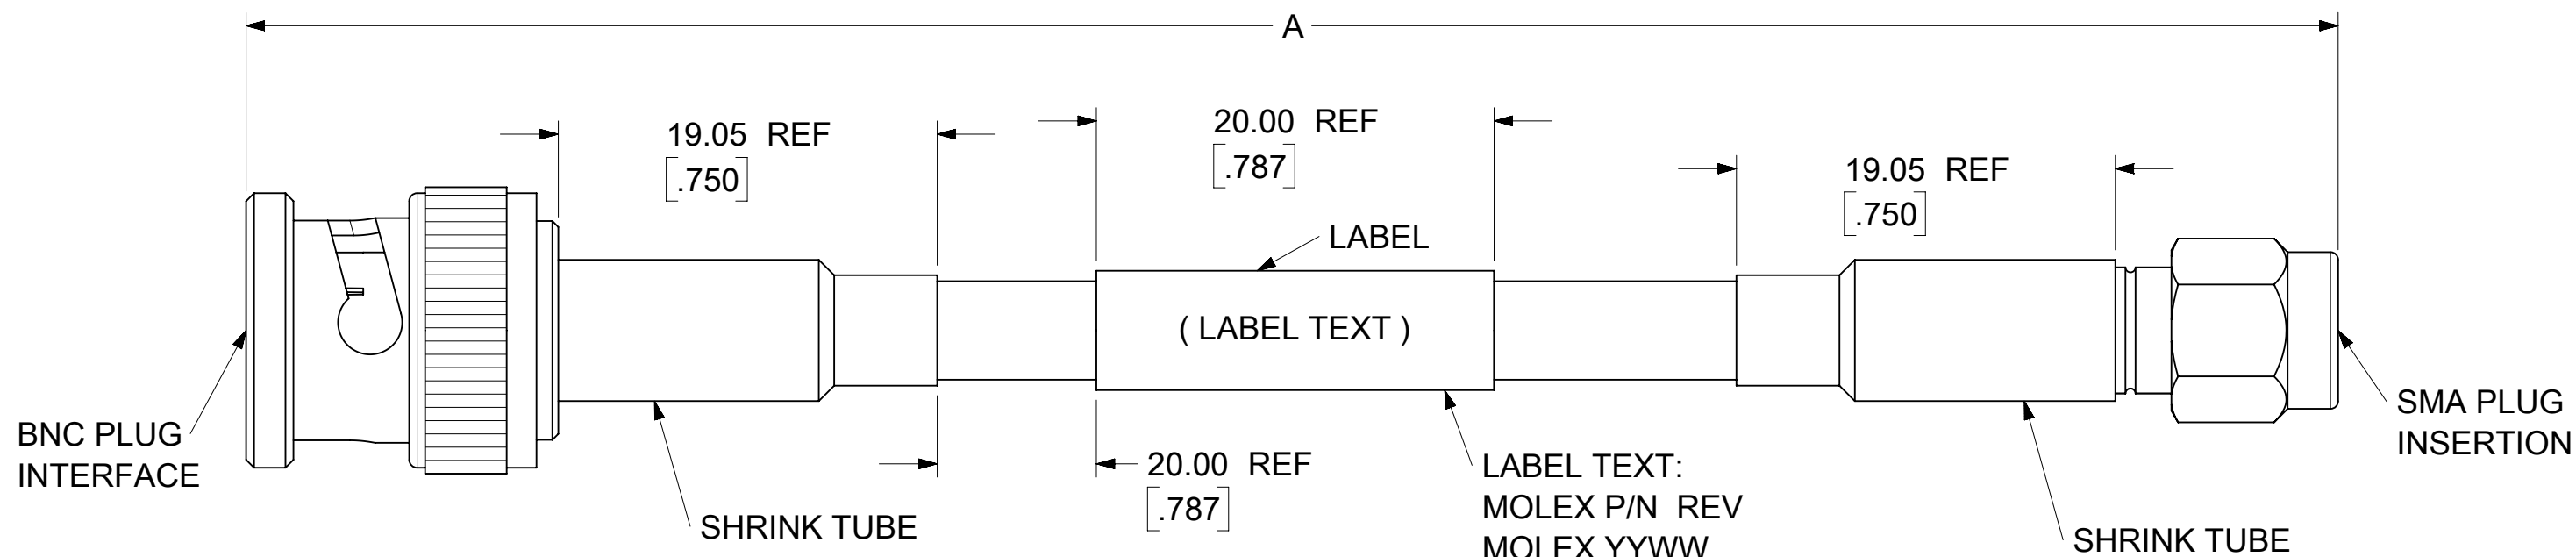


TABLE 1:

SPECIFICATION	DESCRIPTION
MIL-STD-348A, FIG. 301.1	SMA PLUG INTERFACE
MIL-STD-348A, FIG. 301.1	BNC PLUG INTERFACE

TABLE 2:

73230-5294	48.000±.591	1219.20±15.00
73230-5293	39.370±.591	1000.00±15.00
73230-5292	36.000±.472	914.40±12.00
73230-5291	24.000±.315	609.60±8.00
73230-5290	12.000±.197	304.80±5.00
PART NO.	IN	MM
	DIM A	

FUNCTIONAL SYMBOLS	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION		CURRENT REV DESC:			molex		
FA = 0	DIMENSION UNITS	SCALE	EC NO: 675763 DRWN: WANGR2 2021/06/17 CHK'D: MYLU07 2021/08/30 APPR: LCHEN03 2021/08/30			CA BNC PLUG STR TO SMA PLUG STR WITH RG58 CABLE EWR#14549-A		
EA = 0	MM/INCH	3:1						
EA = 0	GENERAL TOLERANCES (UNLESS SPECIFIED)		INITIAL REVISION: DRWN: WANGR2 2021/06/17 APPR: LCHEN03 2021/08/30			PRODUCT CUSTOMER DRAWING		
EA = 0	ANGULAR TOL ± 2.0°							
NEW RELEASE	4 PLACES ±		DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS			DOCUMENT NUMBER <b>732305290</b>		
#####	3 PLACES ±							
	2 PLACES ±		THIRD ANGLE PROJECTION			DOC TYPE DOC PART REVISION PSD 000 A		
	1 PLACE ±							
	0 PLACES ±		DRAWING SERIES C-SIZE 73230			MATERIAL NUMBER CUSTOMER SHEET NUMBER SEE TABLE 2 GENERAL MARKET 1 OF 1		