
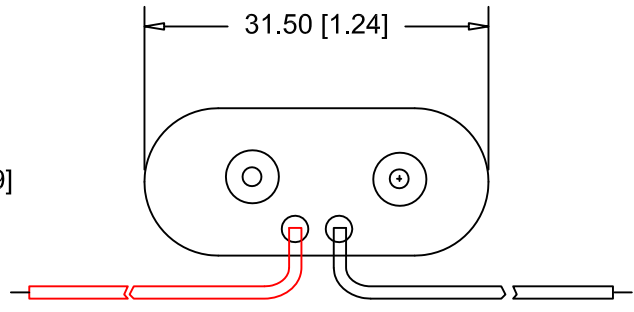
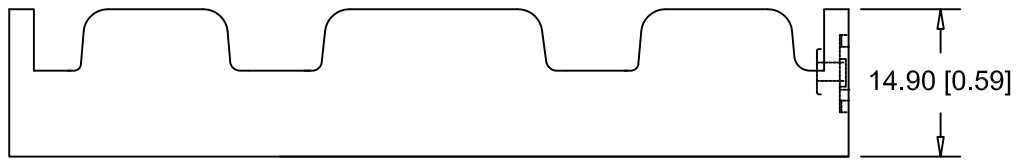



Date	SYM	REVISION RECORD	AUTH	DR.	CK.
07/12/13	B	UPDATED TO ROHS 2 COMPLIANT	T.B.	B.S.	
05/12/17	C	DIM. 108.4 WAS 108.46 DIM. 150.0 WAS 152.4 DIM. 5.0 WAS 3.18	T.B.	B.S.	

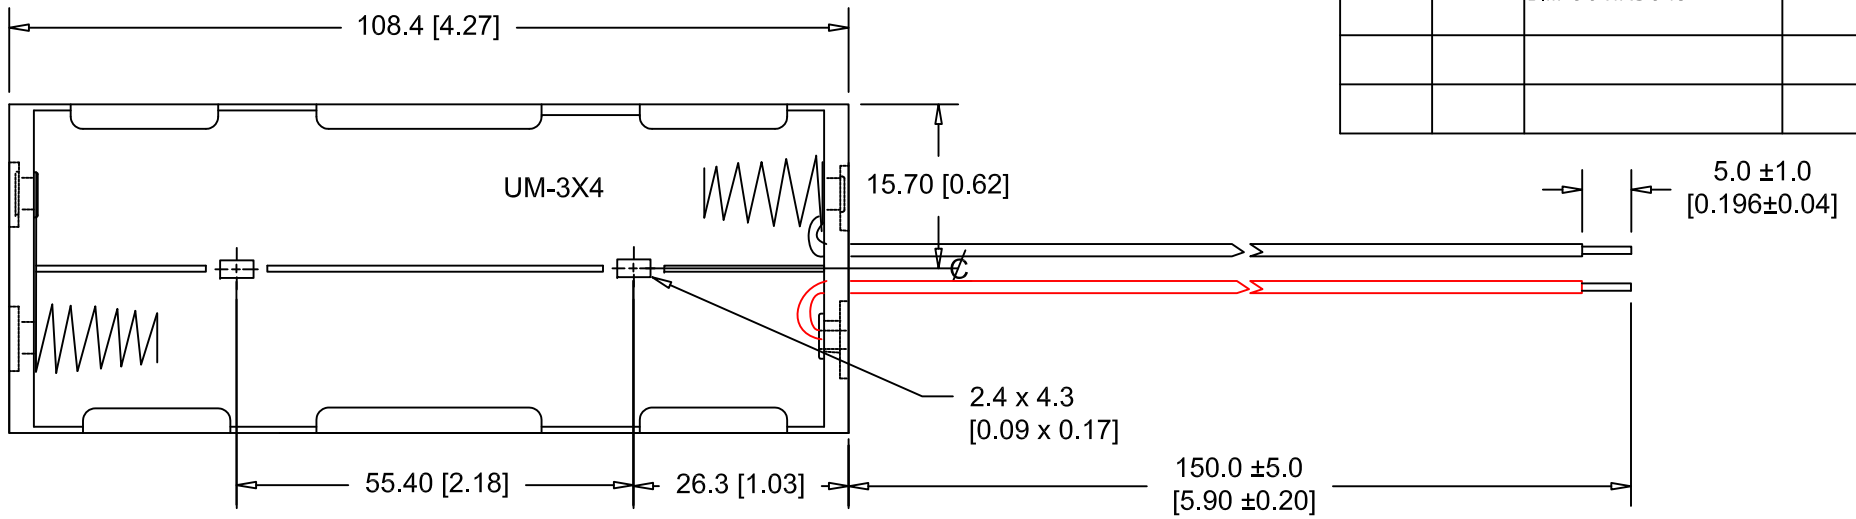

SPECIFICATIONS :

- Plastic material - polypropylene
- Flammability Rating-UL94 HB, UL File No. E216959
- Temperature RangeE: -10°C to +100°C
- Springs - nickel plated spring steel
- Wire - 26 AWG, UL1007, CSA - TR-64, 300V, 80° C.
- Rivets - Brass, nickel plated
- Contact Resistance: Under 50mΩ for +/- contacts per EIA-540J000
- ROHS 2 COMPLIANT

Tolerance (Except as noted)	 Memory Protection Devices, Inc 200 Broad Hollow Road, Farmingdale, New York 11735	Scale	Drawn By B.S.
			Approved By T.B.
decimal ±.5 (.020)	Title FOUR "AA" CELL HOLDER WITH WIRE LEADS	Date 05/12/17	
Fractional ± .8 (.030)		Drawing Number BH34AAW	
Angular ± 3°			