





P1	M-Y1219B
	M-1219A
P2	M-1218A

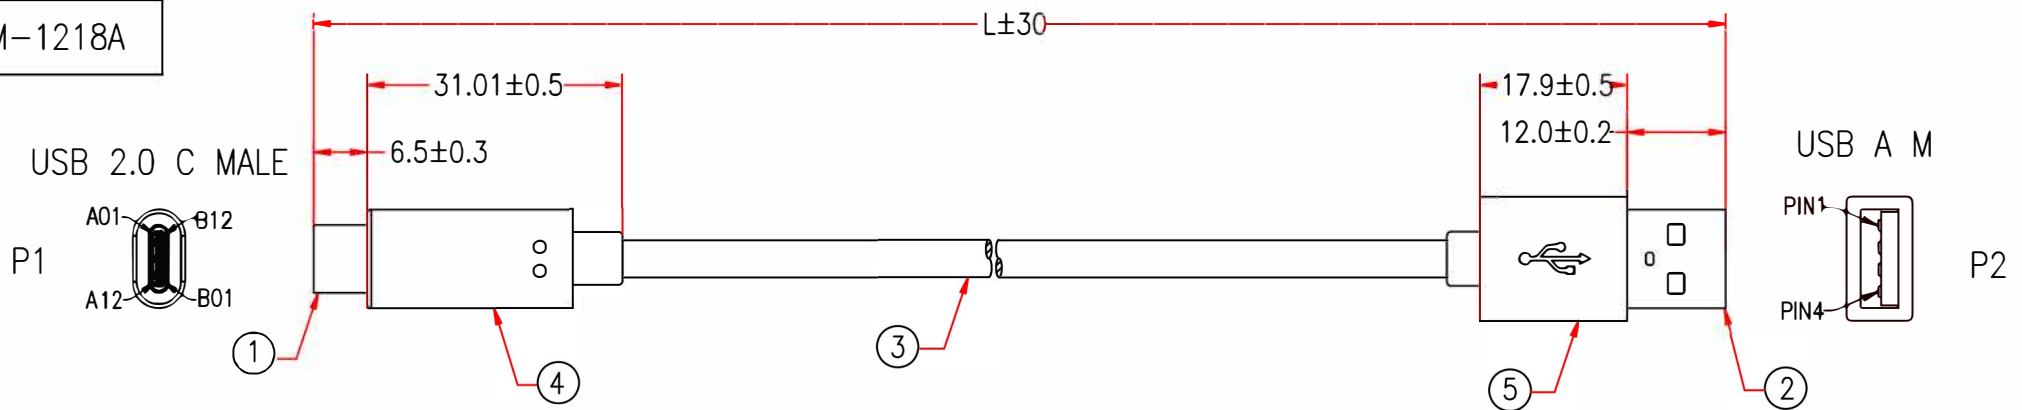

Connection Point:

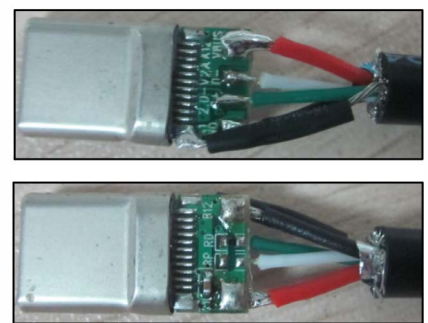

⑤		

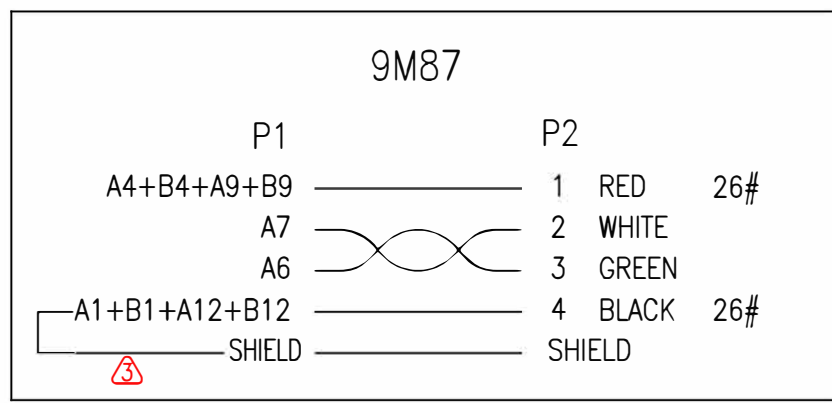

NOTE: All relevant materials are complied with RoHS directive .

5	MOLDED PVC BLACK	H1BF01-0304K09		M304
4	BLACK HEAT SHRINK TUBE $\phi 1.0*10\text{mm}$	A4HA02-0959	1	M959
	MOLDED PE COLOR TRANSPARENT	A5BA02-7777		M7777
3	MOLDED PVC BLACK	H1BF01-0304K09		M304
	USB 2.0 CABLE, UL STYLE 1 TWISD PAIR 28AWG AND 2C 26AWG, OD 4.5mm, JACKET BLACK, DRAWING No. EUAB2801P2602C-050	H5KH05-0304K09	L-20mm	M304
2	USB A MALE, GOLD FLASH ON CONTACTS, WHITE INSULATOR, SHORT THREE PIECES TYPE	A1HA87-0636	1SET	M636
1	USB 2.0 C MALE , GOLD FLASH ON CONTACTS, WITH PCB, BLACK INSULATOR RESISTANCE 56K ohm	A1HH40-0636	1SET	M636
No.	DESCRIPTION	Q'TY		Supplier

APPROVED				Cable Length Unless Other Spec. Tolerances: 0 ~200mm $\pm 10\text{mm}$ 201~1000mm $\pm 20\text{mm}$ 1001 ~1500mm $\pm 25\text{mm}$ 1501~2100mm $\pm 30\text{mm}$ 2100mm $\uparrow$ $\pm 40\text{mm}$	
CHECKED	HU				
DRAWING	XIAO				
DATE	02/AUG/19	ITEM NO.	USBC-USB-XXF	UNIT:mm	

④ REV.4 2019.05.30	MODIFY CONNECTOR SUPPLIER	⑤ REV.5 2019.08.02	ADD P/N.
③ REV.3 2017.10.10	MODIFY PIN OUT AND ADD BLACK HEAT SHRINK TUBE		
② REV.2 2017.7.20	MODIFY CONNECTOR SUPPLIER		
① REV.1 2016.8.25	MODIFY CONNECTOR DESCRIPTION	CHECKED	