



UNIT: mm

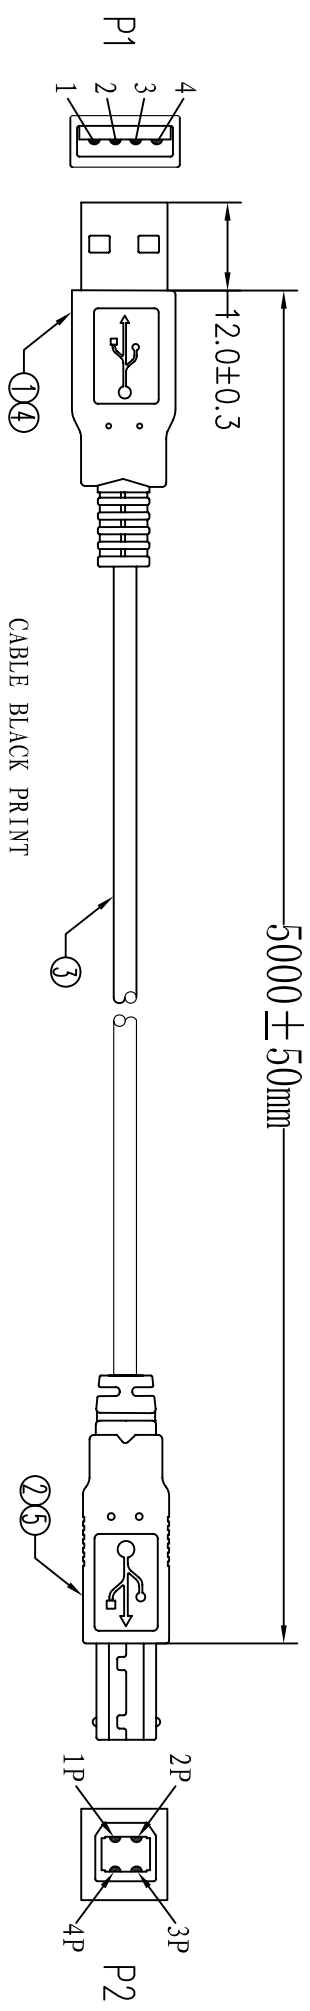


CABLE BLACK PRINT  
 USB CABLE E189529 **RU** AWM 2725 28AWG/1PR AND  
 24AWG/2C 80°C 30V VW-1

PIN ASSIGNMENT:

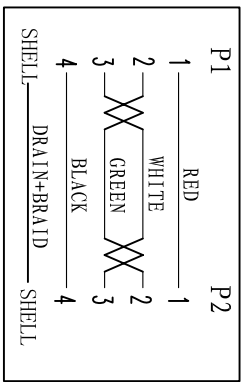

**Electrical test:**  
 1. 100% short, open, miswire test  
 2. Conduct resistance: 5 Ohm(max)  
 3. Insulation resistance: 5Mohm(min)  
 4. dielectric test: DC 300V

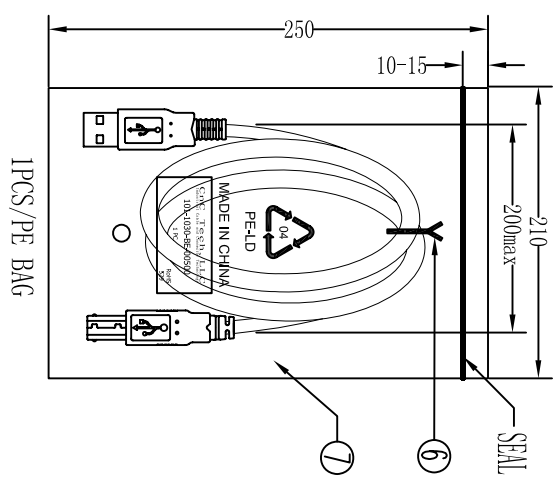

1PCS/PE BAG

⑧	PE BAG	1/5	CLEAR SIZE: 330*380*40.05mm PRINT BLACK "MADE IN CHINA" + "5PCS"
⑦	PE BAG	1	CLEAR SIZE: 210*250*40.05mm PRINT BLACK "MADE IN CHINA" + "1PC"
⑥	TIE	1	WHITE L=150mm
⑤	OUT JACKET	6g	BEIGE (IV-29#) PVC-40P (MOULD NO: WM-65)
④	OUT JACKET	6g	BEIGE (IV-29#) PVC-40P (MOULD NO: WM-40)
③	CABLE	1	BEIGE (IV-29#) USB1. 1 UL2725 28#/1P+24#/2C+AEB OD: 4.7mm L=5000 ± 20mm
②	CONN	1set	USB B MALE SHELL: NICKEL PIN G/F 3PCS TYPE INSULATOR COLOR: WHITE
①	CONN	1set	USB A MALE SHELL: NICKEL PIN G/F 3PCS TYPE INSULATOR COLOR: WHITE
NO.	NAME	QTY	SPECIFICATION

# CNC Tech, LLC

Industrial Cable and Connector Technology

DRAWN	ZHONGHS	DRAWING NO	
CHECKED		CUSTOMER	
APPROVAL		ITEM NO.	101-1030-BE-00500
DECIDED		DATE	2012-02-15
VERSIONS/EDITION	A/0	PROJECTION	

4

3

2

1

A

B

C

D

A

B

C

D