


RIGHT ANGLED PLUG

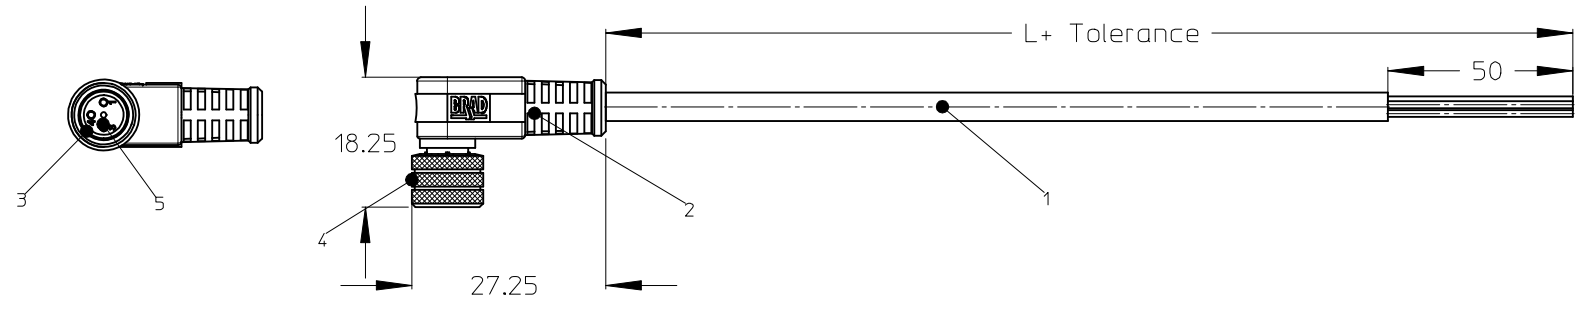

NOTES:

Temperatur Range -25°C/+80°C
 Contact Current Rating 3A
 Voltage Rating 3 poles 60V
 4-5 poles 30V
 Protection class IP 67

Cable:

E02 = 0,25mm², PVC black
 H08 = 0,25mm², PUR black, LSOH
 I02 = 0,25mm², PVC grey irradiated
 K05 = 0,34mm², TPE yellow
 P02 = 0,25mm², PUR/PVC black
 P08 = 0,25mm², PUR yellow HIFLEX
 P82 = 0,34mm², PUR black irradiated

Tolerances:

≤ 1 m	+20/-10 mm
1 m - 5 m	± 25 mm
5 m - 10 m	± 30 mm
> 10 m	± 30 mm
> 20 m	± 50 mm

6	O-Ring	Rubber	---
5	Contact	Copper Alloy	Gold plated
4	Coupling Nut	Brass	Ni plated
3	Insert	PUR	---
2	Overmold	PUR	---
1	Cable	See Table	---
ITEM	Part	Material	Finish

3 WIRE		4 WIRE		5 WIRE	
1	Brown	1	Brown	1	Brown
2	-	2	White	2	White
3	Blue	3	Blue	3	Blue
4	Black	4	Black	4	Black
5	-	-	-	5	Grey

ENTER DESCRIPTION EC NO: IPG2013-2043 DRWN: APOHL 2013/02/19 CHKD: CBURGER APPR: CBURGER 2013/06/27	QUALITY SYMBOLS ▽=0 ▽=0	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM ONLY		SCALE 1:1	DESIGN UNITS METRIC		THIRD ANGLE PROJECTION	
		4 PLACES ± --- ± --- 3 PLACES ± --- ± --- 2 PLACES ± --- ± --- 1 PLACE ± 0.3 ± ---	mm INCH ± --- ± --- ± --- ± --- ± 0.3 ± ---	DRAWN BY APOHL	DATE 2011/10/18	TITLE CSE M8 XP XC FE RA XM SE UNSH NANO-CHANGE		MOLEX INCORPORATED		MATERIAL NO. SEE TABLE
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		ANGULAR ± 1 °		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION						

7

6

5

4

3

2

1

NUMERICAL CODE (Available parts see table page 3 ff others on request.)



40 = M8x1
single ended

poles:
3 = 3 poles
4 = 4 poles
5 = 5 poles

header:
001 = plug female 90° right

Cable:

- E02 = 0,25mm², PVC black
- H08 = 0,25mm², PUR black, LSOH
- I02 = 0,25mm², PVC grey irradiated
- K05 = 0,34mm², TPE gelb
- P02 = 0,25mm², PUR/PVC black
- P08 = 0,25mm², PUR yellow HIFLEX
- P82 = 0,34mm², PUR black irradiated

M = meter

length:
Example
020 = 2 m

Special Types:

- G = Brad in black
- H = Std with ID tag
- 1 = Stainless Steel
- 7 = Teflon coat

ENTER DESCRIPTION EC NO: IPG2013-2043 DRWN: APOHL 2013/02/19 CHKD: APPR: CBURGER 2013/06/27	QUALITY SYMBOLS = 0 = 0	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM ONLY		SCALE 1:1	DESIGN UNITS METRIC	THIRD ANGLE PROJECTION		
			mm	INCH	DRAWN BY APOHL	DATE 2011/10/18	TITLE CSE M8 XP XC FE RA XM SE UNSH NANO-CHANGE			
		4 PLACES	± ---	± ---	CHECKED BY REISSNER	DATE 2012/01/16				
		3 PLACES	± ---	± ---	APPROVED BY CBURGER	DATE 2012/01/18	MOLEX INCORPORATED MATERIAL NO. SEE TABLE DOCUMENT NO. SD-120086-006			
		2 PLACES	± ---	± ---	DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS					
1 PLACE	± 0.3	± ---	ANGULAR ± 1 °		SHEET NO. 2 OF 3		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION			

6

5

4

3

2

1

PART LIST:

1200868293	403001E02M010	1200270101	403001P08M060	1200270164	404001P08M020
1200270090	403001E02M020	1200270102	403001P08M100	1200270166	404001P08M050
1200868021	403001E02M030	1200868154	403001P08M150	1200270167	404001P08M100
1200270092	403001E02M050	1200868007	403001P82M010	1200271232	404001P82M050
1200865039	403001E02M050H	1200868044	403001P82M0107	1200271044	404001P82M0507
1200868422	403001E02M0501	1200271181	403001P82M020	1200868178	405001E02M020
1200868294	403001E02M060	1200271062	403001P82M050	1200868179	405001E02M050
1200270093	403001E02M100	1200868356	404001E02M010	1200868180	405001E02M100
1200868295	403001E02M150	1200270152	404001E02M020	1200868396	405001H08M020
1200868296	403001E02M200	1200868357	404001E02M0201	1200868406	405001H08M050
1200868297	403001E02M250	1200868361	404001E02M030	1200868407	405001H08M100
1200868052	403001H08M020	1200270153	404001E02M050	1200868391	405001P02M020
1200271333	403001H08M020G	1200868424	404001E02M050G	1200868223	405001P02M050
1200868091	403001H08M030	1200868362	404001E02M050H	1200868519	403001P02M010
1200868054	403001H08M050	1200868359	404001E01M0501	1200868533	404001P02M010
1200271415	403001H08M050G	1200270154	404001E02M100		
1200868004	403001H08M100	1200868057	404001E02M150		
1200868298	403001I02M005	1200868360	404001E02M200		
1200868299	403001I02M006	1200868055	404001H08M010		
1200868300	403001I02M010	1200271328	404001H08M020		
1200270034	403001I02M020	1200868401	404001H08M020G		
1200868301	403001I02M025	1200868363	404001H08M030		
1200270097	403001I02M030	1200868211	404001H08M050		
1200270098	403001I02M050	1200868077	404001H08M100		
1200270474	403001I02M100	1200868208	404001I02M020		
1200860350	403001K05M020	1200270161	404001I02M030		
1200860351	403001K05M050	1200270162	404001I02M050		
1200860352	403001K05M100	1200270163	404001I02M100		
1200868155	403001P02M020	1200868364	404001I02M150		
1200868089	403001P02M050	1200860377	404001K05M050		
1200868062	403001P02M100	1200860378	404001K05M100		
1200868082	403001P02M150	1200868159	404001P02M020		
1200270099	403001P08M020	1200868081	404001P02M050		
1200270100	403001P08M030	1200868160	404001P02M100		
1200860473	403001P08M050	1200868365	404001P02M150		

ENTER DESCRIPTION EC NO: IPG2013-2043 DRWN: APOHL CHKD: APPR: CBURGER 2013/02/19 2013/06/27	QUALITY SYMBOLS ▽=0 ◻=0	GENERAL TOLERANCES (UNLESS SPECIFIED) mm INCH 4 PLACES ± --- ± --- 3 PLACES ± --- ± --- 2 PLACES ± --- ± --- 1 PLACE ± 0.3 ± --- ANGULAR ± 1 °	DIMENSION STYLE MM ONLY DRAWN BY: APOHL DATE: 2011/10/18 CHECKED BY: REISSNER DATE: 2012/01/16 APPROVED BY: CBURGER DATE: 2012/01/18	SCALE 1:1	DESIGN UNITS METRIC	THIRD ANGLE PROJECTION	TITLE CSE M8 XP XC FE RA XM SE UNSH NANO-CHANGE
	DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS	MATERIAL NO. SEE TABLE	DOCUMENT NO. SD-120086-006	SHEET NO. 3 OF 3			