


Data sheet | Item number: 706-100/615-200

Connection cable; 15-pole; with solder pin; Female connector; open-ended;
Length: 2 m; Conductor cross-section: 0.25 mm²



www.wago.com/706-100/615-200

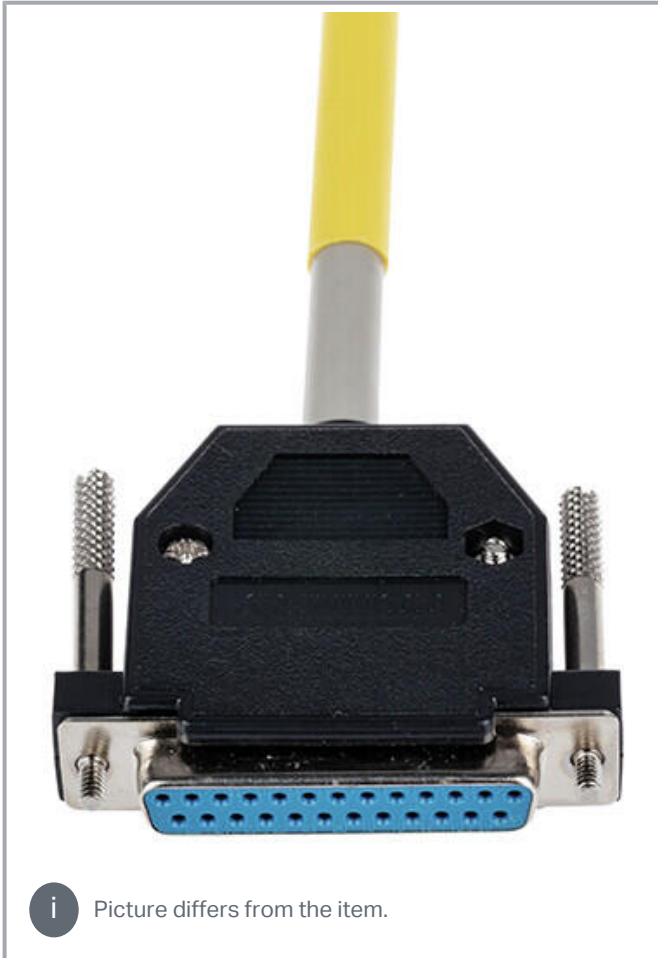

i Picture differs from the item.

Color coding acc. to DIN VDE 47100		15 poles female Sub-D connector	
		Pin number	
White		1	
Brown		2	
Green		3	
Yellow		4	
Grey		5	
Pink		6	
Blue		7	
Red		8	
Black		9	
Violet		10	
Grey-Pink		11	
Red-Blue		12	
White-Green		13	
Brown-Green		14	
White-Yellow		15	
Shield		Connected to Sub-D	

Data Notes

Note When using more than 10 wires, the maximum current per wire must be reduced to 1 A.

Electrical data

Operating voltage \leq AC/DC 35 V
Current per wire (max.) 2 A

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG
Hansastr. 27
32423 Minden
Phone: +49571 887-0 | Fax: +49571 887-169
Email: info.de@wago.com | Web: www.wago.com

Do you have any questions about our products?
We are always happy to take your call at +49 (571) 887-44222.



Connection data

Cable type	LiYCY
Color code	per DIN VDE 47100

Connection 1

Connector	D-subminiature female connector
Pole number 1	15
Connection type 1	System
Wire cross-section	0.25 mm ²
Connection type	D-subminiature

Connection 2

Connector 2	open-ended
Connection type 2	open-ended

Physical data

Cable length	2 m
--------------	-----

Material Data

Weight	1.1 g
--------	-------

Environmental requirements

Ambient temperature (operation)	-20 ... +50 °C
---------------------------------	----------------

Commercial data

ETIM 8.0	EC001855
ETIM 7.0	EC001855
PU (SPU)	1 pcs
Packaging type	box
GTIN	4050821835622
Customs tariff number	85444290900

Environmental Product Compliance

RoHS Compliance Status	Compliant, No Exemption
------------------------	-------------------------

Subject to changes. Please also observe the further product documentation!



Downloads

Environmental Product Compliance

Compliance Search

Environmental Product Compliance 706-100/615-200

URL

Download

Connection cable; 15-pole; with solder pin; Female connector; open-ended; Length: 2 m; Conductor cross-section: 0.25 mm²

Installation Notes

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG

Hansastr. 27

32423 Minden

Phone: +49571 887-0 | Fax: +49571 887-169

Email: info.de@wago.com | Web: www.wago.com

Do you have any questions about our products?

We are always happy to take your call at +49 (571) 887-44222.