





ISSUE NUMBER	
ORIGINAL	(1)

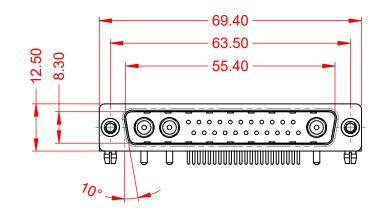




NOTES:

MATERIAL: HOUSING: SHELL: CONTACT:


THERMOPLASTIC POLYESTER, UL94V-0 STEEL, TIN PLATED COPPER ALLOY, GOLD FLASH PLATED



OPERATING TEMPERATURE: -55°C ~ 125°C 10A (CURRENT) POWER/CO-AX CONTACT RATING: (IF PRESENT) SIGNAL CONTACT CURRENT RATING: 5A PER CONTACT SIGNAL CONTACT RESISTANCE: $10m\Omega$ MAX. **INSULATOR RESISTANCE:** 5000MΩ min. DIELECTRIC

.XX ±0.13 .XXX ±0.05

1000V AC rms



		SW REFERENCE NO.: 629 COMBO ASSEMBLY			
	COMBINATION D-SUB		DRAWN: C.B	DATE: JAN. 01/20	19
			CHECKED:	DATE:	
	EDAC INC	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF EDAC INCAND	SCALE: (IN C.A.D. 1:1)	SHEET 1 OF	2
\$ /		SHALL NOT BE REPRODUCED, OR COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.	DRAWING NUMBER: 629-25W3250-113		ISSUE
			PART NUMBER: 629-25W	3250-1T3	1



THIS SERIES FULLY CONFORMS TO THE EUROPEAN UNION DIRECTIVES 2011/65/EU FOR RoHS COMPLIANCY.

YOUR CONNECTION	EDAC INC TORONTO, ONT CANADA ON TO QUALITY & SERV

WITHSTANDING VOLTAGE:

