


NOTICE OF PROPRIETARY RIGHTS THIS DOCUMENT CONTAINS CONFIDENTIAL TECHNICAL DATA, INCLUDING TRADE SECRETS, PROPRIETARY TO TIMES MICROWAVE SYSTEMS. DISCLOSURE OF THIS DATA IS EXPRESSLY CONDITIONED UPON YOUR ASSENT THAT ITS USE IS LIMITED TO USE WITHIN YOUR COMPANY ONLY. ANY OTHER USE IS STRICTLY PROHIBITED WITHOUT THE PRIOR WRITTEN CONSENT OF TIMES MICROWAVE SYSTEMS.

SYM	REVISION DESCRIPTION	DFTM	DATE	APPD	DATE
A	RELEASED FOR PRODUCTION	D. J. H.	6/14/12	J. D. B.	6/15/12
B	CHANGED PER CDC #40320	N. N. N.	5/18/15	J. D. B.	5/19/15
C	CHANGED PER CDC #48884	D. J. H.	5/21/18	D. A. R.	5/29/18

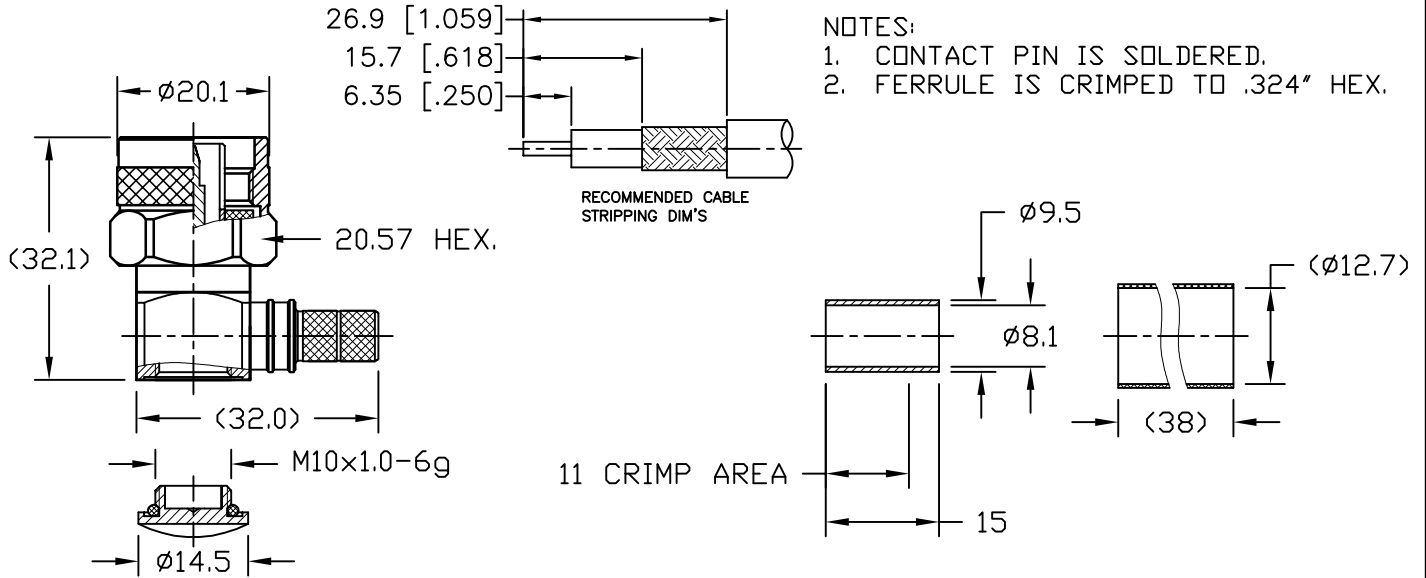

MATERIALS AND PLATING UNIT: MICRO-INCHES		
PART NAME	MATERIALS	PLATING
BODY, SHELL	BRASS C3604	ALBALOY 80 u"/COPPER
CONTACT PIN	BRASS C3604	GOLD 50 u"/NICKEL
INSULATOR	PTFE ASTM-D-1710	N/A
FERRULE	BRASS	ALBALOY 80 u"/COPPER
GASKET	SILICONE	RED

ELECTRICAL SPECIFICATION		
Impedance	50 Ω	
Voltage rating	750 V(rms)	
Frequency range	0~6 GHz	
Dielectric withstanding voltage	>1000 V	
Contact resistance	Center contact	<1.5 mΩ
	Outer contact	<0.2 mΩ
Insulation resistance	>5000 MΩ	
VSWR	<1.3	
Insertion loss	<0.1x √F (GHz)	
RF-leakage	N/A	
3rd Intermodulation	N/A	

MECHANICAL CHARACTERISTICS	
Cable Retention Force	>90 lbs
Force to engage and disengage	<2 lbs
Center contact retention force	> 6 lbs
Recommended coupling torque	9~14 in.lbs
Coupling nut retention force	>100 lbs
Durability	≥500 cycles

ENVIRONMENTAL PARAMETER	
Temperature range	-40°C ~ +125°C
Vibration	US MIL- STD 202, meth. 204 .cond B
Shock	US MIL- STD 202, meth. 213. cond I
Thermal shock	US MIL- STD 202, meth. 107 .cond B

MATERIAL:	UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE IN mm MACHINED SURFACES FINISH 1.6 RMS MAX. REMOVE ALL BURRS 0.15X45° MAX. BREAK MACHINE CORNERS 0.15X45°D MAX. FILLET R. TOLERANCES ON DECIMALS . X ± 0.3 . XX ± 0.15 ANGLES ± 2° FRACTIONS ± N/A	DFTM. D. J. H.	TIMES MICROWAVE SYSTEMS
		DATE 6/14/12	
USED ON: 3		CHKD. J. D. B.	TC-300-NMH-RA-D 90° N MALE FOR LMR300 CABLE
		DATE 6/15/12	
SCALE: N/A	DWG. SIZE A	APPD. J. D. B.	SHEET 1 of 1 SD3190-2761 REV C
		DATE 6/15/12	