



NOTES:

MATERIAL: HOUSING: SHELL: CONTACT:	THERMOPLASTIC POLYESTER, UL94V-0 STEEL, NICKEL PLATED COPPER ALLOY, 30µ GOLD PLATED
OPERATING TEMPERATURE:	-55°C ~ 125°C
POWER/CO-AX CONTACT RATING: (IF PRESENT)	20A (CURRENT)
SIGNAL CONTACT CURRENT RATING: SIGNAL CONTACT RESISTANCE:	5A PER CONTACT 10mΩ MAX.
INSULATOR RESISTANCE:	5000MΩ min.
DIELECTRIC WITHSTANDING VOLTAGE:	1000V AC rms



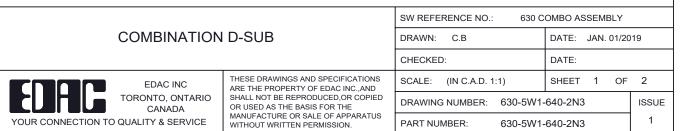



THIS SERIES FULLY CONFORMS TO THE EUROPEAN UNION DIRECTIVES 2011/65/EU FOR RoHS COMPLIANCY.

	E		A		тс
	YOU	R CO	NNEC	TION	FO QL

