


| T | ۵ | П | m | 0 |
|---|---|---|---|---|

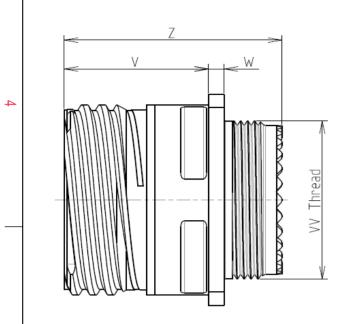

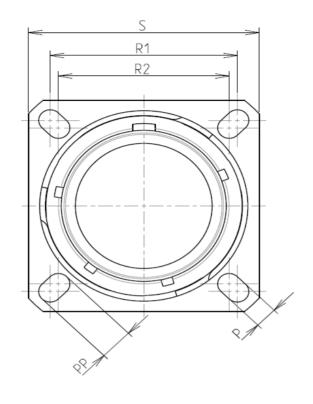



LAYOUT SHOWN AS

Keying Shown as example

## CHARACTERISTICS

BASIC SERIES:

SHELL SIZE : 17

Н

SHELL TYPE : Square Flange Receptacle

CONTACT TYPE : Standard Crimp Contact

PLATING : W = Olive drab Cadmium

ယ

 $\sim$ 

-Standard : Based on MIL-DTL-38999 Series III

| -Shell Material                                  | : Aluminium                                  |  |  |  |  |
|--|--|--|--|--|--|
| -Shell Plating                                   | : Olive drab Cadmium                         |  |  |  |  |
| -Insulator                                       | : Thermoplastic                              |  |  |  |  |
| -Contacts  | : Copper Alloy                               |  |  |  |  |
| -Seals & Grommet                                 | : Silicon Elastomer                          |  |  |  |  |
| -Contact Plating                                 | : Gold over copper Alloy $0.8 \mu m$ minimum |  |  |  |  |
| -Durability                                      | : 500 Mating cycles                          |  |  |  |  |
| -Delivered with Souriau contacts and Accessories |  |  |  |  |  |
| -Temperature Range                               | - 65℃ to +175℃                               |  |  |  |  |
| -Salt Spray                                      | : 500 hours                                  |  |  |  |  |

8D 0

G

17

W

20


В


F

А

| Connector dimension |               |  |  |
|---------------------|---------------|--|--|
| Dim                 | Nominal       |  |  |
| Р                   | 3.25±0.2      |  |  |
| PP                  | 4.93±0.2      |  |  |
| R1                  | 26.97         |  |  |
| R2                  | 24.61         |  |  |
| S                   | 33.3±0.3      |  |  |
| V                   | 20.83+0/-1.25 |  |  |
| W                   | 2.1/2.5       |  |  |
| Z                   | 31.5 Max      |  |  |
| VV THREAD           | M25x1-6g      |  |  |

Е

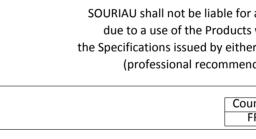

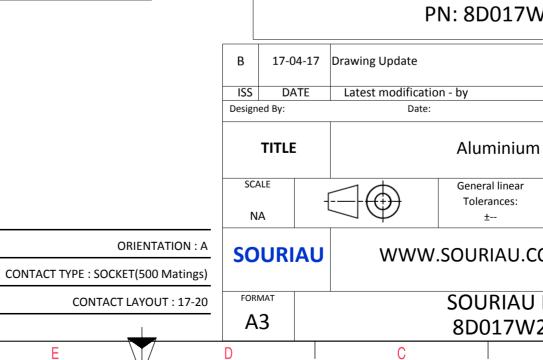

|   | σ                      | I                            | A |        |   |  |
|---|------------------------|------------------------------|---|--------|---|--|
|   |                        |                              |   |        | 4 |  |
| S EXA   | AMPLE                  |                              |   |        | 3 |  |
| s which<br>er of t<br>indatic<br>untry<br>FR  |                        | mply with<br>by a third part |   |        | 2 |  |
| 7W20BA  |                        |                              |   |        |   |  |
|   |                        |                              |   | MOD N° |   |  |
| um  | n Receptacle 8D series |                              |   |        |   |  |
| ar  | NPRDS / PROJECT        |                              |   |        |   |  |
| :   | 859 1                  |                              |   |        |   |  |
| COM<br>This document is the property of<br>SOURIAU<br>it must not be reproduced or<br>communicated without permission |                        |                              |   |        |   |  |
|   | DRG N°                 |                              |   | SHEET  |   |  |
| W20BA-C 1/2   B A   |                        |                              |   |        |   |  |
|   |                        |                              |   |        |   |  |

| Г          | т  | ۵  | г | т | D   | 0  |
|------------|--|--|---|---|---|--|
| 4          | (  | Contact Layout<br>20*  |   |   | <u>ک</u><br>۲                                   | Panel Cuto   |
| _          |  | 4#12<br>16#22D<br>17-20  |   |   | ¥   |  |
| ω          | Ctc<br>A<br>B<br>C<br>D<br>1<br>2<br>3<br>4<br>5 | X Y   0 5.51   3.17 0   0 -5.51   -3.17 0   4.16 7.06   4.29 4.29   7.11 4.03   8.05 1.4   8.05 -1.4                             |   |   |   | Max. thickness panel for receptacle: Type 0: front m   |
| 2          | 6<br>7<br>8<br>9<br>10<br>11<br>12<br>13<br>14   | 8.05 -1.4   7.11 -4.03   4.29 -4.29   4.16 -7.06   -4.16 -7.06   -4.29 -4.29   -7.11 -4.03   -8.05 -1.4   -8.05 1.4   -7.11 4.03 |   |   |   | SOURIAU shall not be liable for a<br>due to a use of the Products v<br>the Specifications issued by either<br>(professional recommend<br>Coun<br>FR<br>PN: 8D017 |
|            | 15<br>16   | -4.29 4.29<br>-4.16 7.06   |   |   | B 17-04-17<br>ISS DATE<br>Designed By:<br>TITLE | Drawing Update<br>Latest modification - by<br>Date:<br>Aluminiu  |
| _ <b>_</b> |  |  |   |   | SCALE<br>NA<br>SOURIAU                          | General linear<br>Tolerances:<br>±<br>WWW.SOURIAU.   |
|            | Н  | G  | F | E | FORMAT<br>A3<br>D                               | SOURIAU<br>8D017V<br>C   |

