
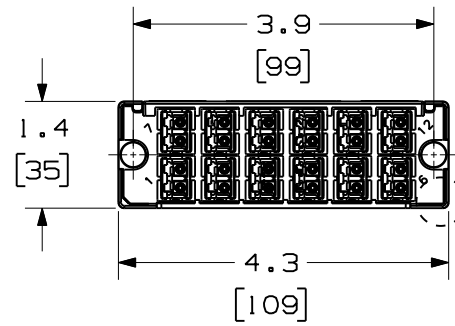



THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

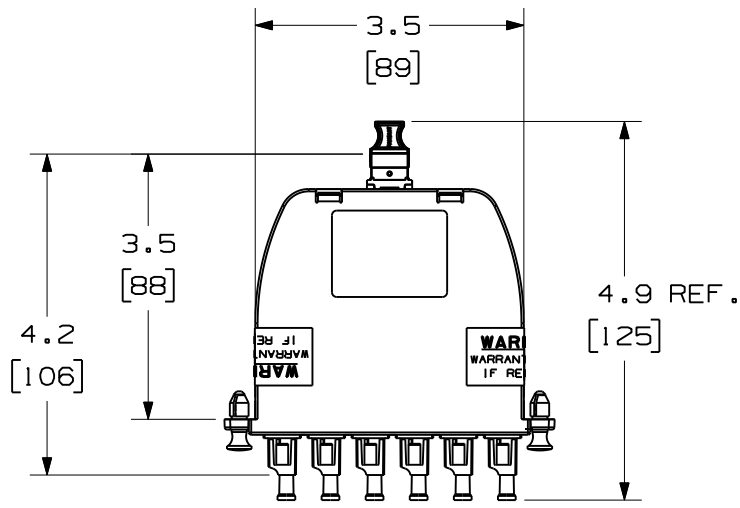

FRONT VIEW
SHOWN W/O DUSTCAPS

SEE SHEETS 2 AND 3 FOR ARTWORK DETAILS

- NOTES:
1. SEE CURRENT CATALOG FOR PART NUMBER SUFFIXES TO INDICATE COLOR AND/OR PACKAGE QUANTITIES.
 2. SEE CATALOG FOR COMPLETE LIST OF PARTS APPLICABLE FOR USE WITH THIS PRODUCT.
 3. PART NUMBERS:
 - A. SEE SHEET 2 FOR METHOD A.
 - B. SEE SHEET 3 FOR METHOD A, PAIR FLIPPED.
 4. THESE CASSETTES COMPLY WITH ANSI/TIA-568-C.0. SEE ANSI/TIA-568-C.0 FOR POLARITY DETAILS AND EXAMPLES OF BASIC LINK.
 5. MATERIALS:
 - A. BOX AND LID: PLASTIC
 - B. ADAPTER: COMPOSITE PLASTIC
 6. CASSETTE WEIGHT: 4.16oz [118g]
 7. DIMENSIONS IN BRACKETS ARE METRIC.

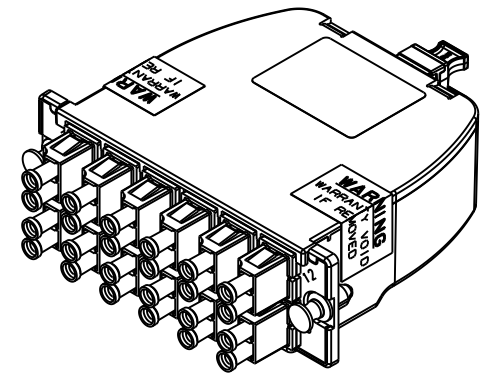


TITLE		24 FIBER DUPLEX LC CASSETTE METHOD A AND METHOD A, PAIR FLIPPED	
CUSTOMER DRAWING			
ITEM REVISION NAME		10F113AB/00	
DATASET FILE NAME		10F113AB_DC/00A	
UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: IN [mm]		MATERIAL:	
.x : .03 [.8] .xxx : .005 [.127]		SEE NOTES	
.xx : .01 [.25] ANGLES : 5 °		DRAWING NUMBER:	
THIRD ANGLE PROJECTION		10F113AB-DC	
DRAWN BY	DATE	CHK	SCALE
SAT	10-01-12	TMSE	NONE
SHT 1 OF 3		A	

REV	DATE	BY	CHK	APR	DESCRIPTION	ECN
R	10-01-12	SAT	TMSE		RELEASED TO PRODUCTION	10F113AB-DC

24 FIBER DUPLEX LC CASSETTE - METHOD A

PART NUMBER	DESCRIPTION
FC2Z0-24-10AS	24 FIBER 50/125um OM4 OPTIMIZED
FC2ZN-24-10AS	24 FIBER 50/125um OM4
FC2X0-24-10AS	24 FIBER 50/125um 10 GbE OM3 OPTIMIZED
FC2XN-24-10AS	24 FIBER 50/125um 10 GbE OM3
FC25N-24-10AS	24 FIBER 50/125um OM2
FC26N-24-10AS	24 FIBER 62.5/125um OM1
FC29N-24-10AS	24 FIBER 9/125um OS1

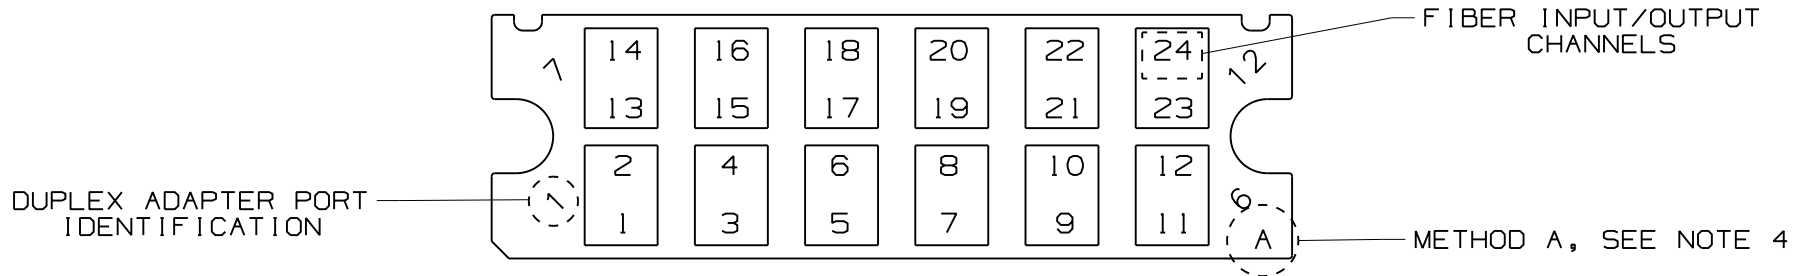

METHOD A - FIBER LAYOUT

REV	DATE	BY	CHK	APR	DESCRIPTION	ECN	DRAWN BY	DATE	CHK	SCALE	SHT 2 OF 3	SIZE
R	10-01-12	SAT	TMSE		RELEASED TO PRODUCTION	10F113AB-DC	SAT	10-01-12	TMSE	NONE		A

TITLE
24 FIBER DUPLEX LC CASSETTE
METHOD A
CUSTOMER DRAWING

ITEM REVISION NAME: 10F113AB/00

DATASET FILE NAME: 10F113AB_DC/00A

UNLESS OTHERWISE SPECIFIED,
DIMENSIONAL TOLERANCES ARE: IN (mm)

.x : .03 (.8) .xxx : .005 (.127)
.xx : .01 (.25) ANGLES : 5 °


THIRD ANGLE PROJECTION

PANDUITTM

MATERIAL: SEE NOTES SHEET 1

DRAWING NUMBER: **10F113AB-DC**

24 FIBER DUPLEX LC CASSETTE - METHOD A, PAIR FLIPPED	
PART NUMBER	DESCRIPTION
FC2Z0-24-10AF	12 FIBER 50/125um OM4 OPTIMIZED
FC2ZN-24-10AF	12 FIBER 50/125um OM4
FC2X0-24-10AF	12 FIBER 50/125um 10 GbE OM3 OPTIMIZED
FC2XN-24-10AF	12 FIBER 50/125um 10 GbE OM3
FC25N-24-10AF	12 FIBER 50/125um OM2
FC26N-24-10AF	12 FIBER 62.5/125um OM1
FC29N-24-10AF	12 FIBER 9/125um OS1

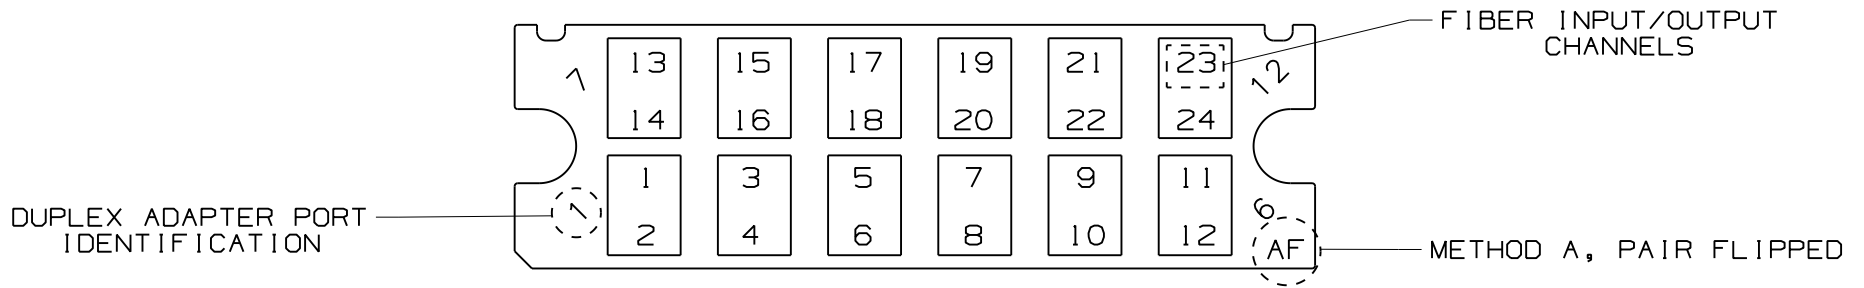

METHOD A, PAIR FLIPPED - FIBER LAYOUT

REV	DATE	BY	CHK	APR	DESCRIPTION	ECN	DRAWN BY	DATE	CHK	SCALE	SHT 3 OF 3	SIZE
R	10-01-12	SAT	TMSE		RELEASED TO PRODUCTION	10F113AB-DC	SAT	10-01-12	TMSE	NONE		A

TITLE		24 FIBER DUPLEX LC CASSETTE METHOD A, PAIR FLIPPED	
ITEM REVISION NAME		10F113AB/00	
DATASET FILE NAME		10F113AB_DC/00A	
UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: IN (mm)		MATERIAL:	
.x : .03 (.8) .xx : .01 (.25)		SEE NOTES SHEET 1	
.xxx : .005 (.127) ANGLES : 5 °		DRAWING NUMBER:	
THIRD ANGLE PROJECTION		10F113AB-DC	

