TOLERANCE UNLESS OTHERWISE SPECIFIED

.X ±0.25


.XX ±0.13


.XXX ±0.10


THIS IS A C.A.D. GENERATED DRAWING DO NOT MAKE MANUAL REVISIONS TO MASTER.



ISSUE NUMBER
ORIGINAL (

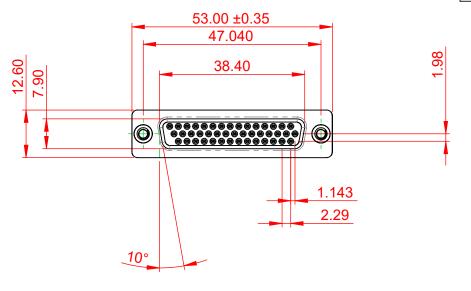





NOTES:

MATERIAL:

HOUSING: THERMOPLASTIC POLYESTER, UL94V-0

SHELL: STEEL, NICKEL PLATED

CONTACT: COPPER ALLOY, 15µ GOLD PLATED

PART NUMBER:


OPERATING TEMPERATURE: -55°C TO 125°C

CURRENT RATING: 3A PER CONTACT

CONTACT RESISTANCE: $25m\Omega$ MAX. INSULATOR RESISTANCE: $5000M\Omega$ min.

DIELECTRIC

WITHSTANDING VOLTAGE: 1000V AC rms



638 SERIES D-SUB CONNECTOR



EDAC INC
TORONTO, ONTARIO
CANADA
CUALITY & CEDIVICE

HESE DRAWINGS
ARE THE PROPERT
SHALL NOT BE REF
OR USED AS THE B
MANUFACTURE OF

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF EDAC INC., AND SHALL NOT BE REPRODUCED, OR COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.

SW REFERENCE NO.: 628 ASSEMBLY	
DRAWN: C.B	DATE: AUG. 01/2018
CHECKED:	DATE:
SCALE: 1:1	SHEET 1 OF 1
DRAWING NUMBER: 638-044-331-059	

638-044-331-059

R#HS COMPLIANT

THIS SERIES FULLY CONFORMS TO THE EUROPEAN UNION DIRECTIVES 2011/65/EU FOR RoHS COMPLIANCY.