

NOTES:

- 1) CORD GRIP RANGE: 16mm TO 17mm
- 2) CONTACT BARREL RANGE: 16AWG TO 18AWG
- 3) RECOMMENDED CRIMP TOOLS: HAND CRIMPER: MFX-3959 PNEUMATIC CRIMPER: MFX-3960
- 4) EXTRACTION TOOL: QXRT16
- 5) MATERIALS:

HOUSING BODY: ZINC DIE CAST, NICKEL PLATED COUPLING NUT: ALUMINUM ALLOY, NICKEL PLATED

WAVE SPRING: STAINLESS STEEL
INSULATION INSERT: PA66, UL94/V-0
CONTACT: BRASS, GOLD FLASH PLATED
SEAL AND O-RING: SILICONE

6) ELECTRICAL DATA:

- a) CURRENT (MAX): 3A
- b) VOLTAGE (MAX): 500VAC
- c) INSULATION RESISTANCE (MIN): 5000M OHMS
- d) TEST VOLTAGE (BETWEEN CONTACTS): 3050V


7) TECHNICAL DATA:

- a) TEMPERATURE RANGE: -40°C TO 115°C
- b) PROTECTION: IP67 (IP69K WHEN IN MATED CONDITION)
- c) MATING CYCLES: >500
- d) VIBRATION RESISTANCE PER MIL-STD-202 METHOD 204
- e) THERMAL SHOCK PER MIL-STD-202 METHOD 207
- f) 48 HOUR SALT SPRAY PER MIL-STD-202 METHOD 101
- 8) RoHS COMPLIANT

RE∨ISIONS									
REV	ECO	DESCRIPTION	DATE	BY	APPR				
01	-	RELEASE NEW DWG FORMAT	-	-	-				
02	-	ADDED IP69K RATING	4/21/2020	RO	DR				

KIT, ECO-MATE RM

ILLUSTRATION: COMPLETE KIT

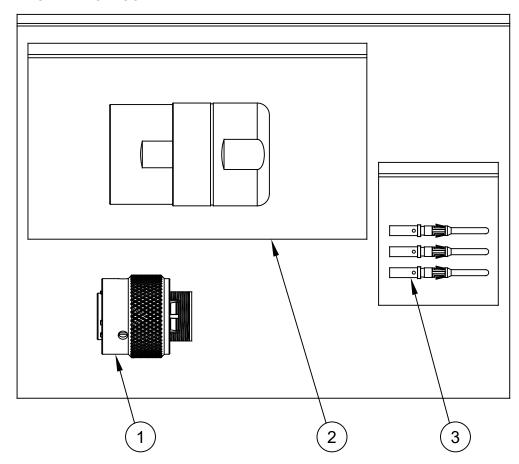

				=			
28	MP16M23F	CONTACT, PIN, SIZE 16	3	_			
1	RT0L-20CPG-S1	CORD GRIP	2				
1	RT062028PNH03SS	CONNECTOR	1	5			
QUANTITY	PART NUMBER	DESCRIPTION	ITEM	-			

QUANTITY	PART N	IUMBER	DESCRIPTION		ITEM			
	MATERIALS LIST							
UNLESS OTHERWISE SPECIFIED		SIGNATURE	S DATE	Amphenol				
1) All dimensions are in metric(mm). 2) Tolerances are as follows: 1 PL DEC ±0.30 2 PL DEC ±0.15 3) PL DEC ±0.15 3) Note reference = MATERIAL SPECIFICATIONS:		DRAWN: MRF	21AUG18					
		CHECKED:		Sine Systems - www.amphenol-sine.com 44724 Morley Drive				
		ENGINEER:				000		
		APPROVAL:		Clinton Township, MI 48036				
		CUSTOMER:		KIT, ECO-MATE RM				
		SHOWN HEREON ARE THE PROPERTY OF THE AMPHENOL CORPORATION. NO RIGHTS OF REPRODUCTION ARE IMPLIED. ALL DIMENSIONS ARE SUBJECT TO NORMAL			,			
PROCESS SPECIFICATIONS:				D C-	RT062028PN		02	
NEXT ASS'Y:				SCALE: NONE		SHEET 1 OF	1	