

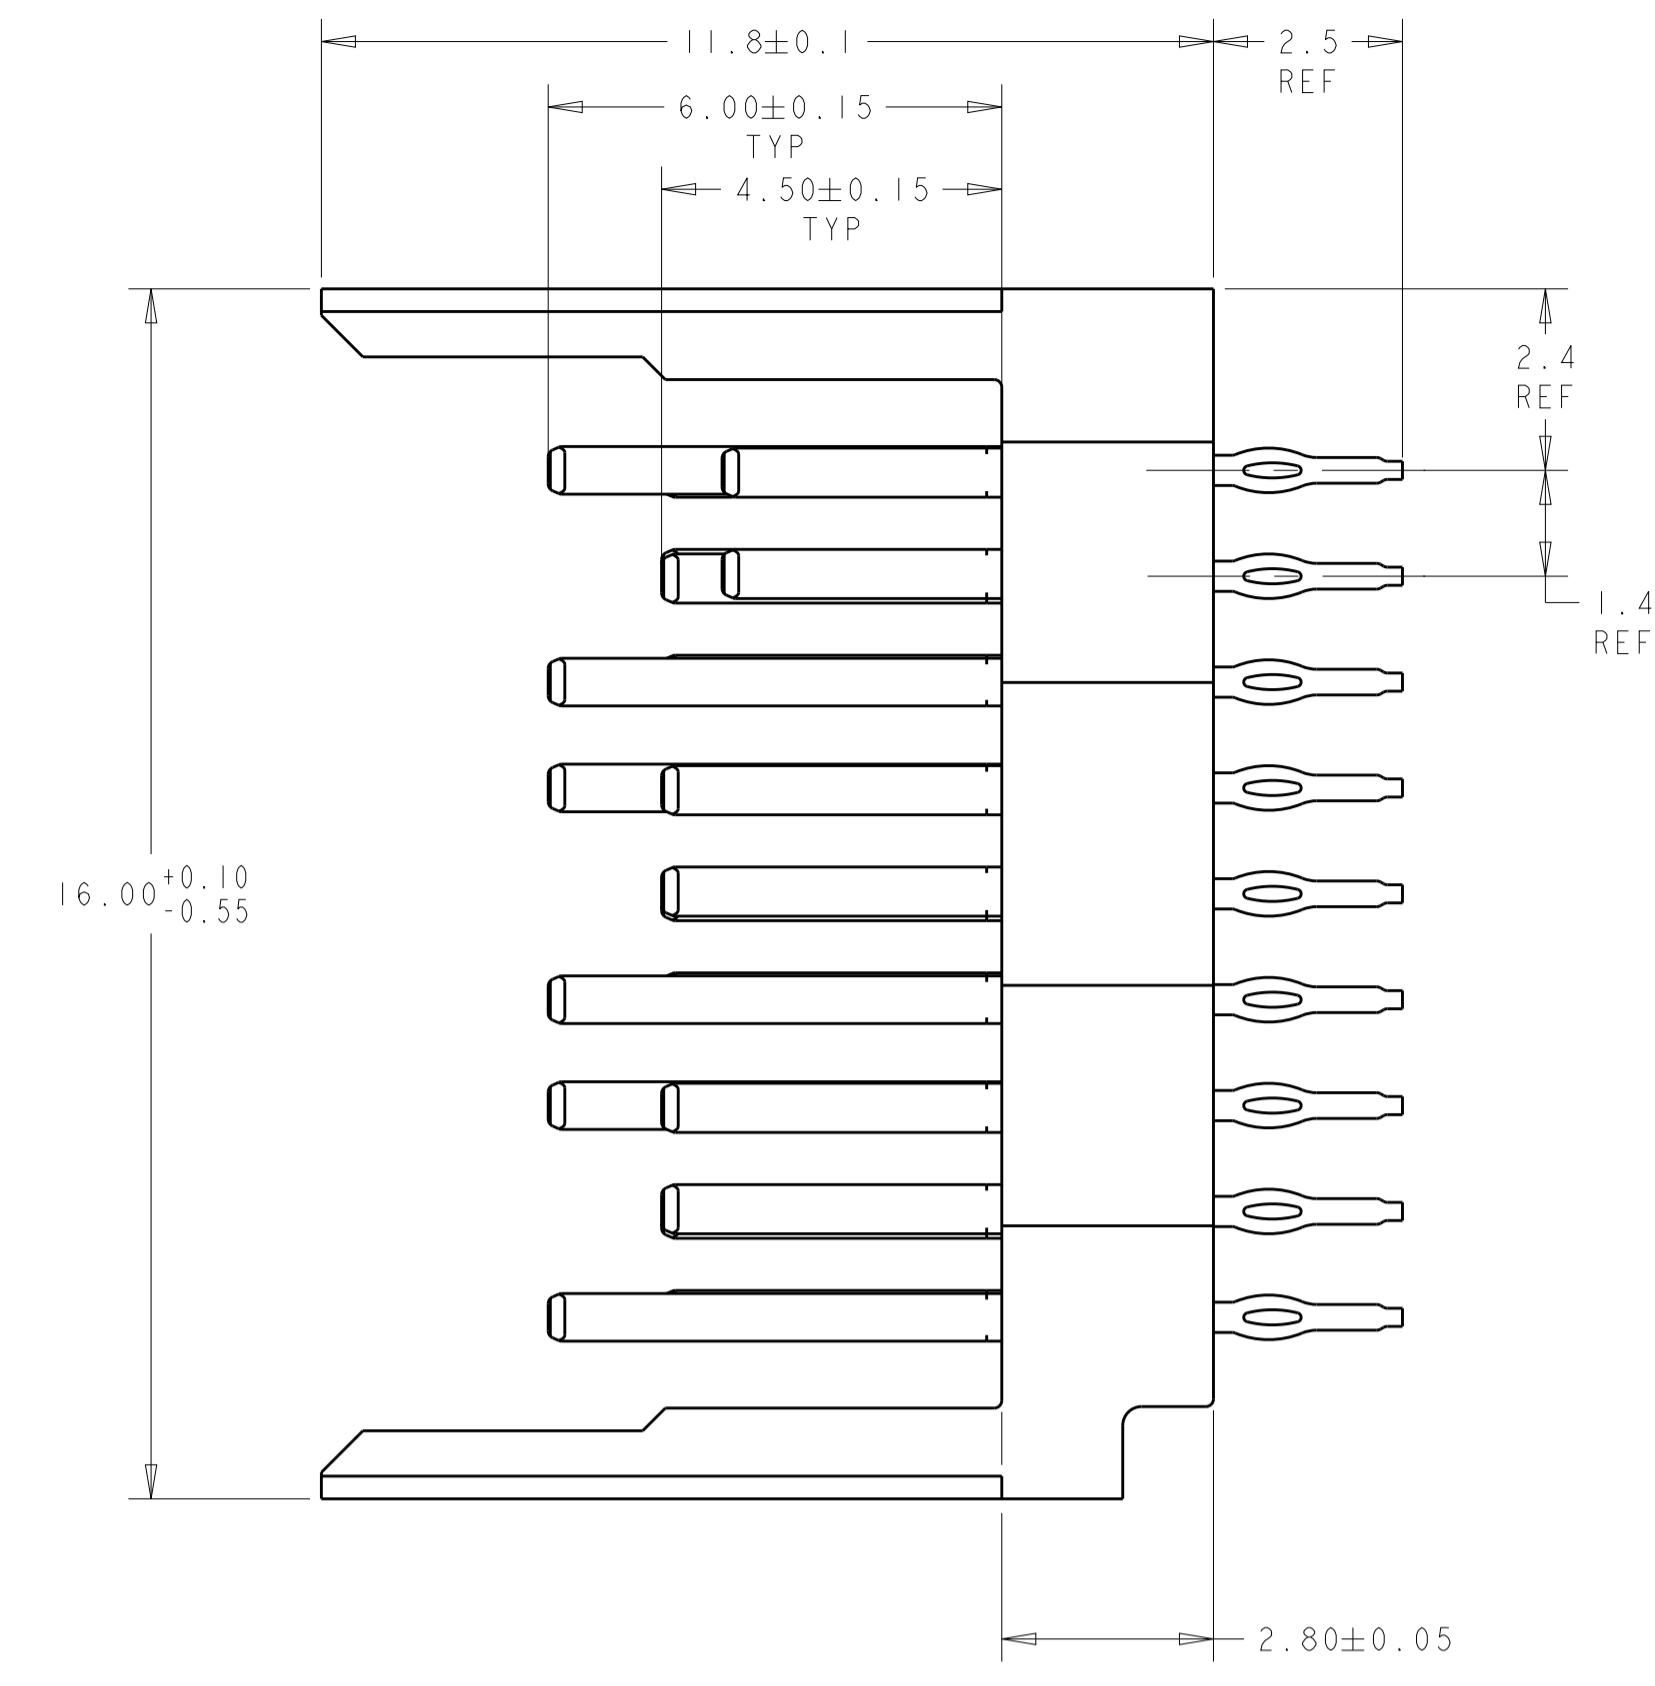


LOC	DIST	REVISIONS					
		P	LTN	DESCRIPTION	DATE	DWN	APVD
AD	00	D		REVISED PER ECO-13-002460	15FEB2013	KH	RP
		E		REVISED PER ECO-19-012987	04SEP2019	AP	SY


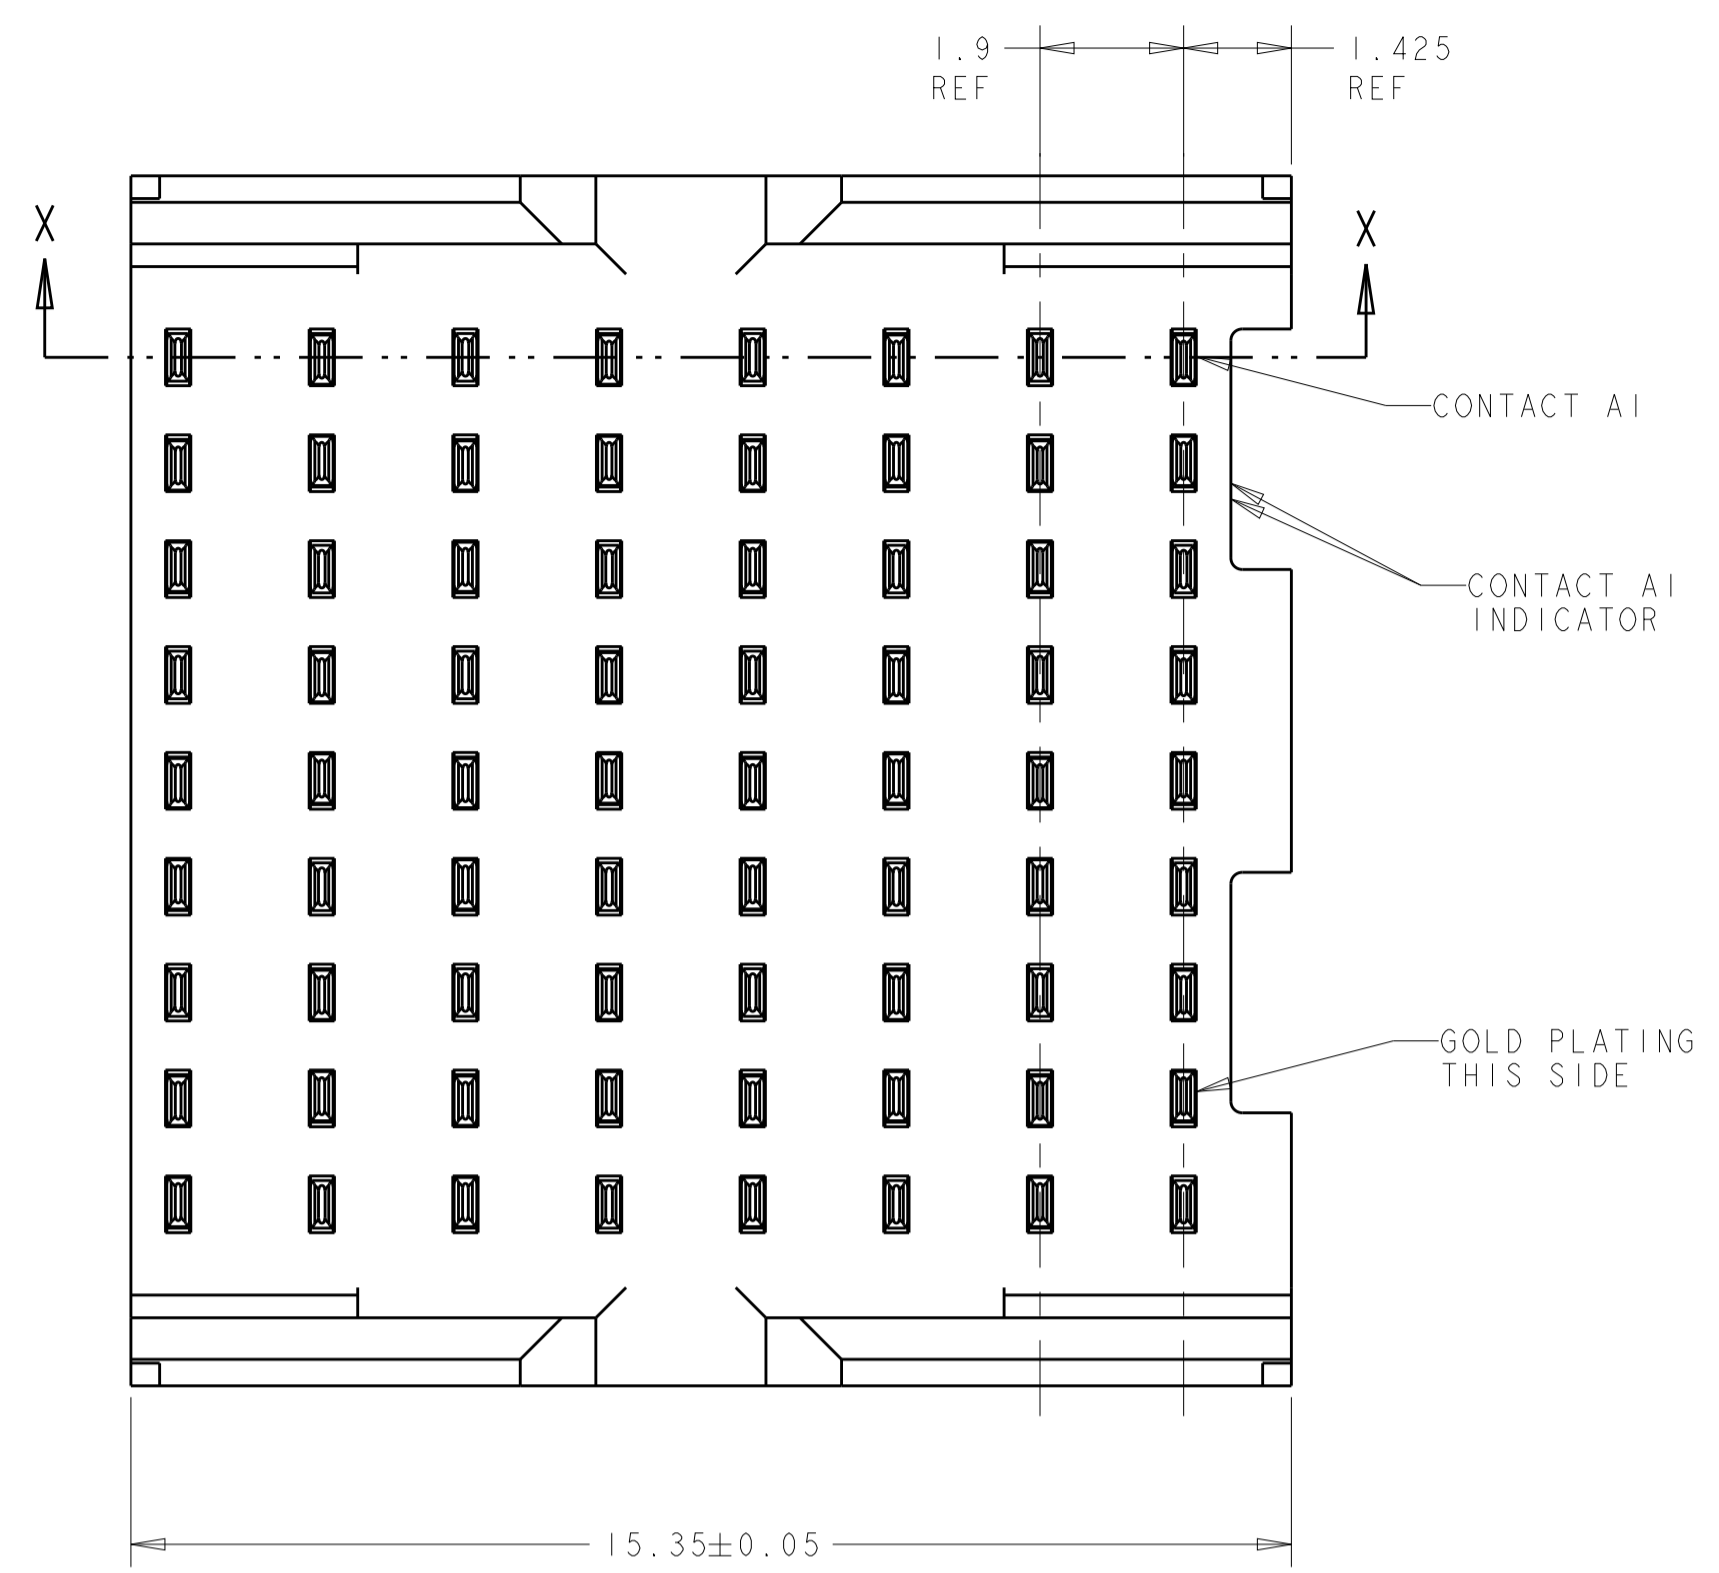


- 1 MATERIAL:
CONTACT - PHOS BRONZE
HOUSING - LCP, UL 94V-0, COLOR - BLACK
- 2 FINISH:
CONTACT AREA FINISH CONFORMS TO THE REQUIREMENTS OF TE PRODUCT SPECIFICATION 108-2303; BASED ON TELCORDIA GR-1217-CORE FOR SYSTEM QUALITY LEVEL III APPLICATIONS IN CONTROLLED ENVIRONMENTS (CENTRAL OFFICE).
COMPLIANT PIN AREA-0.5µm MIN BRIGHT TIN-LEAD OVER 1.27µm MIN NICKEL.
- 3 CONNECTOR MARKED WITH PART NUMBER, DATE CODE, MANUFACTURING BUILDING CODE AND STANDARD IN APPROXIMATE AREA SHOWN
- 4 DATUMS AND BASIC DIMENSIONS ESTABLISHED BY CUSTOMER.
- 5 CONTACT AREA LUBRICATED WITH BELLCORE APPROVED LUBRICANT. TECHNICAL REFERENCE GR-1217-CORE, ISSUE 1, NOVEMBER 1995.
- 6 REFERENCE APPLICATION SPEC 114-13202 FOR RECOMMENDED PLATED THRU HOLE DIAMETER AND PLATING THICKNESSES.
- 7 FINISH: CONTACT
MATING AREA - 0.76µm MIN GOLD OVER 1.27µm MIN NICKEL
COMPLIANT PIN AREA - 0.5µm MATTE TIN OVER 1.27µm MIN NICKEL
- 8 SHOWN LOGO OR OTHER TE OWNED LOGOS IN APPROXIMATE AREA

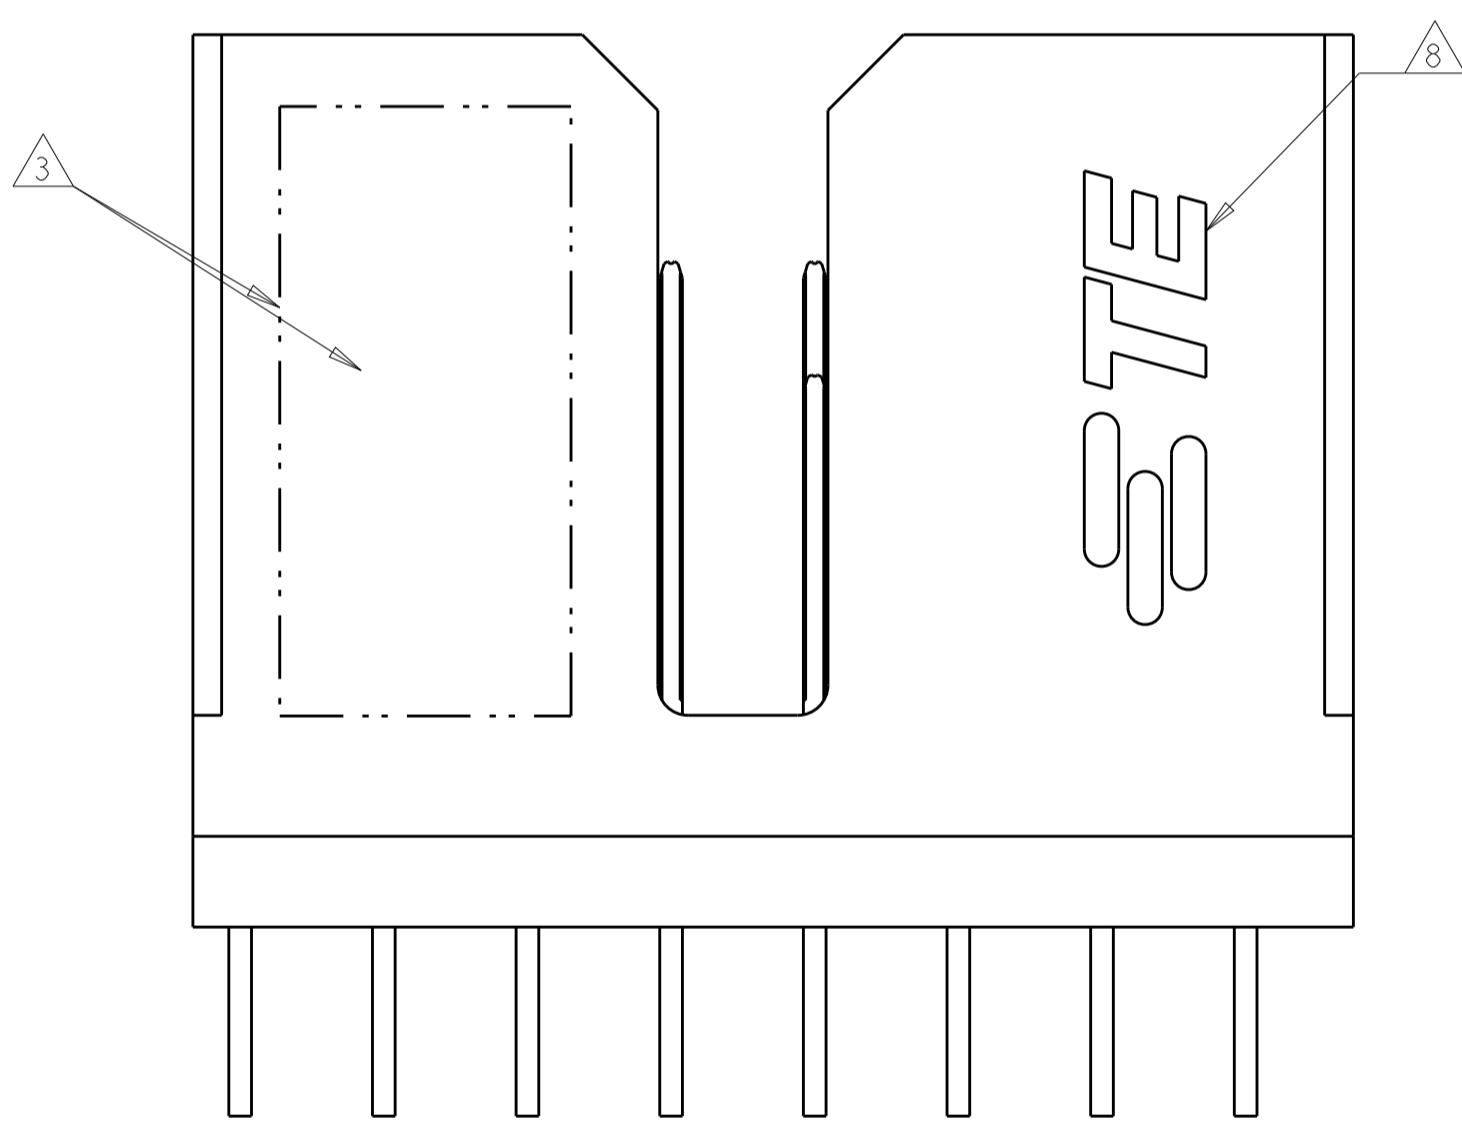

CONTACT LAYOUT
 A = 4.50mm (DIM M)
 B = 3.70mm (DIM M)
 G = GROUND 6.00mm

ROWS	COLUMNS							
	8	7	6	5	4	3	2	1
A	G	A	G	A	G	A	G	B
B	A	A	A	A	A	A	A	B
C	A	G	A	G	A	G	A	G
D	G	A	G	A	G	A	G	A
E	A	A	A	A	A	A	A	A
F	A	G	A	G	A	G	A	G
G	G	A	G	A	G	A	G	A
H	B	A	A	A	A	A	A	A
I	B	G	A	G	A	G	A	G

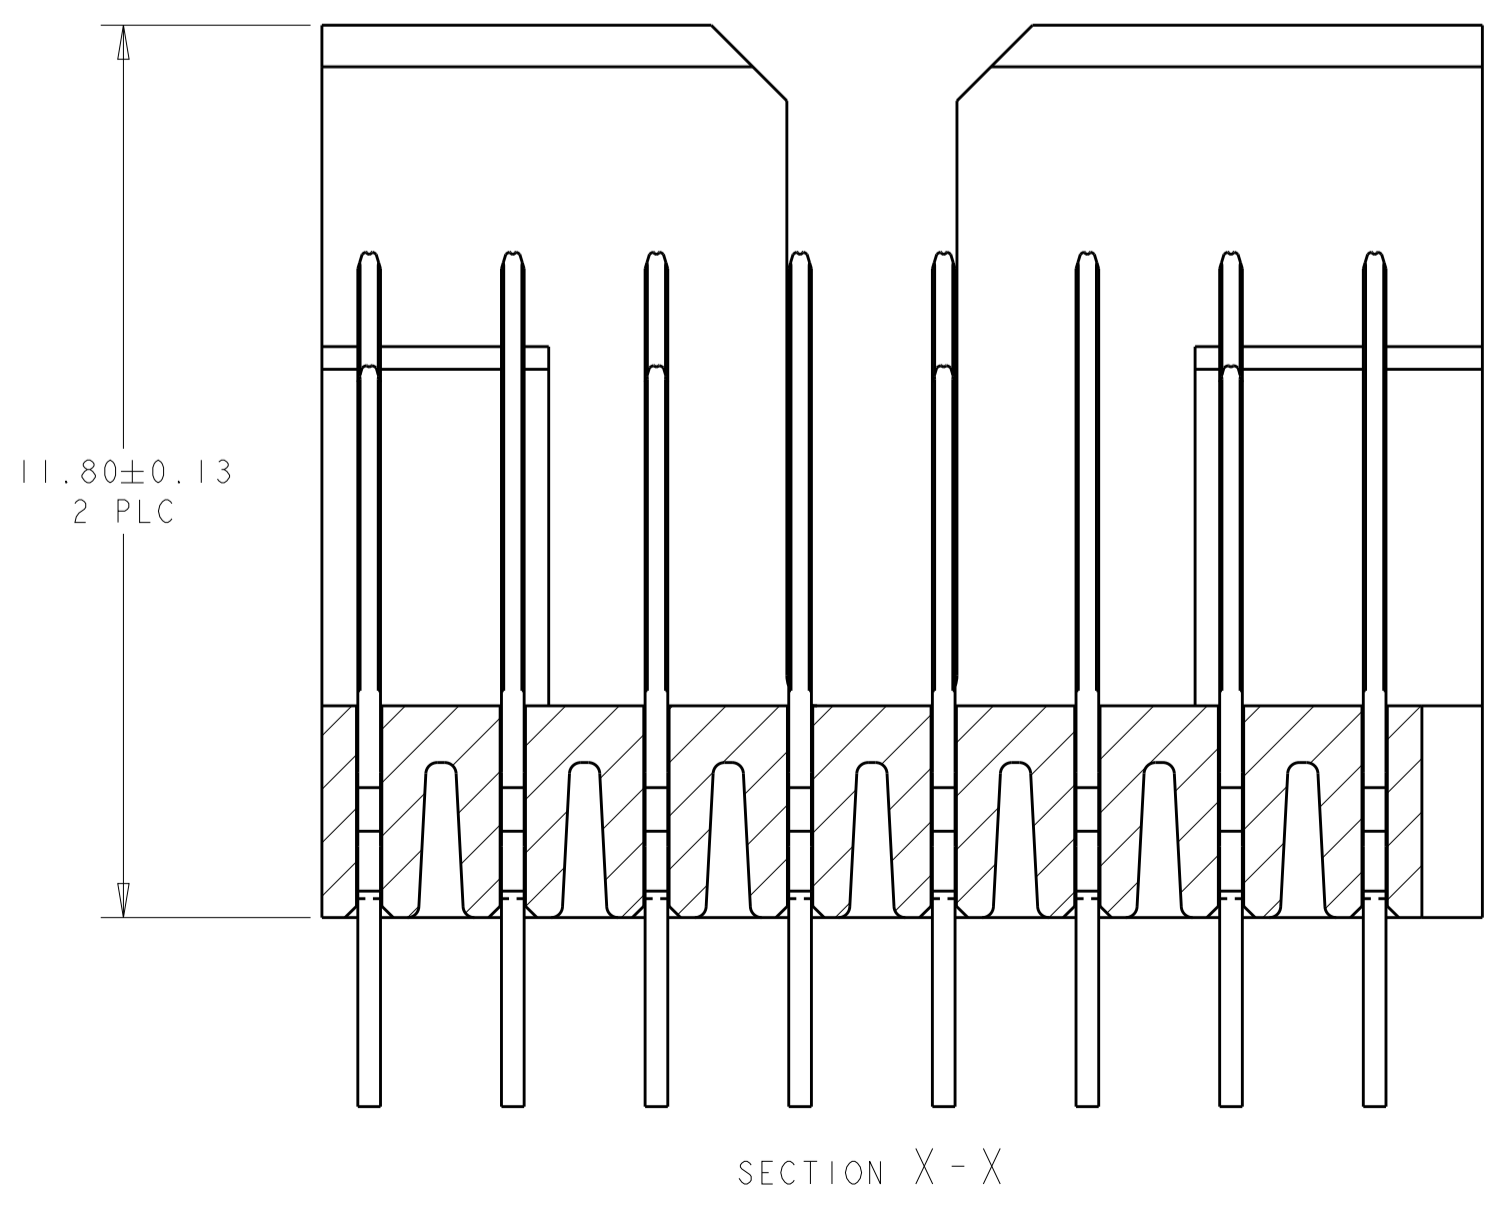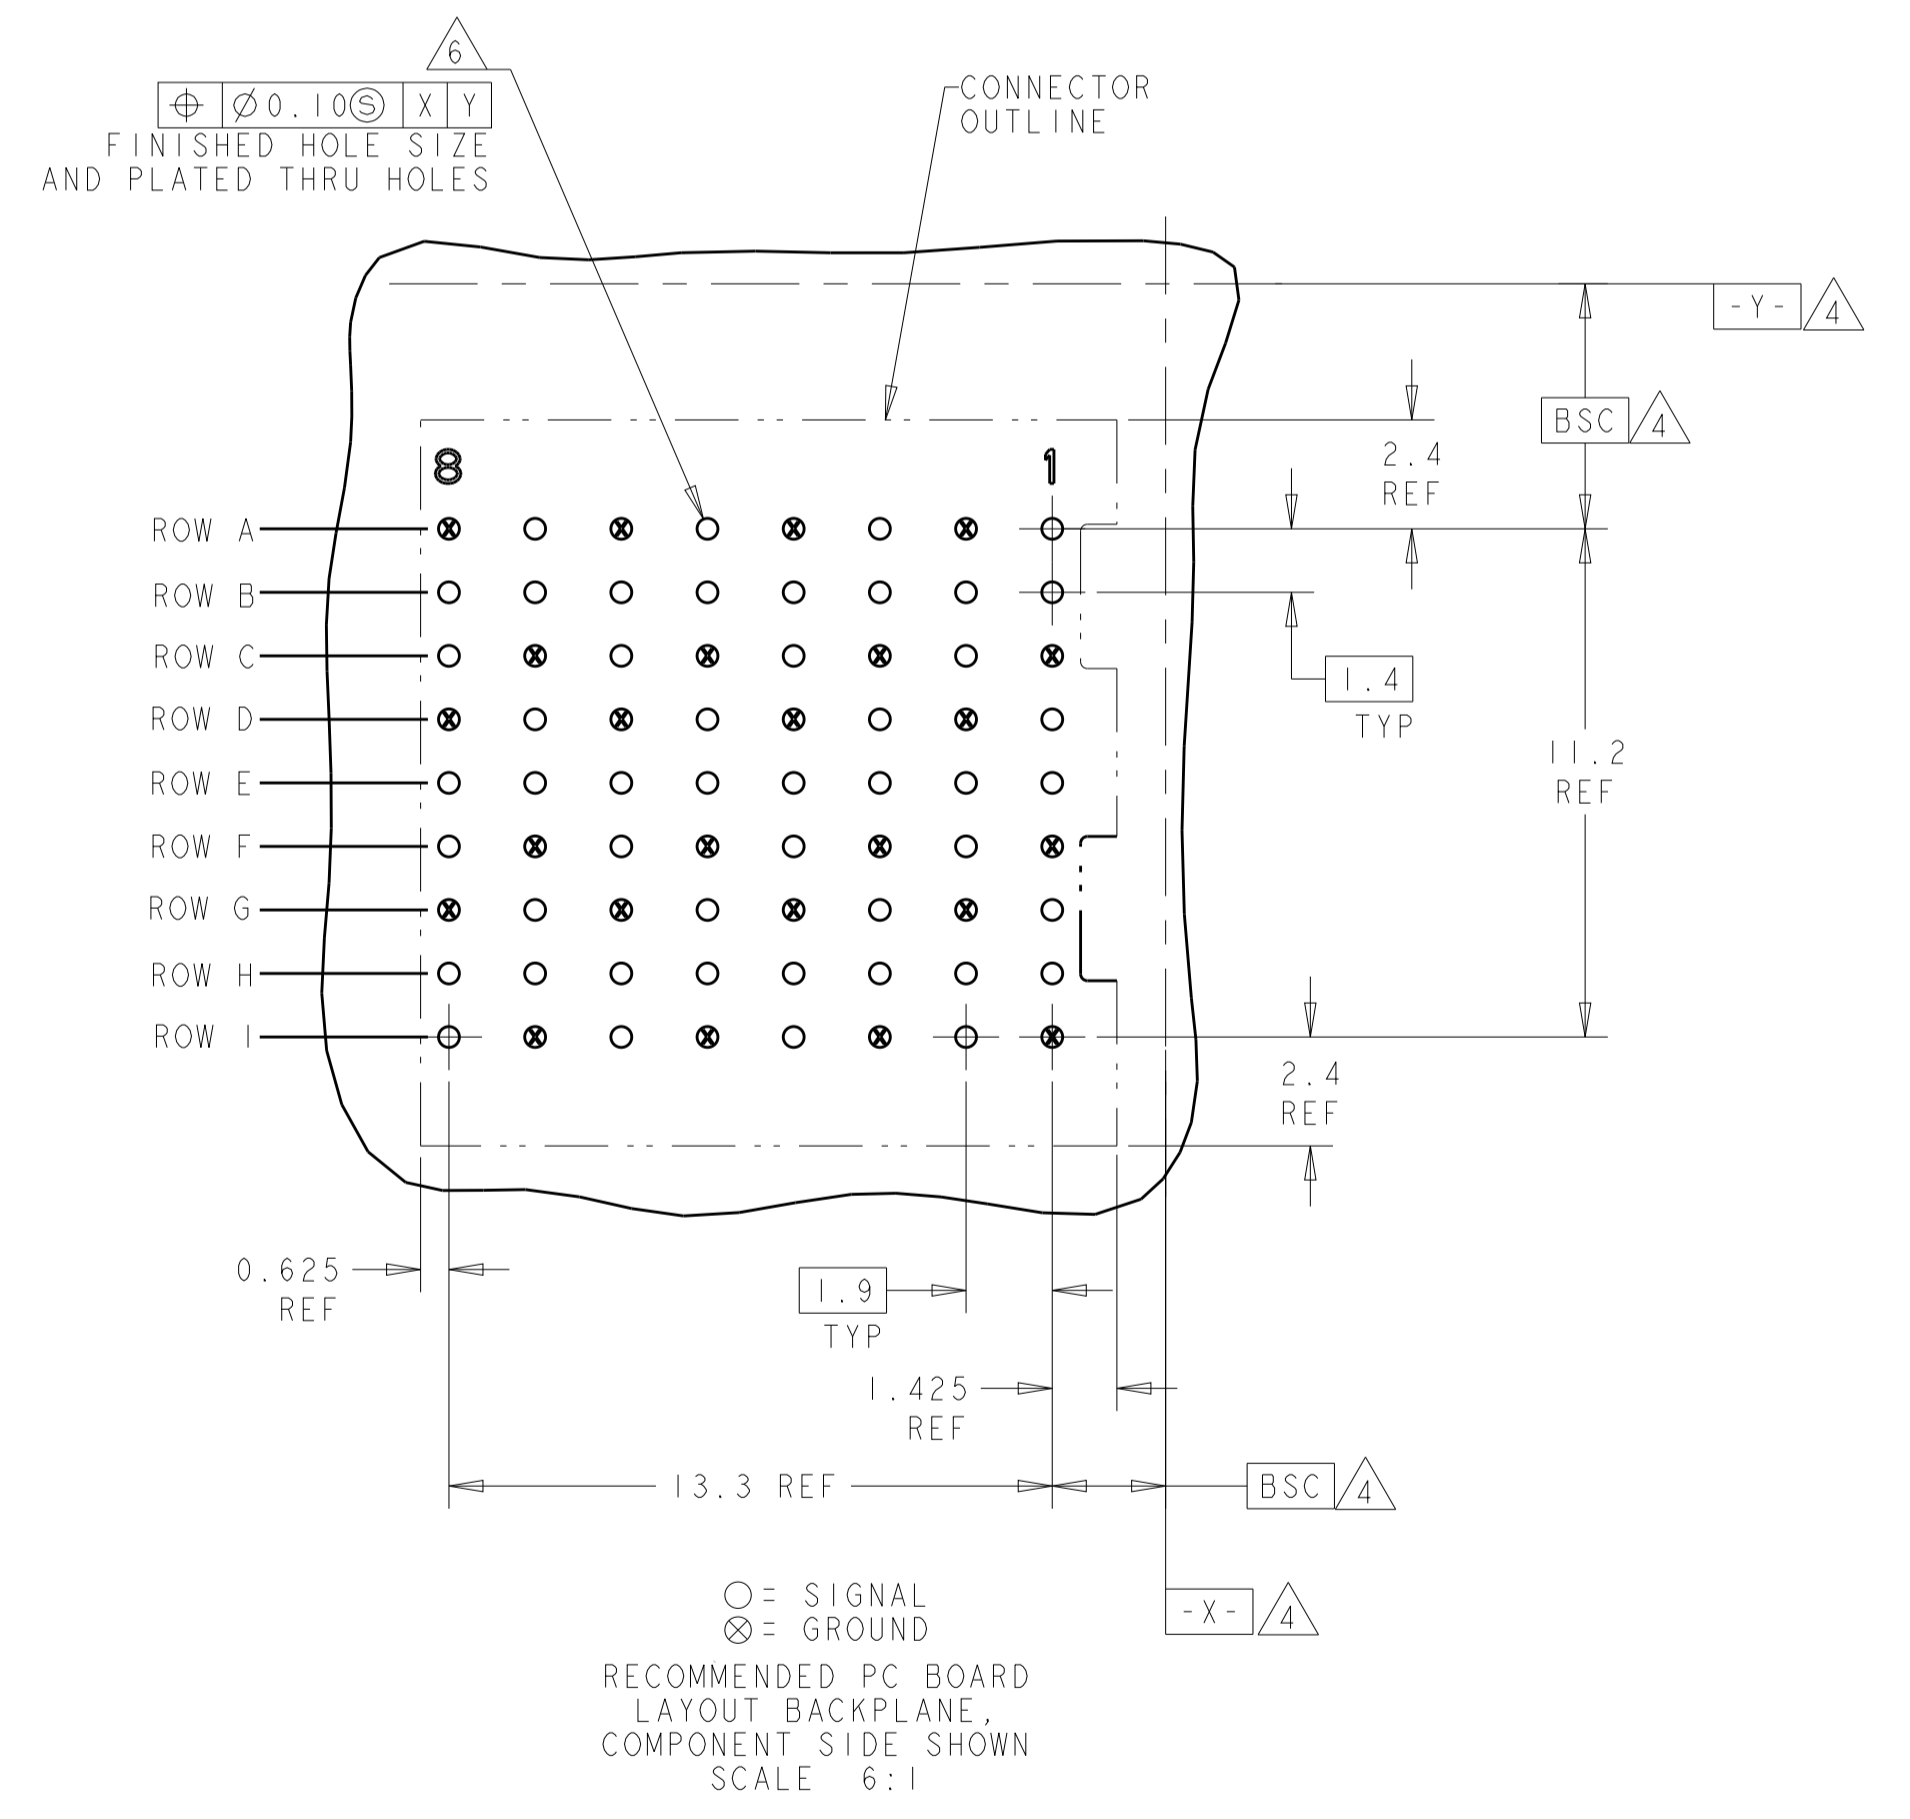

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:	TOLERANCES UNLESS OTHERWISE SPECIFIED:	DWN B. CARBO 07JAN2010	CHK R. PATTERSON 07JAN2010	APVD R. PATTERSON 07JAN2010	NAME
mm	0 PLC ±	PRODUCT SPEC			TE Connectivity
	1 PLC ±	APPLICATION SPEC			HEADER ASSEMBLY, OPEN ENDED, 3 PAIR, 8 COLUMN TinMan
	2 PLC ±	SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
	3 PLC ±	A100779	C=2065915	SCALE 10:1	SHEET 1 OF 1 REV E
	4 PLC ±	Customer Drawing			
	ANGLES				
	FINISH				