





ISSUE NUMBER	
ORIGINAL	(1)

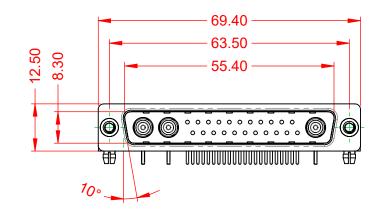




NOTES:

MATERIAL: HOUSING: SHELL: CONTACT:

THERMOPLASTIC POLYESTER, UL94V-0 STEEL, NICKEL PLATED COPPER ALLOY, GOLD FLASH PLATED



POWER/CO-AX CONTACT RATING: (IF PRESENT) SIGNAL CONTACT CURRENT RATING: 5A PER CONTACT SIGNAL CONTACT RESISTANCE: $10m\Omega$ MAX. **INSULATOR RESISTANCE:** 5000MΩ min.

.XX ±0.13 .XXX ±0.05


DIELECTRIC WITHSTANDING VOLTAGE:

OPERATING TEMPERATURE:

50Ω (IMPEDANCE)

-55°C ~ 125°C

1000V AC rms



				SW REFERENCE NO.: 629 COMBO ASSEMBLY		
COMBINA	COMBINATION D-SUB		DATE: JAN. 01/20	19		
			DATE:			
EDAC INC	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF EDAC INC.,AND	SCALE: (IN C.A.D. 1:1)	SHEET 1 OF	2		
TORONTO, ONT CANADA	OR USED AS THE BASIS FOR THE	DRAWING NUMBER: 629-25W	3240-5N3	ISSUE		
YOUR CONNECTION TO QUALITY & SERV	CE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.	PART NUMBER: 629-25W	3240-5N3	1		





THIS SERIES FULLY CONFORMS TO THE EUROPEAN UNION DIRECTIVES 2011/65/EU FOR RoHS COMPLIANCY.

