


**SF2271C**

**460 MHz  
SAW Filter**



**SM5050-8**

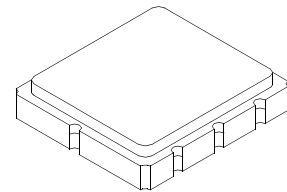

- *Low Insertion Loss SAW Filter*
- *5.0 x 5.0 mm Surface-mount Case*
- *Direct 50 ohm Operation*
- *Complies with Directive 2002/95/EC (RoHS)*

**Absolute Maximum Ratings**

Rating	Value	Units
Maximum Incident Power in Passband	+10	dBm
Maximum DC Voltage on any Non-ground Terminal	3	V
Operating Temperature	-40 to + 85	°C
Storage Temperature Range in Tape and Reel	-40 to + 85	°C
Maximum Soldering Profile	265 °C for 10 s	

**Electrical Characteristics**


Characteristic	Sym	Notes	Min	Typ	Max	Units
Center Frequency	$f_C$			460		MHz
Minimum Insertion Loss	$IL_{MIN}$			1.5	2.8	dB
2 dB Bandwidth	$BW_2$		20	23.4		MHz
Rejection Referenced to 0 dB:						dB
$f_C-45$ to $f_C-100$ MHz			40	56		
$f_C+45$ to $f_C+55$ MHz			30	56		
$f_C+55$ to $f_C+100$ MHz			40	54		
Frequency Temperature Coefficient	FTC			-36		ppm/°C
Source Impedance				50		ohms
Load Impedance				50		ohms
Case Style			SM5050-8 5 x 5 mm Nominal Footprint			
Lid Symbolization (Y=year, WW=week, S=shift) See note 4			A19			

 **CAUTION: Electrostatic Sensitive Device. Observe precautions for handling.**


**NOTES:**

1. The design, manufacturing process, and specifications of this device are subject to change.
2. US or International patents may apply.

# Filter Transition Bandwidth Plot

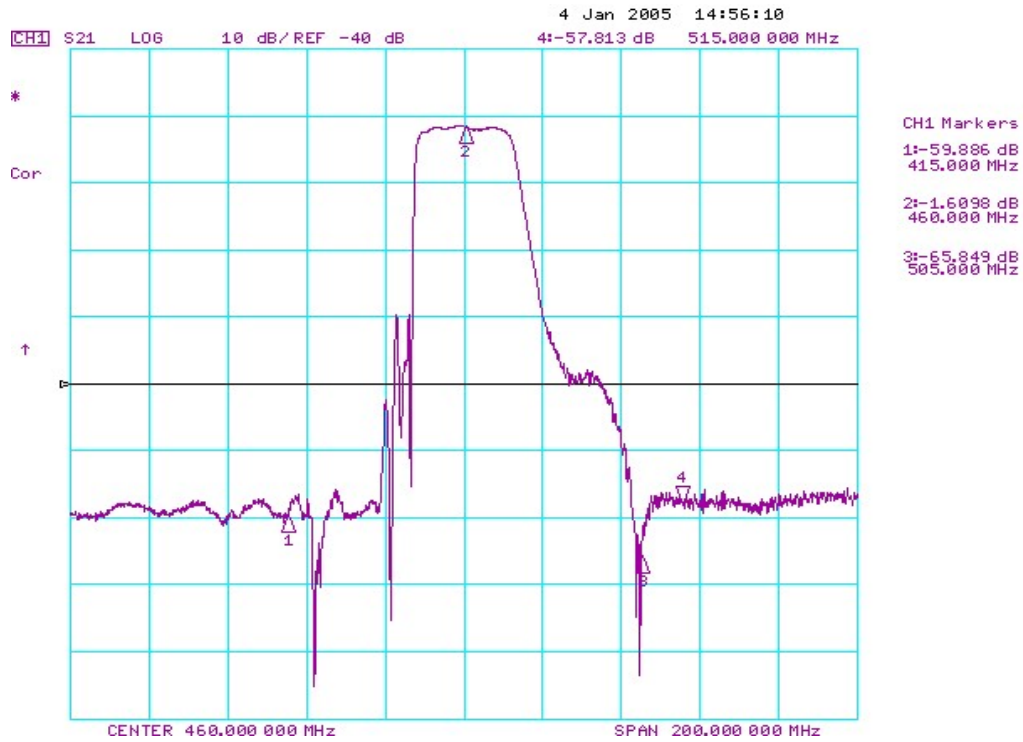


# Filter Passband Plot

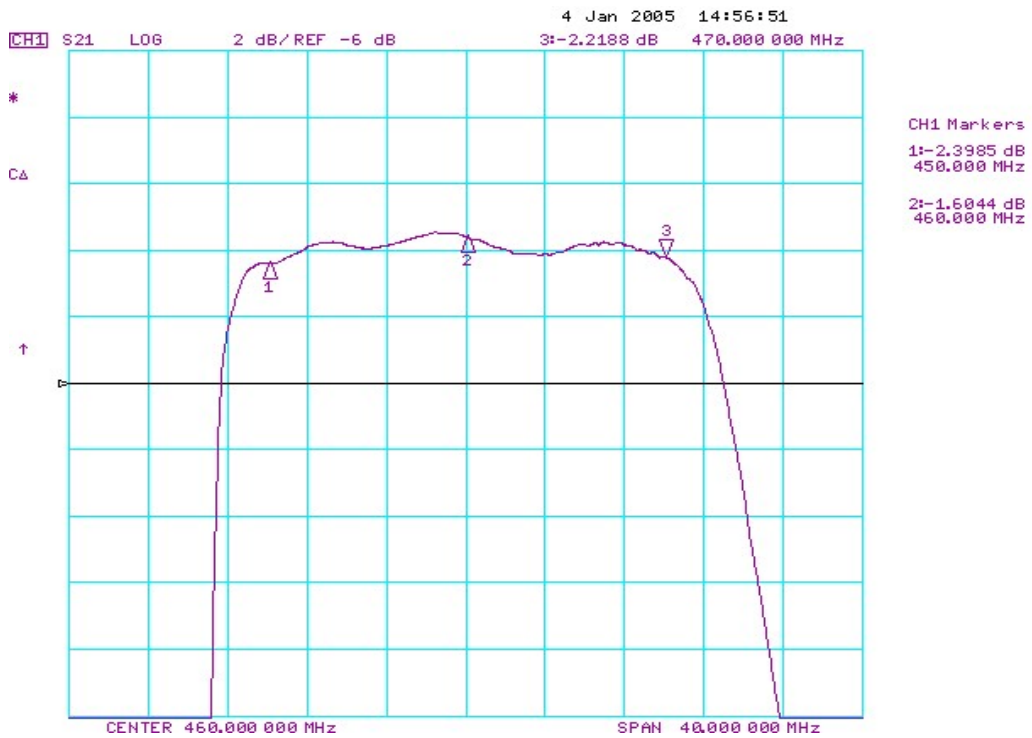

# SM5050-8 Surface-Mount 8-Terminal Ceramic Case 5.0 X 5.0 mm Nominal Footprint

## Case Dimensions

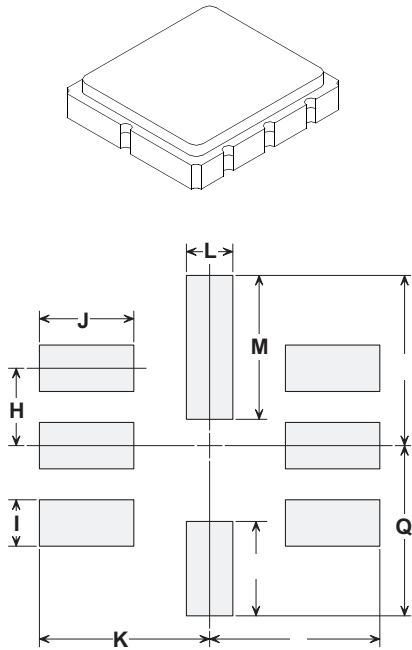

**PCB Footprint**

Dimension	mm			Inches		
	Min	Nom	Max	Min	Nom	Max
<b>A</b>	4.80	5.00	5.20	0.189	0.197	0.205
<b>B</b>	4.80	5.00	5.20	0.189	0.197	0.205
<b>C</b>	1.30	1.50	1.70	0.050	0.060	0.067
<b>D</b>	1.98	2.08	2.18	0.078	0.082	0.086
<b>E</b>	1.07	1.17	1.27	0.042	0.046	0.050
<b>F</b>	0.50	0.64	0.70	0.020	0.025	0.028
<b>G</b>	2.39	2.54	2.69	0.094	0.100	0.106
<b>H</b>		1.27			0.050	
<b>I</b>		0.76			0.030	
<b>J</b>		1.55			0.061	
<b>K</b>		2.79			0.110	
<b>L</b>		0.76			0.030	
<b>M</b>		2.36			0.093	
<b>N</b>		1.55			0.061	
<b>O</b>		2.79			0.110	
<b>P</b>		2.79			0.110	
<b>Q</b>		2.79			0.110	


## Case Materials

Materials	
Solder Pad Plating	0.3 to 1.0 $\mu\text{m}$ Gold over 1.27 to 8.89 $\mu\text{m}$ Nickel
Lid Plating	2.0 to 3.0 $\mu\text{m}$ Nickel
Body	$\text{Al}_2\text{O}_3$ Ceramic
	Pb Free

## Electrical Connections


Connection		Terminals
Port 1	Input	2
Port 2	Output	6
	Ground	All others

Dot indicates Pin 1

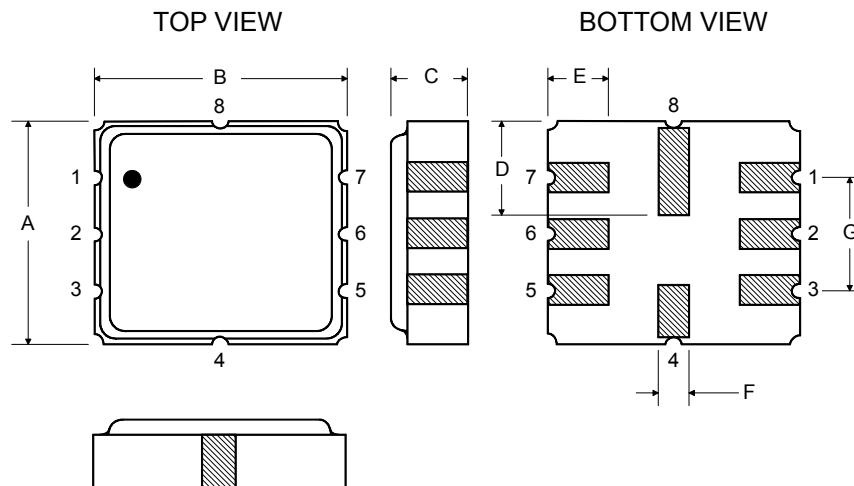

## Tape and Reel Specifications



Tape and Reel Standard per ANSI/EIA-481

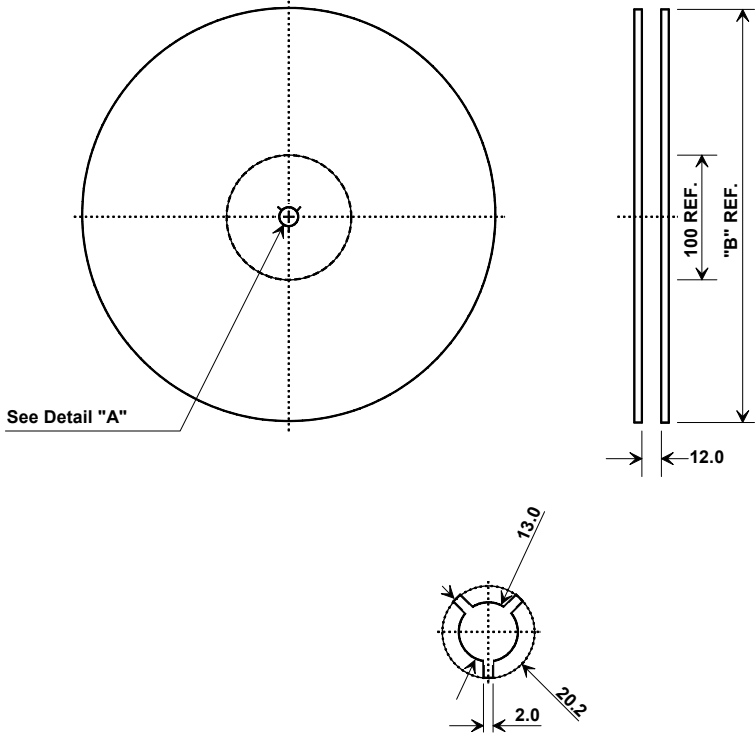

"B"		Quantity Per Reel
Nominal Size		
Inches	millimeters	
7	178	500
13	330	3000

### COMPONENT ORIENTATION and DIMENSIONS

Carrier Tape Dimensions	
Ao	5.3 mm
Bo	5.3 mm
Ko	2.0 mm
Pitch	8.0 mm
W	12.0 mm

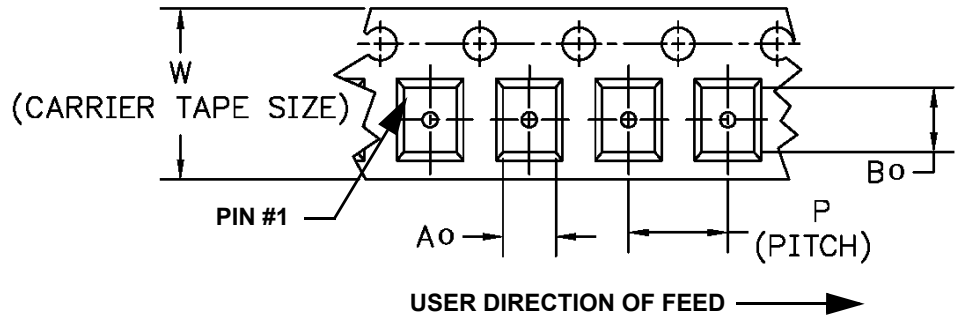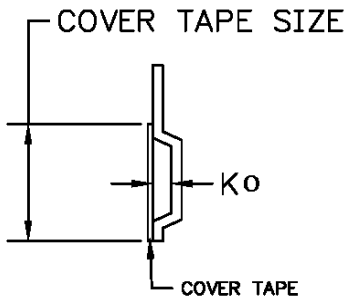

## Recommended Reflow Profile

1. Preheating shall be fixed at 150~180°C for 60~90 seconds.
2. Ascending time to preheating temperature 150°C shall be 30 seconds min.
3. Heating shall be fixed at 220°C for 50~80 seconds and at 260°C +0/-5°C peak (10 seconds).
4. Time: 5 times maximum.

