

ITEM	PART#	DESCRIPTION	QTY	UOM
A	39014033	MiniFitJrPIg SR PnlMnt V-0 3Ckt	1	PC
B	39000124	MiniFit Term Crp Male C Bs Tin 16awg	3	PC
C	--	PAPER PRINTED PAPER WHITE	1	PC

FROM	TO	DESCRIPTION	COLOR
A1	--	1X16AWG DISC PVC BK UL1015 HOOKUP	BLACK
A2	--	1X16AWG DISC PVC BK UL1015 HOOKUP	BLACK
A3	--	1X16AWG DISC PVC BK UL1015 HOOKUP	BLACK

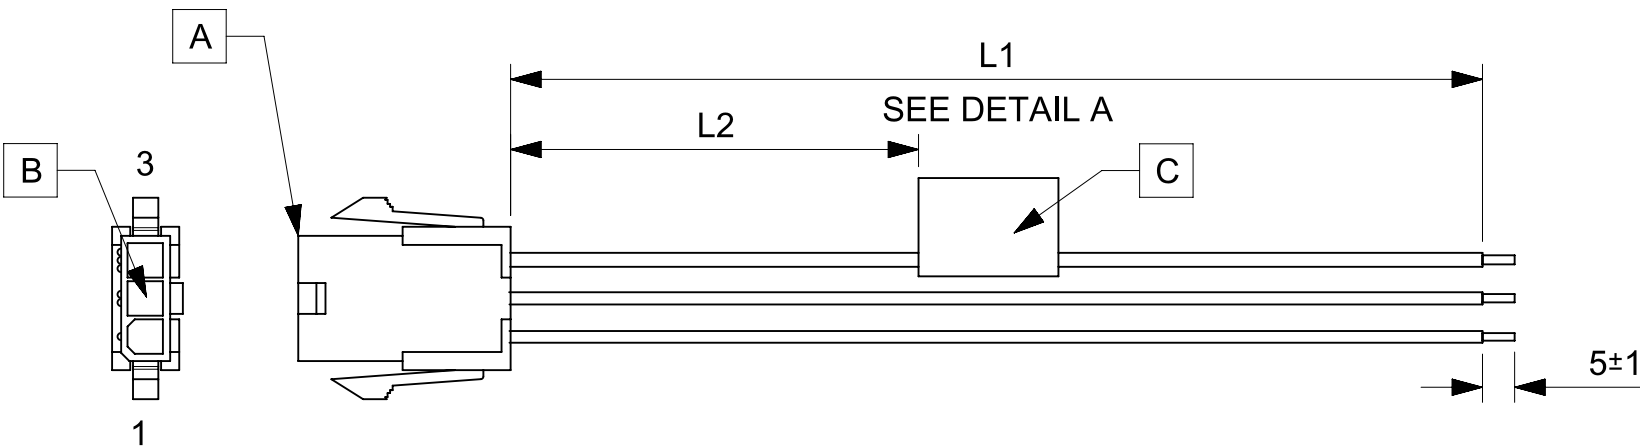


TABLE			
PART NUMBER	L1	L2	TITLE
2153231031	150±8	63 REF	MINIFIT JR SR M-S 3 CIRCUIT 150MM Sn
2153231032	300±10	138 REF	MINIFIT JR SR M-S 3 CIRCUIT 300MM Sn
2153231033	600±10	288 REF	MINIFIT JR SR M-S 3 CIRCUIT 600MM Sn

NOTES

- Connector view shown is from mating side.
- Free ends must be stripped, twisted & tinned. The length of tinning is 5±1mm. Tinning dia must be 1.8mm Max.
- Label text must be 2mm max. in height with Arial font.
- Label must be wrapped in Flag type on a single cable.

MOLEX P/N
MOLEX
BATCH WK/YR

DETAIL A

REVISION			
DATE	REV	DESCRIPTION	CHANGER
2020/03/23	A	INITIAL RELEASE	ARAJU

FUNCTIONAL SYMBOLS FA = 0 FE = 0 FP = 0	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION		CURRENT REV DESC:		<p>SEE TABLE</p>		
	DIMENSION UNITS	SCALE	GENERAL TOLERANCES (UNLESS SPECIFIED)				
	mm	NTS	ANGULAR TOL ± °				
	4 PLACES ±		EC NO: 638380				
DIVISIONAL SYMBOLS	3 PLACES ±		DRWN: AS20 2020/04/06		<p>PRODUCT CUSTOMER DRAWING</p> <p>DOCUMENT NUMBER: 2153231031</p> <p>DOC TYPE: PSD</p> <p>DOC PART: 000</p> <p>REVISION: A</p>		
	2 PLACES ±		CHK'D: RDESAI01 2020/05/28				
	1 PLACE ±		APPR: RDESAI01 2020/05/28				
	0 PLACES ±		INITIAL REVISION: DRWN: AS20 2020/04/06				
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		THIRD ANGLE PROJECTION	DRAWING	SERIES	MATERIAL NUMBER	CUSTOMER	SHEET NUMBER
			A4-SIZE	215323	SEE TABLE	GENERAL MARKET	1 OF 1