

1

2

3

4

5




6

7

A

4,98

6,47

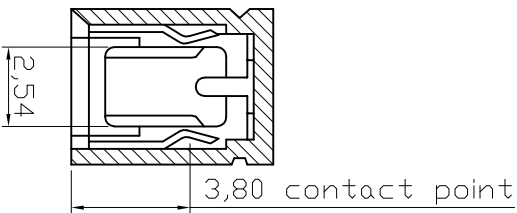


NOTES:

- 1. Insulation: Glass Filled PBT, UL94V-0, Color Black/Red/Blue
- 2. Contact : Phosphor Bronze
- 3. Current Rating: 3A Max
- 4. Dielectric Voltage: 1000V rms / 1 minute
- 5. Insulation Resistance: 1000M ohm Min.
- 6. Contact Resistance: 30m ohm Max.
- 7. Operating and Storage Temperature: -40°C ~ +105°C
- 8. Mating Cycles: 10 Min.

- ④ Contact Area Plating:
 - G: Gold Flash
 - Z: Tinned
- ② Insulation color:
 - BLACK: Black
 - BLUE: Blue
 - RED: Red

AKSCT/x x



D

E

F

ROHS compliant

Unit:mm

Scale	Free					
TOLERANCE						
.X	±0.38	④	Update	07.06.2013	Winnie	Drawn
.XX	±0.25	④	Update	21.11.2012	Any	Approved
.XXX	±0.13	④	Update	27.07.2009	Rate	
DIM	TOL	②	Update	10.04.2002	Hellwig	
X. °	±1°	①	Drawn			
Angle	TOL					
UNIT	mm	Id.	Modification	Date	Name	

Customer-No.

ASSMANN WSW-No.

AKSCT/G X
AKSCT/Z X

Drawing-No.

ASS 0591 CO

rev04

Replace

SHEET

G

F

E

D

C

B

A

1

2

3

4

5

6

7

H

H

