

TOLERANCE UNLESS OTHERWISE SPECIFIED DO NOT MAKE MANUAL REVISIONS TO MASTER.

ISSUE NUMBER	
ORIGINAL	(1)

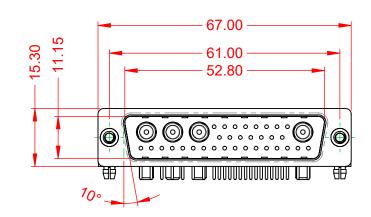




.X ±0.25 .XX ±0.13 .XXX ±0.05

NOTES:


MATERIAL: HOUSING: SHELL: CONTACT:

WITHSTANDING VOLTAGE:

THERMOPLASTIC POLYESTER, UL94V-0 STEEL, NICKEL PLATED COPPER ALLOY, 30µ" GOLD PLATED




OPERATING TEMPERATURE:	-55°C ~ 125°C
POWER/CO-AX CONTACT RATING: (IF PRESENT)	40A (CURRENT)
SIGNAL CONTACT CURRENT RATING: SIGNAL CONTACT RESISTANCE:	5A PER CONTACT 10mΩ MAX.
INSULATOR RESISTANCE: DIELECTRIC	$5000M\Omega$ min.



				SW REFERENCE NO.: 629 COMBO ASSEMBLY			
	COMBINATION D-SUB		COMBINATION D-SUB DRAWN: C.B			DATE: JAN. 01/2019	
			CHECKED:		DATE:		
	EDAC INC	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF EDAC INCAND	SCALE: (IN C.A.D. 1:1	1)	SHEET 1 OF	2	
	YOUR CONNECTION TO QUALITY & SERVICE	MANUFACTURE OR SALE OF APPARATUS	DRAWING NUMBER: 629-36W4		4640-4N3	ISSUE	
YOUR CONNECTION TO			PART NUMBER:	629-36W4	4640-4N3	1	

1000V AC rms





THIS SERIES FULLY CONFORMS TO THE EUROPEAN UNION DIRECTIVES 2011/65/EU FOR RoHS COMPLIANCY.

