

MATERIALS AND FINISHES

MCX PLUG CONNECTOR:  
SEE SD-73415-519

BODY: ZINC ALLOY  
PLATED NICKEL

CENTER CONTACT: BRASS  
PLATED GOLD

INSULATOR: PTFE

OUTER CONTACT: BERYLLIUM COPPER  
PLATED GOLD

CRIMP TUBE: BRASS  
PLATED NICKEL

CAP: STAINLESS STEEL  
PASSIVATED

SHRINK TUBE: POLYOLEFIN BLACK

CABLE : RG179/U OR EQUIVALENT

NOTE: PACKAGING BY PLASTIC BAG

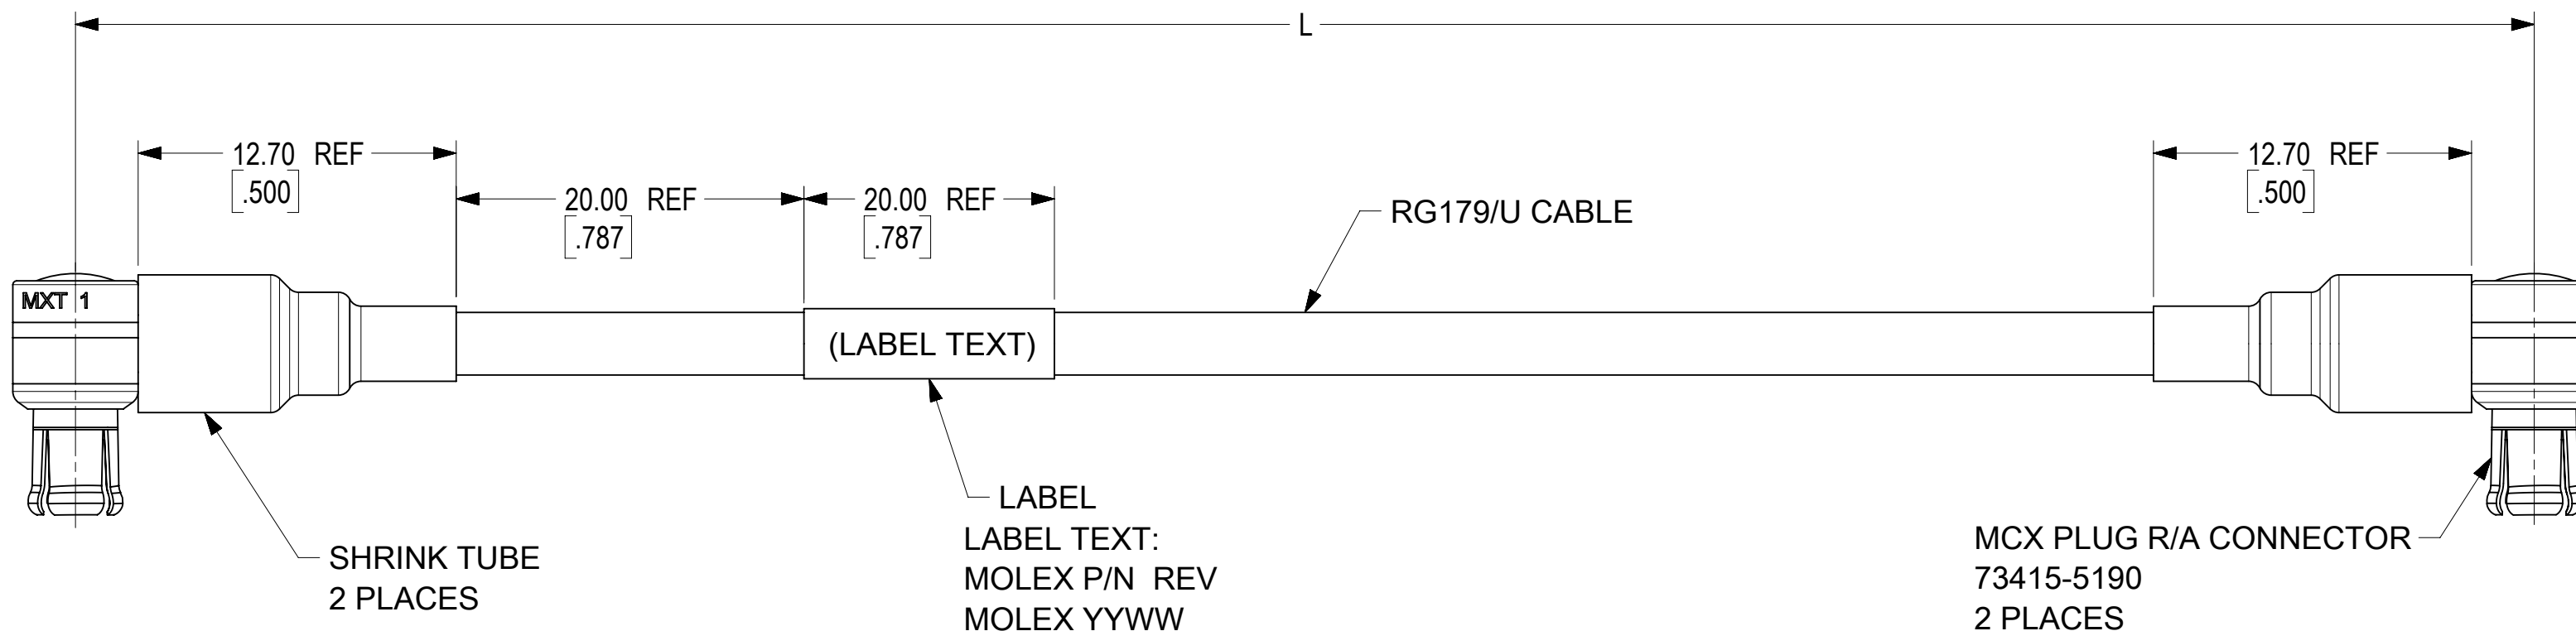
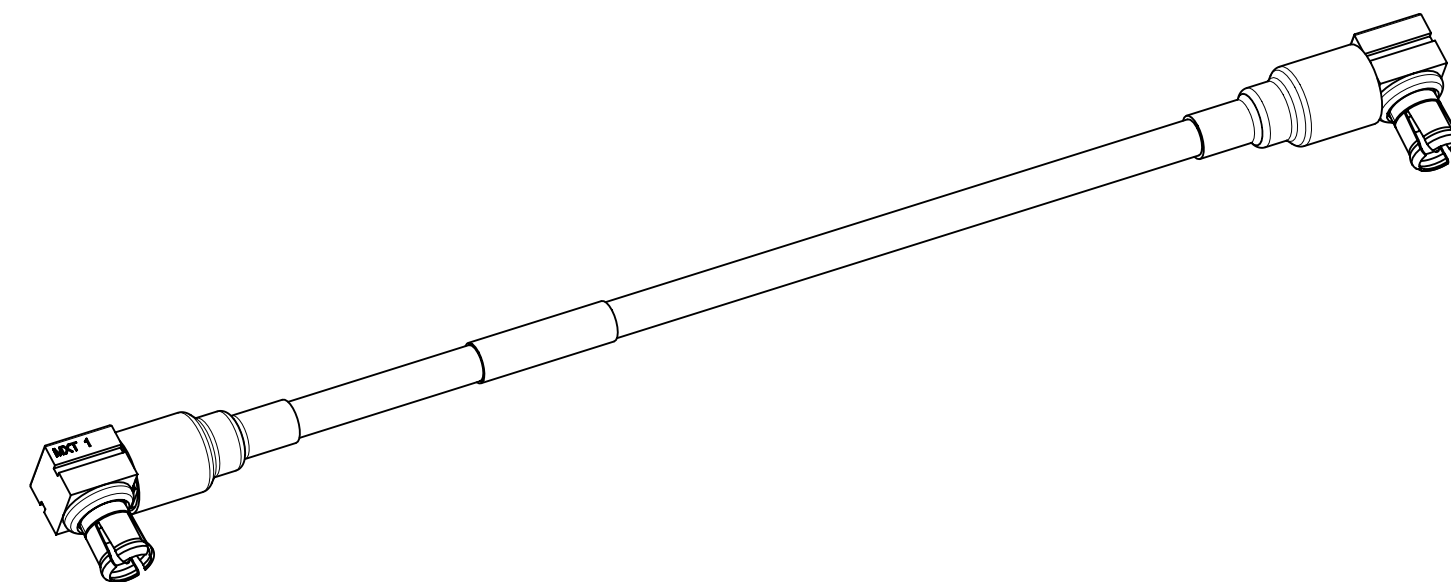


TABLE 1:

CECC 22220	MCX INTERFACE
SPECIFICATION	DESCRIPTION

TABLE 2:

73230-5332	12.000±.394	304.80±10.00
73230-5331	8.000±.394	203.20±10.00
73230-5330	6.000±.394	152.40±10.00
PART NO.	IN	MM
	L	

FUNCTIONAL SYMBOLS $\nabla_A = 0$ $\nabla_C = 0$ $\nabla_P = 0$ DIVISIONAL SYMBOLS 4 PLACES ± 3 PLACES ± 2 PLACES ± 1 PLACE ± 0 PLACES ±	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION		CURRENT REV DESC:		CA, MCX PLUG R/A WITH RG179/U CABLE 50 OHMS, EWR#: 14551-A PRODUCT CUSTOMER DRAWING
	DIMENSION UNITS	SCALE	EC NO: 675788		
	MM/INCH	4:1	DRWN: YHUANG11	2021/06/10	
	GENERAL TOLERANCES (UNLESS SPECIFIED)		CHK'D: WANGR2	2021/09/03	
ANGULAR TOL ± °		APPR: LCHEN03	2021/09/06	DOCUMENT NUMBER	
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		THIRD ANGLE PROJECTION	DRAWING	SERIES	MATERIAL NUMBER
			C-SIZE	73230	732305330
					CUSTOMER
					GENERAL MARKET
					SHEET NUMBER
					1 OF 1