

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION
ALL RIGHTS RESERVED.

REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
C1		REVISED PER ECO-18-004113	15MAR18	R.L	H.L



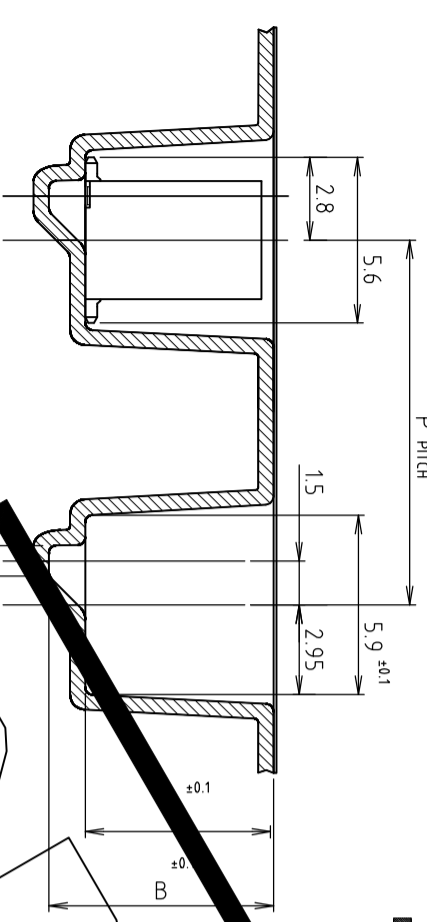


Fig-1

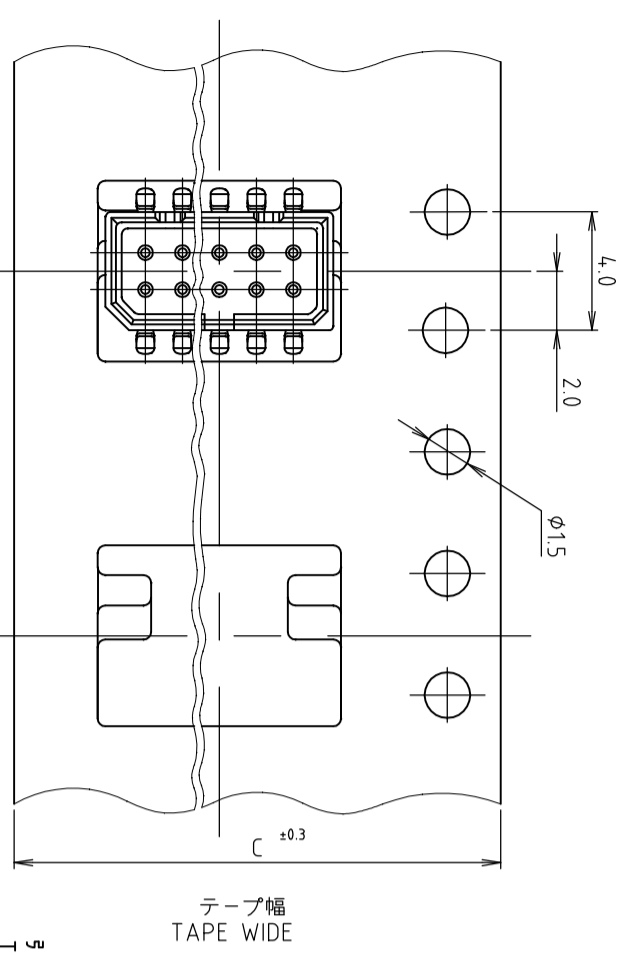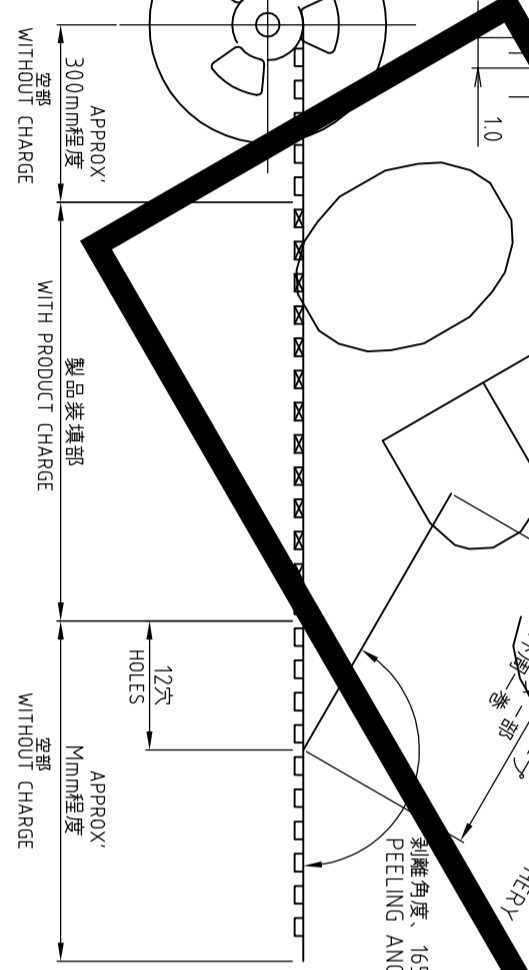

WEEEDING THE COVER TAPE
AROUND THE OUTER PERIPHERY
IN A TURN
カバ-テープを
外周巻部
カバ-テープを
外周巻部

剥離角度 165°~180°
PEELING ANGLE

注記
1. 包装規格:107-5123-5
NOTE
1. PACKAGING SEPC:107-5123-5

鉛フリー
LEAD FREE

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:
mm
TOLERANCES UNLESS
OTHERWISE SPECIFIED:

φ-PLC	±
1-PLC	±
2-PLC	±
3-PLC	±
4-PLC	±

DWN S.KANEKI 28MAY92
CHK J.TANIGAWA 28MAY92
APVD S.KUBOUCHI 30SEP92
PRODUCT SPEC
APPLICATION SPEC
WEIGHT 0.000000

NAME 1.25 F-P CONNECTOR
(B-TO-B) DOUBLE ROW POST HDR ASS'Y
STE TE Connectivity Ltd.

OBSELETE	29	26	300	12	24	7.45	6.25	7.25	8.20	6-	2	2-178041-4	5-	4
W ₂	W ₁	M	P	C	B	A	数量 QTY/REL	箱数 Pcs	エ-ポキシ-7 EMISS TARE P/N	コネクタ標準 CONNECTOR P/N	リ-ル巻部 TARE P/N			

CUSTOMER DRAWING

SIZE A3
CAGE CODE 007779
DRAWING NO. 177595

SCALE SHEET 1 OF 1 REV C1