


REVISIONS

REV	ECR	DESCRIPTION	DRAWN	DATE
1		ENGINEERING RELEASE	P. BURDGE	09/10/2020

-XX IN THE ENDING OF THE CABLE PART NUMBER IS CALLING OUT THE LENGTH OF THE ASSEMBLY FROM CENTER TO CENTER OF CONNECTORS. EXAMPLE(S) SHOWN BELOW:


LTI P/N: CB0.81-2IPX-6IN (6 INCHES)
 CB0.81-2IPX-11.5IN (11.5 INCHES)

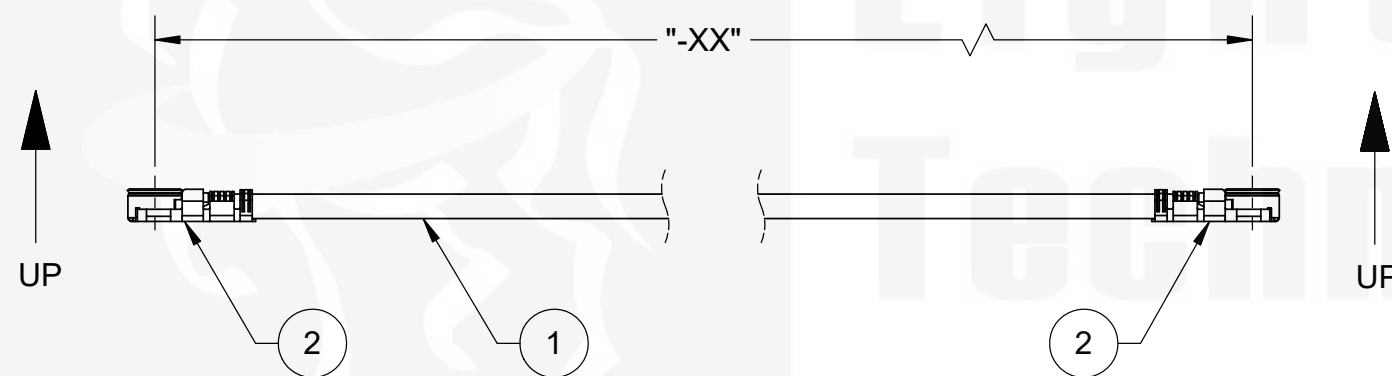

LENGTH TOLERANCE FOR CABLE ASSEMBLIES	
Inches	Millimeters
0 - 2IN +/- 0.040	0 - 51 +/- 1
2IN - 6IN +/- 0.080	51 - 153 +/- 2
6IN - 12IN +/- 0.140	153 - 305 +/- 3.5
12IN - 48IN +/- 0.250	305 - 1219 +/- 6.4
48IN - 144IN (12FT) +/- 0.500	1219 - 3658 +/- 13
144IN (12FT) - ABOVE +/- 1.0	3658 - ABOVE +/- 25
UNLESS OTHERWISE SPECIFIED ON DRAWING	

ITEM	PART NUMBER	DESCRIPTION	QTY
1	0.81MM MICRO COAX	CABLE, 0.81 MICRO COAX, WHITE	AR
2	IPX4LLF11GPB-081	IPX4L (MHF4L), RHT ANGLE, JACK, CABLE CRIMP	2

MHF IS A REGISTERED TRADEMARK OF I-PEX CO., LTD. CORPORATION

DO NOT SCALE DRAWING		 Lighthouse Technologies San Diego, CA WWW.RFCONNECTOR.COM
TOLERANCES UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS X = ±0.5 X.X = ±0.25 X.XX = ±0.13 ANGLE = ±30'		
TITLE: CABLE ASSEMBLY, IPX4L (MHF4L), R/A JACK, CRIMP TO IPX4L (MHF4L), R/A JACK, CRIMP USING 0.81 MICRO COAX, WHITE		
CUSTOMER APPROVAL SIGN / DATE:		SIZE: B PART/DWG. NO: CB0.81-2IPX4L-XXIN REV: 1
ENG APPR. CHECKED DRAWN: P. BURDGE NAME: P. BURDGE DATE: 09/10/2020	THIRD ANGLE PROJECTION	SCALE: 4:1 FILE NAME: _____ SHEET 1 OF 1

PROPRIETARY AND CONFIDENTIAL

UNLESS OTHERWISE SPECIFIED: THIS DOCUMENT CONTAINS LIGHORSE TECHNOLOGIES INFORMATION. REPRODUCTION, USE, DISCLOSURE OR TRANSMITTAL OF ALL OR ANY PART OF THIS DOCUMENT IS PROHIBITED EXCEPT TO THE EXTENT APPROVED IN WRITING BY AN AUTHORIZED REPRESENTATIVE OF LIGHORSE TECHNOLOGIES. LIGHORSE TECHNOLOGIES RESERVES ALL RIGHTS UNDER PATENTS, TRADEMARKS, COPY RIGHTS AND TRADE SECRETS. COPY RIGHTS OF LIGHORSE TECHNOLOGIES 2011, ALL RIGHTS RESERVED.

