

ITEM	PART#	DESCRIPTION	QTY	UOM
A	39012045	4CKT RECEPTACLE HOUSING 555704R210	1	PC
B	39000077	MiniFit Term Crp Fem Chn Bs Tin 16awg	4	PC
C	--	PAPER PRINTED PAPER WHITE	1	PC

FROM	TO	DESCRIPTION	COLOR
A1	--	1X16AWG DISC PVC BK UL1015 HOOKUP	BLACK
A2	--	1X16AWG DISC PVC BK UL1015 HOOKUP	BLACK
A3	--	1X16AWG DISC PVC BK UL1015 HOOKUP	BLACK
A4	--	1X16AWG DISC PVC BK UL1015 HOOKUP	BLACK

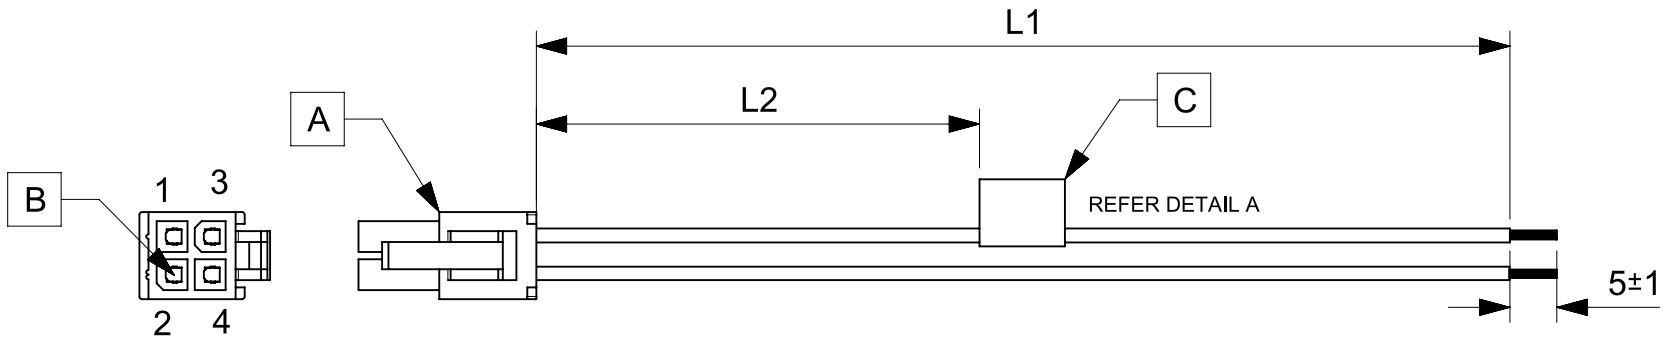


TABLE			
PART NUMBER	L1	L2	TITLE
2153261041	150±8	63 REF	MINIFIT JR DR R-S 4 CIRCUIT 150MM Sn
2153261042	300±10	138 REF	MINIFIT JR DR R-S 4 CIRCUIT 300MM Sn
2153261043	600±10	288 REF	MINIFIT JR DR R-S 4 CIRCUIT 600MM Sn

- NOTES**
1. Connector view shown is from mating side.
 2. Free ends must be stripped, twisted & tinned. The length of tinning is 5±1mm. Tinning dia must be 1.8mm Max.
 3. Label text must be 2mm max. in height with Arial font.
 4. Label must be wrapped in Flag type on a single cable.

MOLEX P/N
MOLEX
BATCH WK/YR
DETAIL A

REVISION			
DATE	REV	DESCRIPTION	CHANGER
2020/03/19	A	INITIAL RELEASE	ARAJU

FUNCTIONAL SYMBOLS $\frac{F}{A} = 0$ $\frac{F}{E} = 0$ $\frac{F}{P} = 0$ DIVISIONAL SYMBOLS	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION DIMENSION UNITS: mm SCALE: NTS CURRENT REV DESC: GENERAL TOLERANCES (UNLESS SPECIFIED) ANGULAR TOL ± ° 4 PLACES ± 3 PLACES ± 2 PLACES ± 1 PLACE ± 0 PLACES ± DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS	EC NO: 638379 DRWN: ARAJU 2020/03/19 CHK'D: RDESAI01 2020/05/28 APPR: RDESAI01 2020/05/28 INITIAL REVISION: DRWN: ARAJU 2020/03/19 APPR: RDESAI01 2020/05/28		
	SEE TABLE		PRODUCT CUSTOMER DRAWING	
	DOCUMENT NUMBER 2153261041	DOC TYPE PSD	DOC PART 000	REVISION A
	MATERIAL NUMBER SEE TABLE	CUSTOMER GENERAL MARKET	SHEET NUMBER 1 OF 1	