

ECN/PCN No.: 4116

| For Manufacturer | | | |
|--|--|--|--|
| Product Description: PLASTIC SMD MEMS OSCILLATOR | Abracon Part Number / Part Series: ASTMTXK | <input type="checkbox"/> Documentation only <input type="checkbox"/> ECN <input checked="" type="checkbox"/> EOL | <input checked="" type="checkbox"/> Series <input type="checkbox"/> Part Number |
| Affected Revision: A | New Revision: EOL | Application: | <input type="checkbox"/> Safety <input checked="" type="checkbox"/> Non-Safety |
| Prior to Change: Active https://abracon.com/Oscillators/ASTMTXK.pdf | | | |
| After Change: EOL | | | |
| Cause/Reason for Change: Discontinuation of manufacturing capability. | | | |
| Change Plan | | | |
| Effective Date: 2/7/2022 | Additional Remarks: N/A | | |
| Change Declaration: N/A | | | |
| Issued Date: 2/7/2022 | Issued By: | Issued Department: | |
| Approval: | Approval: | Approval: | |
| For Abracon EOL only | | | |
| Last Time Buy (if applicable): 5/7/2022 | Alternate Part Number / Part Series: none | | |
| Additional Approval: | Additional Approval: | Additional Approval: | |
| Customer Approval (If Applicable) | | | |
| Qualification Status: <input type="checkbox"/> Approved <input type="checkbox"/> Not accepted <i>Note: It is considered approved if there is no feedback from the customer 1 month after ECN/PCN is released.</i> | | | |
| Customer Part Number: | | Customer Project: | |
| Company Name: | Company Representative: | Representative Signature: | |
| Customer Remarks: | | | |

Ultra-miniature, Low Power, 32.768kHz MEMS Oscillator



1.54 x 0.84 x 0.60mm

ASTMTXK



RoHS/RoHS II compliant

Moisture Sensitivity Level (MSL) – 1

FEATURES:

- Smallest 32.768kHz TCXO in the market: 1.54 x 0.84 x 0.6mm
- Supply Voltage: 1.5V to 3.63V
- Ultra-Low Current Consumption: 1.52µA max.(core current, no load)
- Frequency Stabilities include: ±5ppm, ±10ppm, ±20ppm over 0 to +70°C and -40 to +85°C
- Internal power supply filtering eliminates external bypass capacitor for V_{dd} port.

APPLICATIONS:

- Fitness/Medical monitoring sensors
- Smart Meters
- Portable devices
- RTC reference clock

STANDARD SPECIFICATIONS:

| Parameters | Min | Typ | Max | Unit | Notes |
|---|-----------------|---------------------|---------------------|-------------------|--|
| Output Frequency (F _{out}) | 32.768 | | | kHz | |
| Frequency Stability over Temperature (F _{stab}) ⁽¹⁾ (without Initial Offset ⁽²⁾) | -5 | | +5 | ppm | Stability Option "G" |
| | -10 | | +10 | | Stability Option "Y" |
| | -20 | | +20 | | Stability Option "J" |
| Frequency Stability over Temperature (F _{stab}) (with Initial Offset ⁽²⁾) | -10 | | +10 | ppm | Stability Option "G" |
| | -13 | | +13 | | Stability Option "Y" |
| | -22 | | +22 | | Stability Option "J" |
| Frequency Stability vs Voltage (F _{Vdd}) | -0.75 | | +0.75 | ppm | 1.8V±10% |
| | -1.5 | | +1.5 | | 1.5-3.63V |
| Aging (@+25°C) | -1 | | +1 | ppm | First year. V _{dd} = 3.3V |
| Supply Voltage (V _{dd}) | 1.5 | | 3.63 | V | T _A = -40°C to +85°C |
| Core Supply Current (I _{dd}) ⁽³⁾ | | 0.99 | | µA | T _A = +25°C, V _{dd} : 1.8V. LVCMOS output. No load. |
| | | | 1.52 | | T _A = -40°C to +85°C, V _{dd} max: 1.5V - 3.63V. No load. |
| Power Supply Ramp (t _{Vdd Ramp}) | | | 100 | ms | T _A = -40°C to +60°C, 0 to 90%*V _{dd} |
| Start-up Time at Power-up (T _{start}) | | 180 | 300 | ms | T _A = -40°C to +60°C, valid output |
| | | | 350 | | T _A = +60°C to +70°C, valid output |
| | | | 380 | | T _A = +70°C to +85°C, valid output |
| Operating Temperature Range (T _{use}) | 0 | | +70 | °C | Option "N" |
| | -40 | | +85 | | Option "L" |
| Long Term Jitter | | | 2.5 | µs _{pp} | 81920 cycles (2.5sec), 100 samples |
| Period Jitter | | 35 | | ns _{RMS} | Cycles=10000, T _A = +25°C, V _{dd} :1.5-3.63V |
| LVCMOS Output Option (T _A = -40°C to +85°C. Typical values are at T _A = +25°C) | | | | | |
| Output Rise/Fall Time (t _r /t _f) | | 100 | 200 | ns | 10-90%(V _{dd}), 15pF load |
| | | | 50 | | 10-90%(V _{dd}), 5pF load, V _{dd} ≥1.62V |
| Output Clock Duty Cycle | 48 | | 52 | % | |
| Output Voltage | V _{OH} | 90%*V _{dd} | | V | V _{dd} :1.5-3.63V. I _{OH} = -1µA, 15pF |
| | V _{OL} | | 10%*V _{dd} | | V _{dd} :1.5-3.63V. I _{OL} = 1µA, 15pF |

Note:

1. No board level underfill. Measured as peak-to-peak/2. Inclusive of 3x-reflow and ±20% load variation. Tested with Agilent 53132A frequency counter. Due to the low operating frequency, the gate time must be ≥100ms to ensure an accurate frequency measurement.
2. Initial offset is defined as the frequency deviation from the ideal 32.768kHz at room temperature, past reflow.
3. Core operating current does not include output driver operating current or load current. To derive total operating current (no load), add core operating current + output driver operating current, where output driver operating current = C_{driver}*V_{out}*F_{out}.

Ultra-miniature, Low Power, 32.768kHz MEMS Oscillator



1.54 x 0.84 x 0.60mm

ASTMTXK




RoHS/RoHS II compliant

Absolute Maximum Ratings

Attempted operation outside the absolute maximum ratings may cause permanent damage to the part. Actual performance of the IC is only guaranteed within the operational specifications, not at absolute maximum ratings.

| Parameters | Test Condition | Value | Unit |
|---|--------------------------------------|--------------|-------------|
| Continuous Power Supply Voltage Range (V_{dd}) | | -0.5 to 3.63 | V |
| Short Duration Max. Power Supply Voltage (V_{dd}) | ≤ 30 minutes | 4.0 | V |
| Continuous Maximum Operating Temperature Range | $V_{dd}: 1.5-3.63V$ | 105 | $^{\circ}C$ |
| Short Duration Max. Operating Temperature Range | $V_{dd}: 1.5-3.63V, \leq 30$ minutes | 125 | $^{\circ}C$ |
| Human Body Model (HBM) ESD Protection | JESD22-A114 | 3000 | V |
| Charge-Device Model (CDM) ESD Protection | JESD22-C101 | 750 | V |
| Machine Model (MM) ESD Protection | JESD22-A115 | 300 | V |
| Latch-up Tolerance | JESD78 Compliant | | |
| Mechanical Shock Resistance | Mil 883, Method 2002 | 10000 | g |
| Mechanical Vibration Resistance | Mil 883, Method 2007 | 70 | g |
| 1508 CSP Junction Temperature | | 150 | $^{\circ}C$ |
| Storage Temperature | | -65 to +150 | $^{\circ}C$ |

Block Diagram

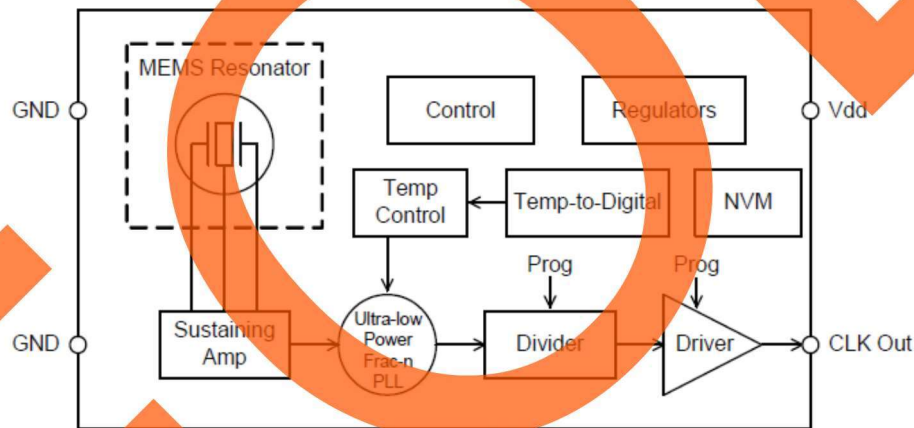

PART IDENTIFICATION:

ASTMTXK - 32.768 kHz - -

| Operating Temp. |
|-------------------------------------|
| N: $0^{\circ}C \sim +70^{\circ}C$ |
| L: $-40^{\circ}C \sim +85^{\circ}C$ |

| Freq. Stability |
|-----------------|
| G: $\pm 5ppm$ |
| Y: $\pm 10 ppm$ |
| J: $\pm 20 ppm$ |

| Packaging |
|----------------------------------|
| Blank: Bulk |
| T3: Tape & Reel (3kpcs / reel) |
| T10: Tape & Reel (10kpcs / reel) |

Ultra-miniature, Low Power, 32.768kHz MEMS Oscillator



1.54 x 0.84 x 0.60mm


ASTMTXK




RoHS/RoHS II compliant

Typical Performance Data (TA=25°C, Vdd=1.8V, unless otherwise stated)


Frequency Stability vs. Operating Temperature Range (Pre-Reflow)

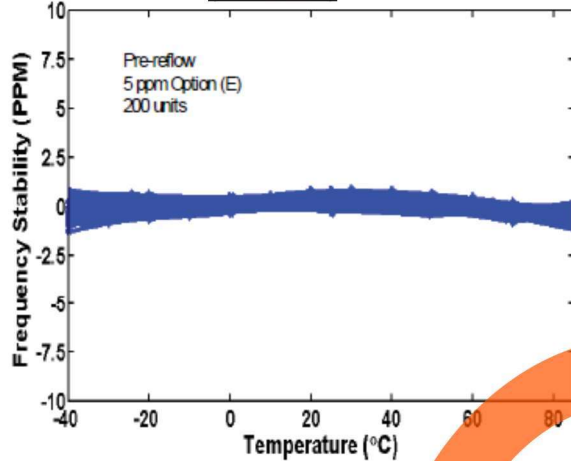


Frequency Stability vs. Operating Temperature Range (Post-Reflow)

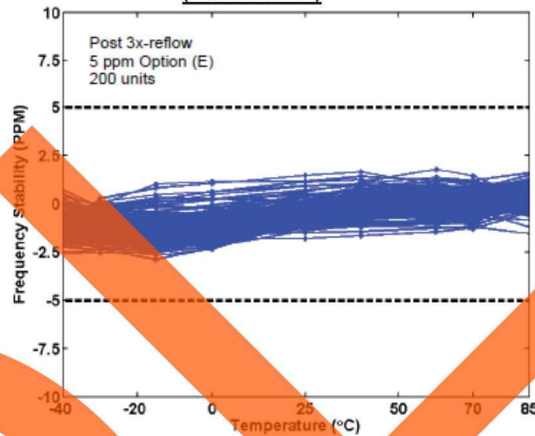


Core Current vs. Operating Temperature Range

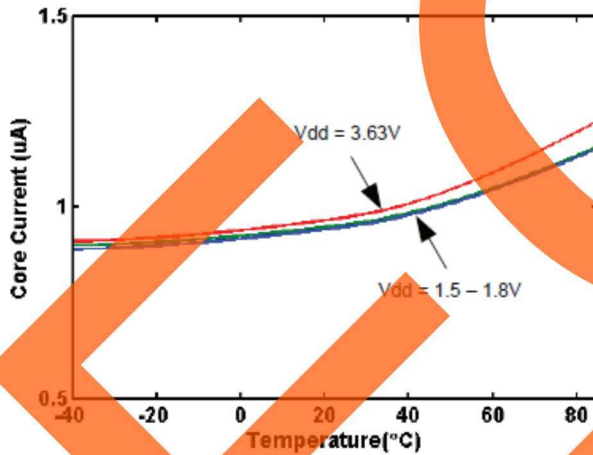

Total Supply Current vs. Operating Temperature Range (Core+LVC MOS Output Driver, No Load)

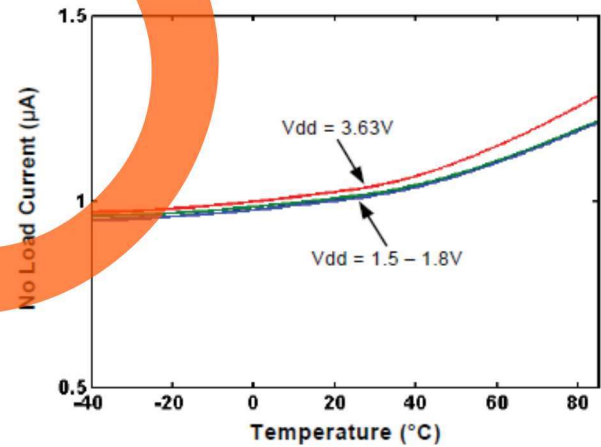

Start-up and Steady-State Current Profile

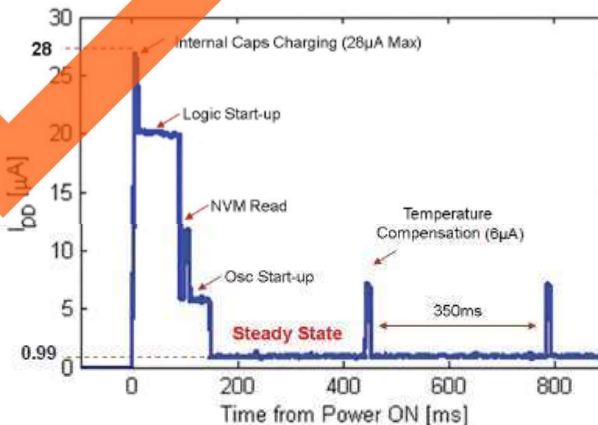

Ultra-miniature, Low Power, 32.768kHz MEMS Oscillator






1.54 x 0.84 x 0.60mm

ASTMTXK




RoHS/RoHS II compliant

PART IDENTIFICATION:

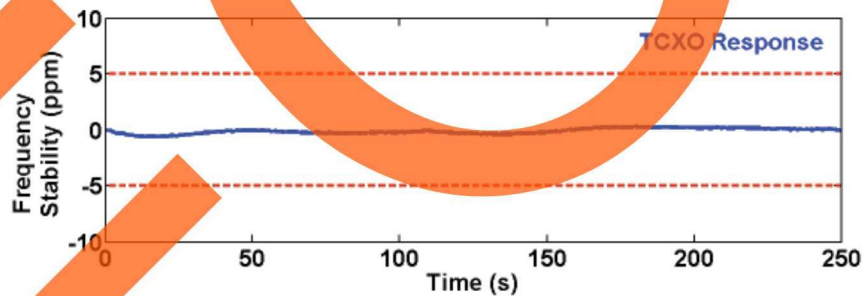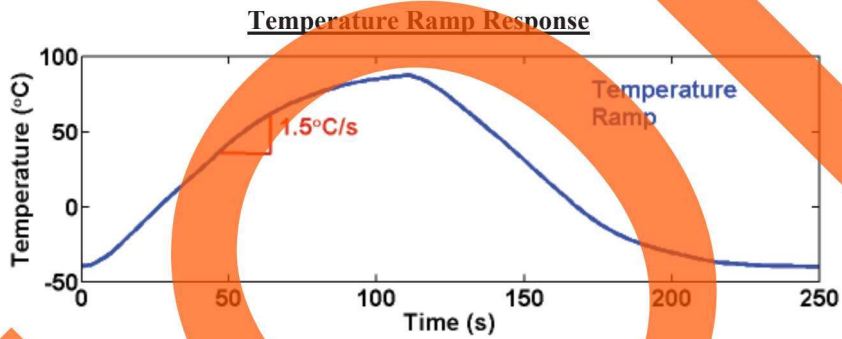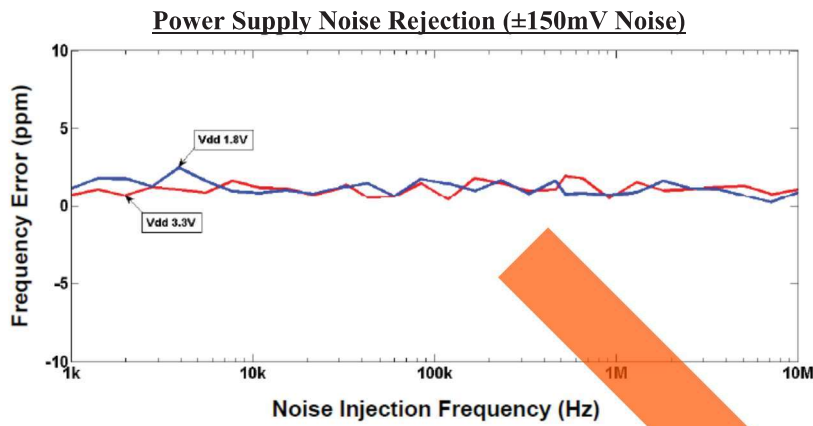

LVC MOS Output Waveform

($V_{\text{swing}} = 1.8\text{V}$, 10pF load)

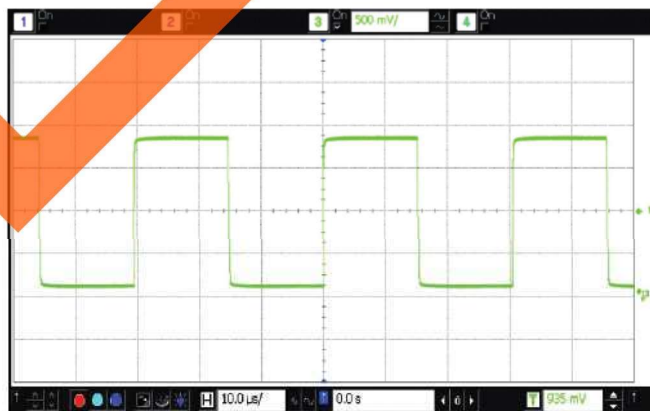

Ultra-miniature, Low Power, 32.768kHz MEMS Oscillator





1.54 x 0.84 x 0.60mm

ASTMTXK




RoHS/RoHS II compliant

OUTLINE DIMENSION:

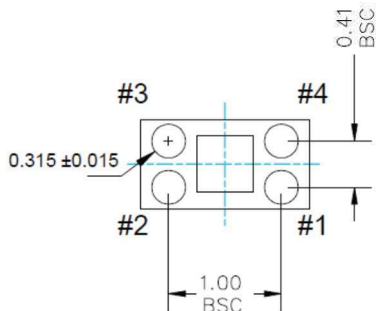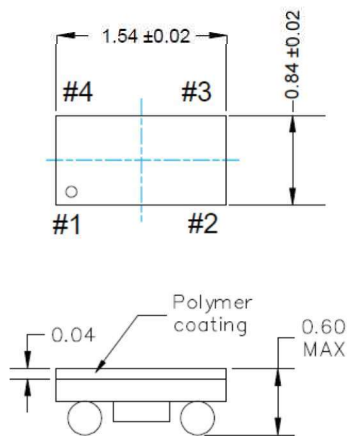

Recommended Land Pattern

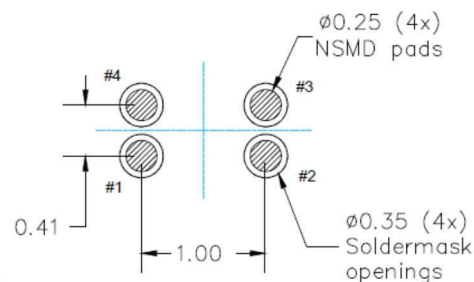


(soldermask openings shown with heavy dashed line)

Recommend 4-mil (0.1mm) stencil thickness

| Pin | Name | I/O | Functionality |
|-----|-----------------|---------------------|---|
| 1,4 | GND | Power Supply Ground | Connect to ground. All GND pins must be connected to power supply ground. The GND pins can be connected together, as long as both GND pins are connected to ground. |
| 2 | CLK Out | OUT | Oscillator clock output. |
| 3 | V _{dd} | Power Supply | Connect to power supply 1.5V ≤ V _{dd} ≤ 3.63V. Under normal operating conditions, V _{dd} doesn't require external bypass/decoupling capacitor(s). Internal power supply filtering will reject more than ±150mVpp with frequency components through 10MHz. |

Dimensions: mm

REFLOW PROFILE:

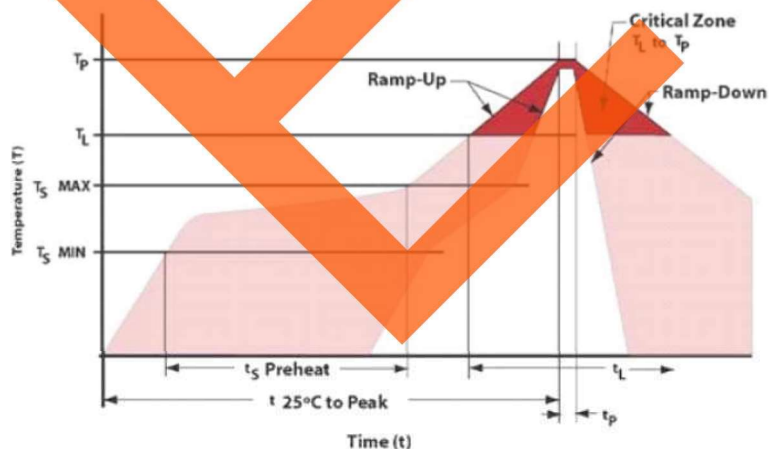

| Item | Conditions |
|---|------------------|
| T _S MAX to T _L (Ramp-up Rate) | 3°C/second max |
| Preheat | |
| Temperature Minimum (T _S MIN) | 150°C |
| Temperature Typical (T _S TYP) | 175°C |
| Temperature Maximum (T _S MAX) | 200°C |
| Time (t _s) | 60 – 180 seconds |
| Ramp-up Rate (T _L to T _P) | 3°C/second max |
| Time Maintained Above | |
| Temperature (T _L) | 217°C |
| Time (t _L) | 60 – 150 seconds |
| Peak Temperature (T _P) | 260°C max |
| Target Peak Temperature (T _P Target) | 255°C |
| Time within 5°C of actual peak (t _p) | 20 – 40 seconds |
| Max. Number of Reflow Cycles | 3 |
| Ramp-down Rate | 6°C/second max |
| Time 25°C to Peak Temperature (t) | 8 minutes max |

Ultra-miniature, Low Power, 32.768kHz MEMS Oscillator




1.54 x 0.84 x 0.60mm

ASTMTXK


Pb | RoHS/RoHS II compliant

TAPE & REEL:

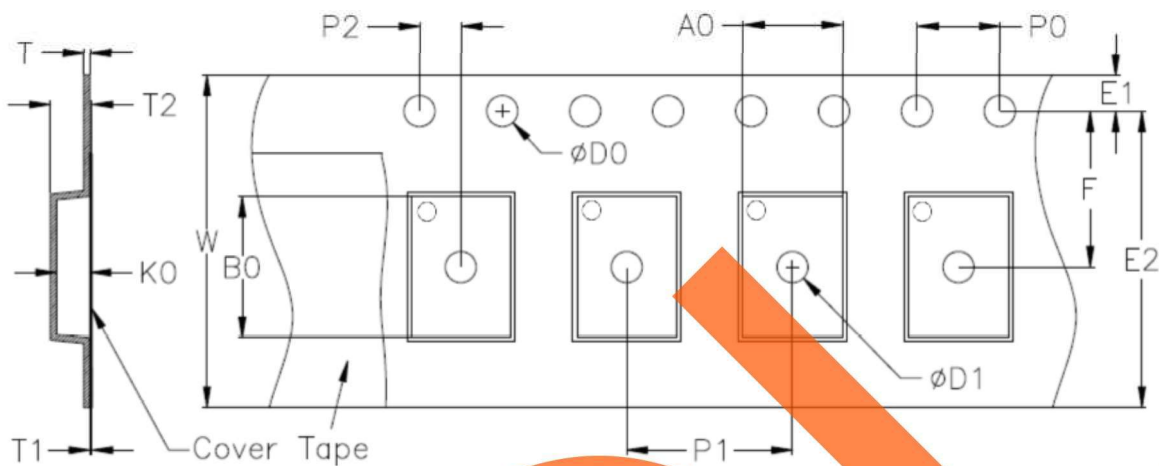

Unit: mm

| D0 | D1 min. | E1 | E2 min. | F | P0 | P1 | P2 |
|-----------|---------|----------|---------|-----------|-----------|-----------|----------|
| 1.55±0.05 | 0.18 | 1.75±0.1 | 6.05 | 3.5±0.05 | 4.0±0.1 | 4.0±0.1 | 2.0±0.05 |
| T | T1 max. | T2 max. | W max. | A0 | B0 | K0 | |
| 0.20±0.02 | 0.1 | 1.55 | 8.3 | 0.96±0.03 | 1.66±0.03 | 0.63±0.03 | |

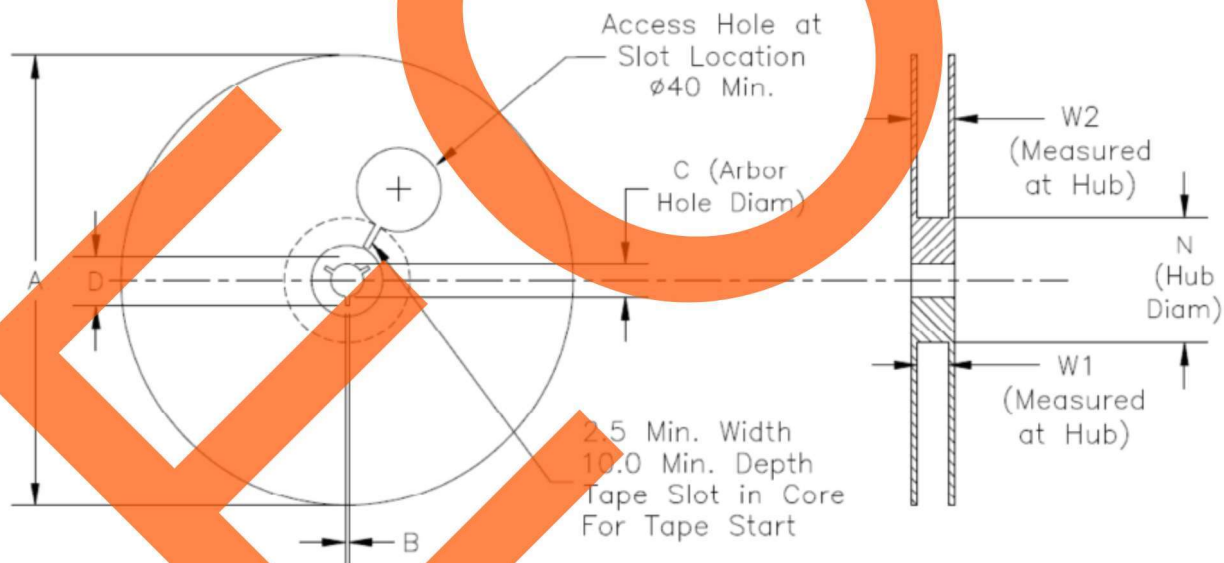

Unit: mm

| Option | A max. | B min. | C | D min. | N | W1 | W2 max. |
|--------|--------|--------|---------------|--------|---------|------------|---------|
| T3 | 180 | 1.5 | 13.0+0.6/-0.2 | 20.2 | 60±0.5 | 8.4+1.5/-0 | 14.4 |
| T10 | 330 | 1.5 | 13.0±0.2 | 20.2 | 100±0.5 | 8.4+1.5/-0 | 14.4 |

T3= Tape and reel (3,000pcs/reel)

T10= Tape and reel (10,000pcs/reel)

ATTENTION: Abracon LLC's products are COTS – Commercial-Off-The-Shelf products; suitable for Commercial, Industrial and, where designated, Automotive Applications. Abracon's products are not specifically designed for Military, Aviation, Aerospace, Life-dependent Medical applications or any application requiring high reliability where component failure could result in loss of life and/or property. For applications requiring high reliability and/or presenting an extreme operating environment, written consent and authorization from Abracon LLC is required. Please contact Abracon LLC for more information.



5101 Hidden Creek Ln Spicewood TX 78669
 Phone: 512-371-6159 | Fax: 512-351-8858
 For terms and conditions of sales, please visit:
www.abracon.com

REVISED: 05.27.2021

ABRACON IS
 ISO9001-2015
 CERTIFIED