


COIL: @ +25° C  
 RESISTANCE 700 OHMS ± 10%  
 NOMINAL VOLTAGE 26.5 VDC  
 MUST OPERATE 13.5 VDC  
 MUST RELEASE 1.5 VDC

ENVIRONMENT:  
 VIBRATION 10 CPS TO 2000 CPS @ 20 g's  
 SHOCK 100 g's 6 ± 1 MS. DURATION  
 TEMPERATURE -65 °C TO +125 °C

NOTES: \_\_\_\_\_  
 \_\_\_\_\_  
 \_\_\_\_\_

CUSTOMER DATA SHEET

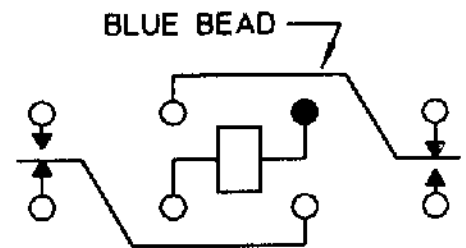

CONTACT RATING: LOW LEVEL TO 4A  
28 VDC RESISTIVE 100,000 OPERATIONS

DR. R.B. 5/5/94 CK 5/5/94

COMMUNICATIONS INSTRUMENTS, INC.

CUST. C. I. I. STD.  
 CUST. NO. \_\_\_\_\_

TYPE 'HFW' RELAY

HFW4A1131K00