

ITEM	PART#	DESCRIPTION	QTY	UOM
A,B	334720606	MX150 ASSY RCP 2x3 CPA BLK A/6	2	PC
C	330123001	MX150 RCPT 0.3 TIN 14/16AWG D WIND SLD	12	PC
D	884260070	PAPER PRINTED PAPER WHITE (S100X150YAJ)	1	PC

FROM	TO	CABLE PART#	DESCRIPTION	COLOR
A1	B3	100027101	14AWG DISC PVC BK OD 2.4 TXL BALAJI	BLACK
A2	B2	100027101	14AWG DISC PVC BK OD 2.4 TXL BALAJI	BLACK
A3	B1	100027101	14AWG DISC PVC BK OD 2.4 TXL BALAJI	BLACK
A4	B6	100027101	14AWG DISC PVC BK OD 2.4 TXL BALAJI	BLACK
A5	B5	100027101	14AWG DISC PVC BK OD 2.4 TXL BALAJI	BLACK
A6	B4	100027101	14AWG DISC PVC BK OD 2.4 TXL BALAJI	BLACK

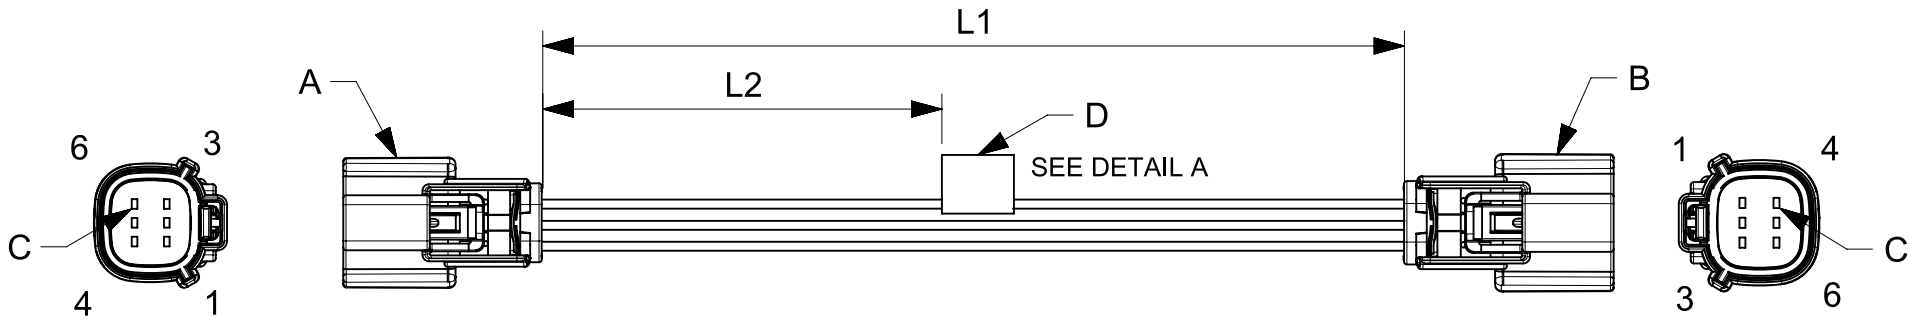


TABLE			
PART NUMBER	L1	L2	TITLE
2162851061	150±8	63 REF	MX150 R-R DR 6ckt 150mm Sn sealed cable
2162851062	300±10	138 REF	MX150 R-R DR 6ckt 300mm Sn sealed cable
2162851063	600±10	288 REF	MX150 R-R DR 6ckt 600mm Sn sealed cable

- NOTES**
1. Connector assembly must pass 100% continuity and polarity test.
 2. Sealing must pass the IP67 rating as defined by product specification.
 3. Connector view shown is from mating side.
 4. Label text must be 2mm max. in height with Arial font.
 5. Label must be wrapped in flag type on a single cable.

MOLEX P/N
MOLEX
BATCH WK/YR
DETAIL A

FUNCTIONAL SYMBOLS $\nabla_A = 0$ $\nabla_E = 0$ $\nabla_P = 0$	DIMENSION UNITS mm		SCALE NTS	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION		
	GENERAL TOLERANCES (UNLESS SPECIFIED)			CURRENT REV DESC:		
	ANGULAR TOL ± °			EC NO: 643544 DRWN: NNANKOLA 2020/06/29 CHK'D: SD 2020/08/31 APPR: SD 2020/08/31		
	DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS			INITIAL REVISION: DRWN: NNANKOLA 2020/06/29 APPR: SD 2020/08/31		
DIVISIONAL SYMBOLS		4 PLACES ± 3 PLACES ± 2 PLACES ± 1 PLACE ± 0 PLACES ±	THIRD ANGLE PROJECTION	DRAWING A4-SIZE	SERIES 216285	MOLEX REFER THE TABLE PRODUCT CUSTOMER DRAWING
DOCUMENT NUMBER 2162851061		DOC TYPE PSD	DOC PART 000	REVISION A	MATERIAL NUMBER SEE TABLE	
CUSTOMER GENERAL MARKET		SHEET NUMBER 1 OF 1				