

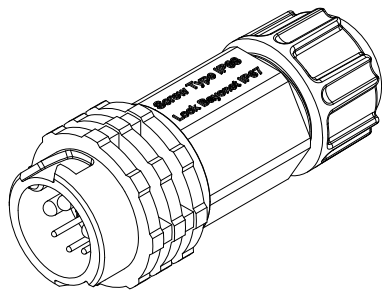
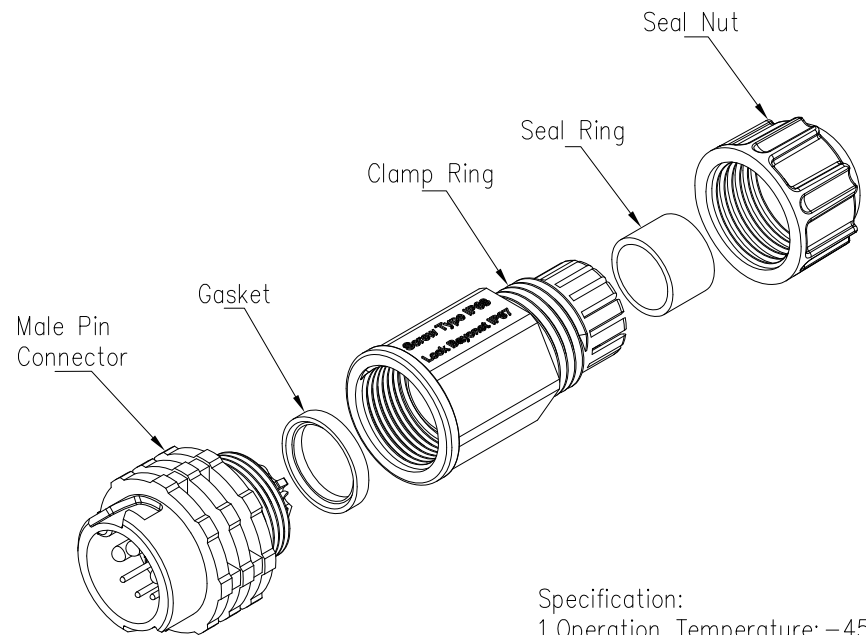

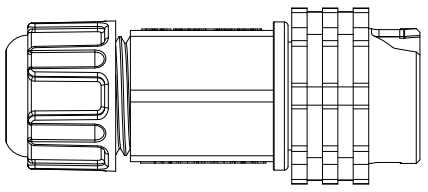


5	6	7	8
REV.	ECN NO.	DESCRIPTION	SIGN
C1	N/A	INITIAL DRAWING	Hary
			DATE
			2020/05/25

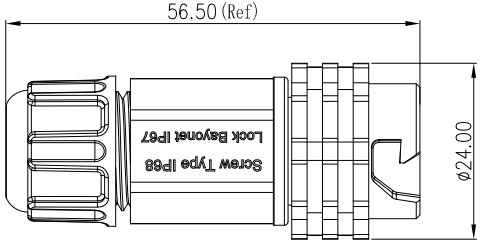

- Specification:
- 1.Operation Temperature: -45°C~105°C.
 - 2.Insulation Resistance:100MΩ at DC500V.
 - 3.Contact Resistance:<10mΩ.
 - 4.Withstand Voltage: 2500V AC
 - 5.Operating Current:20A/2A
 - 6.Operating Voltage:AC 250V
 - 7.Waterproof Rate:IP67 (Mated)
 - 8.Seal Nut:Nylon, Black
 - 9.Seal Ring:Silicon, Black.
 - 10.Clamp Ring:Nylon, Black
 - 11.Gasket:Silicon, Red
 - 12.Male Pin:Copper Alloy, Gold Plated
 - 13.Connector:Nylon+GF, Black
 - 14.RoHS Compliant.
 - 15.UL Compliant.
 - 16.Mating Cap:806-00076-00



(3+3) Pin
P/N: 23303331-XX

Pin Assignments
Front View

UNIT:mm	
TOLERANCE	
.X	±0.25
.XX	±0.15
.XXX	±0.05
ANGLES	±1°

DESCRIPTION	Middle Series Push Lock Male Plug With Female Pin		
SCALE:	1:1	SHEET	1 OF 1
REV.	C1	SIZE	A4
			* :Inspection Item

CHOGORI[®]

PART NO	23303331-05	DRAWN BY	Hary	DATE	2020/05/25
DWG NO		CHECKED BY	Mo	DATE	2020/05/25
CUSTOMER		APPROVED BY	Panson	DATE	2020/05/25

THIS INFORMATION IS CONFIDENTIAL AND IS DISCLOSED TO YOU ON CONDITION THAT NO FURTHER DISCLOSURE IS MADE BY YOU TO OTHER THAN CHOGORI PERSONNEL WITHOUT AUTHORIZATION FROM CHOGORI CORP.