

Surface Mount Power Splitter/Combiner

SCP-4-4-75+

4 Way-0° 75Ω

10 to 1000 MHz



Generic photo used for illustration purposes only
CASE STYLE: YY161

+RoHS Compliant

The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications

Maximum Ratings


| | |
|-----------------------------|----------------|
| Operating Temperature | -40°C to 85°C |
| Storage Temperature | -55°C to 100°C |
| Power Input (as a splitter) | 1W max. |
| Internal Dissipation | 0.375W max. |

Permanent damage may occur if any of these limits are exceeded.


Pin Connections

| | |
|----------|-------|
| SUM PORT | 3 |
| PORT 1 | 2 |
| PORT 2 | 4 |
| PORT 3 | 6 |
| PORT 4 | 8 |
| GROUND | 1,5,7 |

Outline Drawing

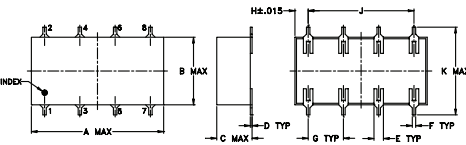

PCB Land Pattern




Suggested Layout,
Tolerance to be within ±.002

Outline Dimensions (inch/mm)

| A | B | C | D | E | F | G |
|-------|------|------|------|------|------|------|
| 0.75 | 0.38 | 0.28 | 0.01 | 0.05 | 0.02 | 0.2 |
| 19.05 | 9.65 | 7.11 | 0.25 | 1.27 | 0.51 | 5.08 |

| H | J | K | M | N | P | wt |
|-------|-------|-------|-------|------|------|-------|
| 0.075 | 0.6 | 0.45 | 0.47 | 0.1 | 0.15 | grams |
| 1.91 | 15.24 | 11.43 | 11.94 | 2.54 | 3.81 | 1.60 |

Demo Board MCL P/N: TB-184 Suggested PCB Layout (PL-175)

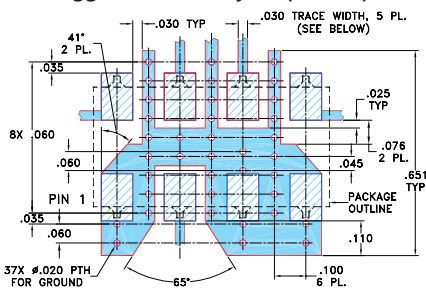

NOTE: 1. TRACE WIDTH IS SHOWN FOR FR4 WITH DIELECTRIC THICKNESS: .030 ± .002; COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.
2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.

- DENOTES PCB COPPER LAYOUT
- DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK

Notes

- Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- The parts covered by this specification document are subject to Mini-Circuit's standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuit's website at www.minicircuits.com/MCLStore/terms.jsp

Features

- wideband, 10 to 1000 MHz
- high isolation, 32 dB typ
- excellent amplitude unbalance, 0.4 dB typ.

Applications

- cellular
- CATV
- receivers/transmitters

Electrical Specifications




| FREQ. RANGE (MHz) | ISOLATION (dB) | | | INSERTION LOSS (dB) ABOVE 6 dB | | | PHASE UNBALANCE (Degrees) | | | AMPLITUDE UNBALANCE (dB) | | | | | | | | |
|-------------------|----------------|-----------|-----------|--------------------------------|-----------|-----------|---------------------------|------|------|--------------------------|------|------|---|---|----|-----|-----|-----|
| | L | M | U | L | M | U | L | M | U | L | M | U | | | | | | |
| f_L - f_U | Typ. Min. | Typ. Min. | Typ. Min. | Typ. Max. | Typ. Max. | Typ. Max. | Max. | Max. | Max. | Max. | Max. | Max. | | | | | | |
| 10-1000 | 36 | 20 | 32 | 18 | 24 | 14 | 0.5 | 1.0 | 0.65 | 1.3 | 0.8 | 2.0 | 3 | 6 | 12 | 0.2 | 0.4 | 0.9 |

L = low range [f_L to 10 f_L] M = mid range [10 f_L to $f_U/2$] U = upper range [$f_U/2$ to f_U]

Typical Performance Data

| Freq. (MHz) | Total Loss ¹ (dB) | | | | Amp. Unbal. (dB) | Isolation (dB) | | | Phase Unbal. (deg.) | VSWR S | VSWR 1 | VSWR 2 | VSWR 3 | VSWR 4 |
|-------------|------------------------------|------|------|------|------------------|----------------|-------|-------|---------------------|--------|--------|--------|--------|--------|
| | S-1 | S-2 | S-3 | S-4 | | 1-2 | 2-3 | 3-4 | | | | | | |
| 10.00 | 6.56 | 6.48 | 6.57 | 6.50 | 0.09 | 26.09 | 39.05 | 25.95 | 0.09 | 1.11 | 1.27 | 1.27 | 1.28 | 1.28 |
| 28.00 | 6.58 | 6.51 | 6.59 | 6.53 | 0.08 | 25.99 | 39.79 | 25.80 | 0.07 | 1.11 | 1.26 | 1.26 | 1.27 | 1.27 |
| 82.00 | 6.63 | 6.56 | 6.64 | 6.58 | 0.08 | 25.86 | 38.34 | 25.94 | 0.11 | 1.11 | 1.27 | 1.27 | 1.28 | 1.26 |
| 125.00 | 6.66 | 6.58 | 6.65 | 6.58 | 0.08 | 26.12 | 37.42 | 26.25 | 0.20 | 1.11 | 1.27 | 1.27 | 1.27 | 1.26 |
| 200.00 | 6.71 | 6.64 | 6.71 | 6.63 | 0.08 | 26.87 | 35.99 | 26.84 | 0.20 | 1.10 | 1.26 | 1.27 | 1.27 | 1.26 |
| 275.00 | 6.73 | 6.67 | 6.74 | 6.63 | 0.11 | 27.64 | 34.09 | 27.28 | 0.26 | 1.10 | 1.25 | 1.26 | 1.26 | 1.25 |
| 350.00 | 6.72 | 6.68 | 6.75 | 6.65 | 0.10 | 27.84 | 31.86 | 27.36 | 0.27 | 1.10 | 1.25 | 1.26 | 1.25 | 1.24 |
| 425.00 | 6.80 | 6.77 | 6.80 | 6.68 | 0.13 | 27.09 | 29.59 | 26.76 | 0.34 | 1.10 | 1.24 | 1.25 | 1.24 | 1.22 |
| 500.00 | 6.85 | 6.82 | 6.85 | 6.71 | 0.15 | 25.59 | 27.43 | 25.69 | 0.37 | 1.08 | 1.22 | 1.24 | 1.22 | 1.21 |
| 575.00 | 6.90 | 6.89 | 6.88 | 6.73 | 0.17 | 23.96 | 25.56 | 24.52 | 0.52 | 1.07 | 1.21 | 1.22 | 1.20 | 1.19 |
| 650.00 | 6.98 | 6.99 | 6.95 | 6.78 | 0.22 | 22.67 | 23.98 | 23.58 | 0.59 | 1.07 | 1.19 | 1.21 | 1.18 | 1.17 |
| 750.00 | 7.07 | 7.14 | 7.06 | 6.85 | 0.29 | 21.62 | 22.43 | 23.02 | 0.94 | 1.09 | 1.17 | 1.20 | 1.17 | 1.15 |
| 850.00 | 7.16 | 7.28 | 7.14 | 6.89 | 0.39 | 21.38 | 21.37 | 23.46 | 1.76 | 1.13 | 1.18 | 1.22 | 1.18 | 1.15 |
| 950.00 | 7.27 | 7.45 | 7.23 | 6.92 | 0.52 | 21.57 | 20.80 | 24.89 | 2.57 | 1.14 | 1.21 | 1.26 | 1.22 | 1.17 |
| 1000.00 | 7.32 | 7.55 | 7.29 | 6.96 | 0.59 | 21.44 | 20.64 | 25.48 | 3.07 | 1.13 | 1.24 | 1.29 | 1.25 | 1.21 |

1. Total Loss = Insertion Loss + 6dB splitter loss.

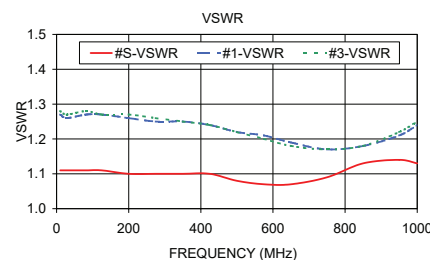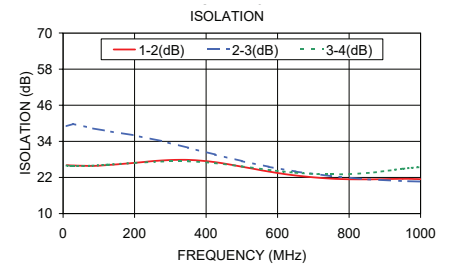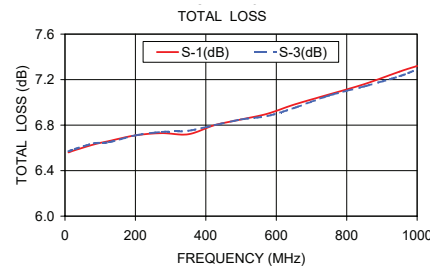

Electrical Schematic

