

Rev	AWO #	Description	Date	Appr
-		RELEASED	3/16/15	

6

5

4







3

2

1

APPROVED: \_\_\_\_\_

DATE: \_\_\_\_\_ TITLE: \_\_\_\_\_

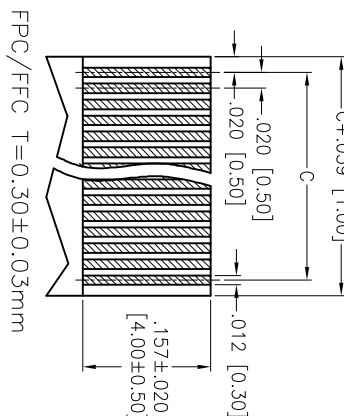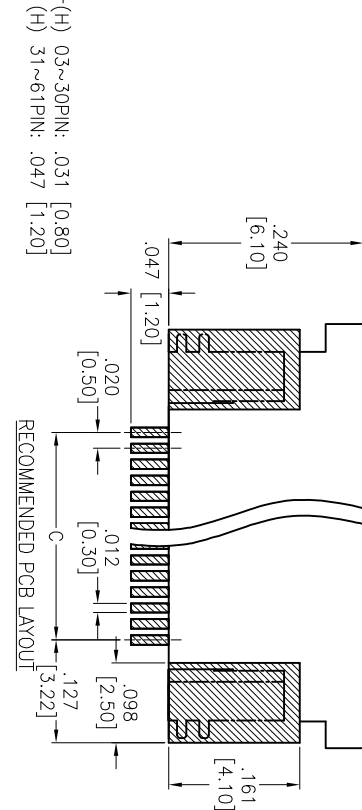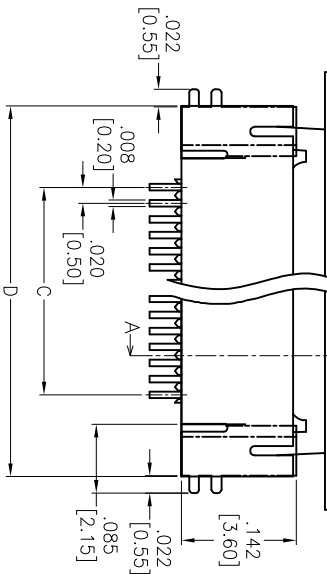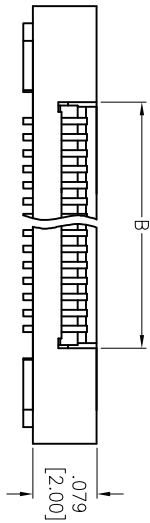

B

C

D

**SPECIFICATIONS:**

- Material: Insulator: HI-temp thermoplastic, rated UL 94V-0
- Insulator color: Natural
- Actuator: HI-temp thermoplastic, rated UL 94V-0, Color: Black
- Contacts: Phosphor Bronze
- Holddown: Brass, Tin plated
- Plating: Tin over Nickel underplate overall
- Electrical: Current rating: 0.5 Amps max
- Contact resistance: 30 mohms max
- Insulation resistance: 100 Mohms min
- Dielectric withstanding voltage: 250V AC for 1 minute
- Temperature Rating: Operating temperature: -25°C to +85°C
- Environmental: Lead free, RoHS compliant

**PACKAGED ON TAPE & REEL**

- Positions: 03 thru 61
- A = .020 [0.50] x No. of Spaces + .283 [7.20]
- B = .020 [0.50] x No. of Spaces + .043 [1.10]
- C = .020 [0.50] x No. of Spaces
- D = .020 [0.50] x No. of Spaces + .201 [5.10]

UNLESS OTHERWISE SPECIFIED  
ALL DIMENSIONS ARE INCHES [MM]  
TOLERANCES: EXCEPT AS NOTED  
INCHES Holes ±.10  
X .XX ±.020  
.XXX ±.015

**ADAM TECH**

909 Railway Avenue, Union, NJ 07083  
Phone: 908-687-5000 Fax: 908-687-5710

TITLE: ZIF FLEX CIRCUIT CONNECTOR, SMT TYPE  
SIDE ENTRY, UPPER CONTACT

APPROVALS	DATE	SIZE	PART NO.	REV.
DRAWN AY	3/16/15	X	PCA-6-LA-XX-HU-3-TR	-
CHECKED GC	3/16/15			
APPROVED		REF: S00169C	SCALE: NTS	SHEET 1 OF 1

6

5

4

3

2

1

