TOLERANCE
UNLESS OTHERWISE SPECIFIED

.X	±0.25
.XX	±0.13
.XXX	±0.05

THIS IS A C.A.D. GENERATED DRAWING
DO NOT MAKE MANUAL REVISIONS TO MASTER.

69.40
63.50
55.40
12.50
8.30
10°

6.10
11.00

20.33
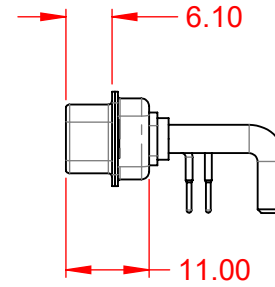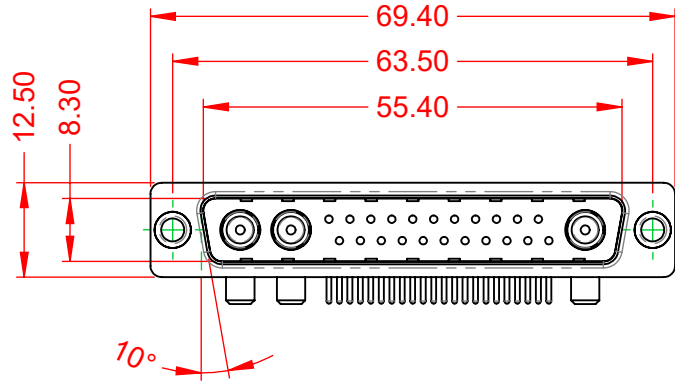
NOTES:

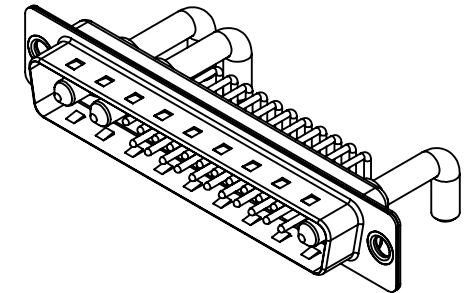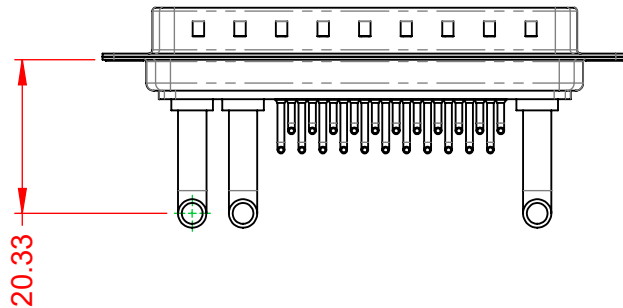MATERIAL:
HOUSING: THERMOPLASTIC POLYESTER, UL94V-0
SHELL: STEEL, NICKEL PLATED
CONTACT: COPPER ALLOY, GOLD FLASH PLATED

OPERATING TEMPERATURE: -55°C ~ 125°C

POWER/CO-AX CONTACT RATING: 40A (CURRENT)
(IF PRESENT)
SIGNAL CONTACT CURRENT RATING: 5A PER CONTACT
SIGNAL CONTACT RESISTANCE: 10mΩ MAX.

INSULATOR RESISTANCE: 5000MΩ min.
DIELECTRIC
  WITHSTANDING VOLTAGE: 1000V AC rms

COMBINATION D-SUB

EDAC INC
TORONTO, ONTARIO
CANADA
YOUR CONNECTION TO QUALITY & SERVICE

SW REFERENCE NO.:	629 COMBO ASSEMBLY
DRAWN: C.B	DATE: JAN. 01/2019
CHECKED:	DATE:
SCALE: (IN C.A.D. 1:1)	SHEET 1 OF 2
DRAWING NUMBER: 629-25W3250-4N1	ISSUE
PART NUMBER: 629-25W3250-4N1	1

ISSUE NUMBER

ORIGINAL ①

THIS IS A C.A.D. GENERATED DRAWING
DO NOT MAKE MANUAL REVISIONS TO MASTER.

TOLERANCE UNLESS OTHERWISE SPECIFIED	
.X	±0.25
.XX	±0.13
.XXX	±0.05

2W2

2WK2

5W1

3W3

3WK3

7W2

11W1

5W5

9W4

13W3

17W2

21W1

13W6

17W5

8W8

25W3

27W2

21W4

24W7

36W4

43W2

47W1

COMBINATION D-SUB

EDAC
EDAC INC
TORONTO, ONTARIO
CANADA
YOUR CONNECTION TO QUALITY & SERVICE

SW REFERENCE NO.:	629 COMBO ASSEMBLY
DRAWN: C.B	DATE: JAN. 01/2019
CHECKED:	DATE:
SCALE: N.T.S	SHEET 2 OF 2
DRAWING NUMBER: 629-25W3250-4N1	ISSUE
PART NUMBER: 629-25W3250-4N1	1